

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929














SWITCH-TOGGLE




CATALOG LISTING
12TW1 SERIES
CHART 2

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MS NUMBER ②	CATALOG LISTING ②	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	CIRCUIT MADE WITH TOGGLE LEVER IN		
			KEYWAY SIDE (1-2, 4-5)	CENTER (1-2, 4-5)	OPPOSITE KEYWAY (2-3, 5-6)
MS27721-21-1	12TW1-1	A,B,D,E,F,G,H,J,K,L,M,N,P	ON	OFF	ON
MS27721-22-1	12TW1-2	D, F, G	OFF	NONE	ON
MS27721-23-1	12TW1-3	D, F, G	ON	NONE	ON
	-21	E, F, K, M	NONE	OFF	ON
	-31	E, F, K, M	NONE	ON	ON
	-4	F	MOM OFF	NONE	ON
MS27721-31-1	12TW1-5	E, F, K, L, M, N	MOM ON	OFF	ON
	-6	F	MOM ON	NONE	OFF
MS27721-27-1	12TW1-7	E, L, N	MOM ON	OFF	MOM ON
MS27721-26-1	12TW1-8	F	MOM ON	NONE	ON
	-51	E	NONE	ON	MOM ON
	-61	E	MOM ON	OFF	NONE


L117
5A 125 VAC
RJ ④

"A" ②  LOCKED IN THREE POSITIONS	"B" ②  LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D" ②  LOCKED OUT OF CENTER POSITION	"E" ②  LOCKED IN CENTER POSITION	"F" ②  LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)
"G" ②  LOCKED IN EXTREME POSITION (KEYWAY SIDE)	"H" ②  LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"J" ②  LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K" ②  LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"L" ②  LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)
"M" ②  LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N" ②  LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	"P" ②  LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)		

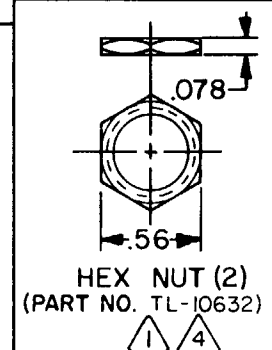

NOTES

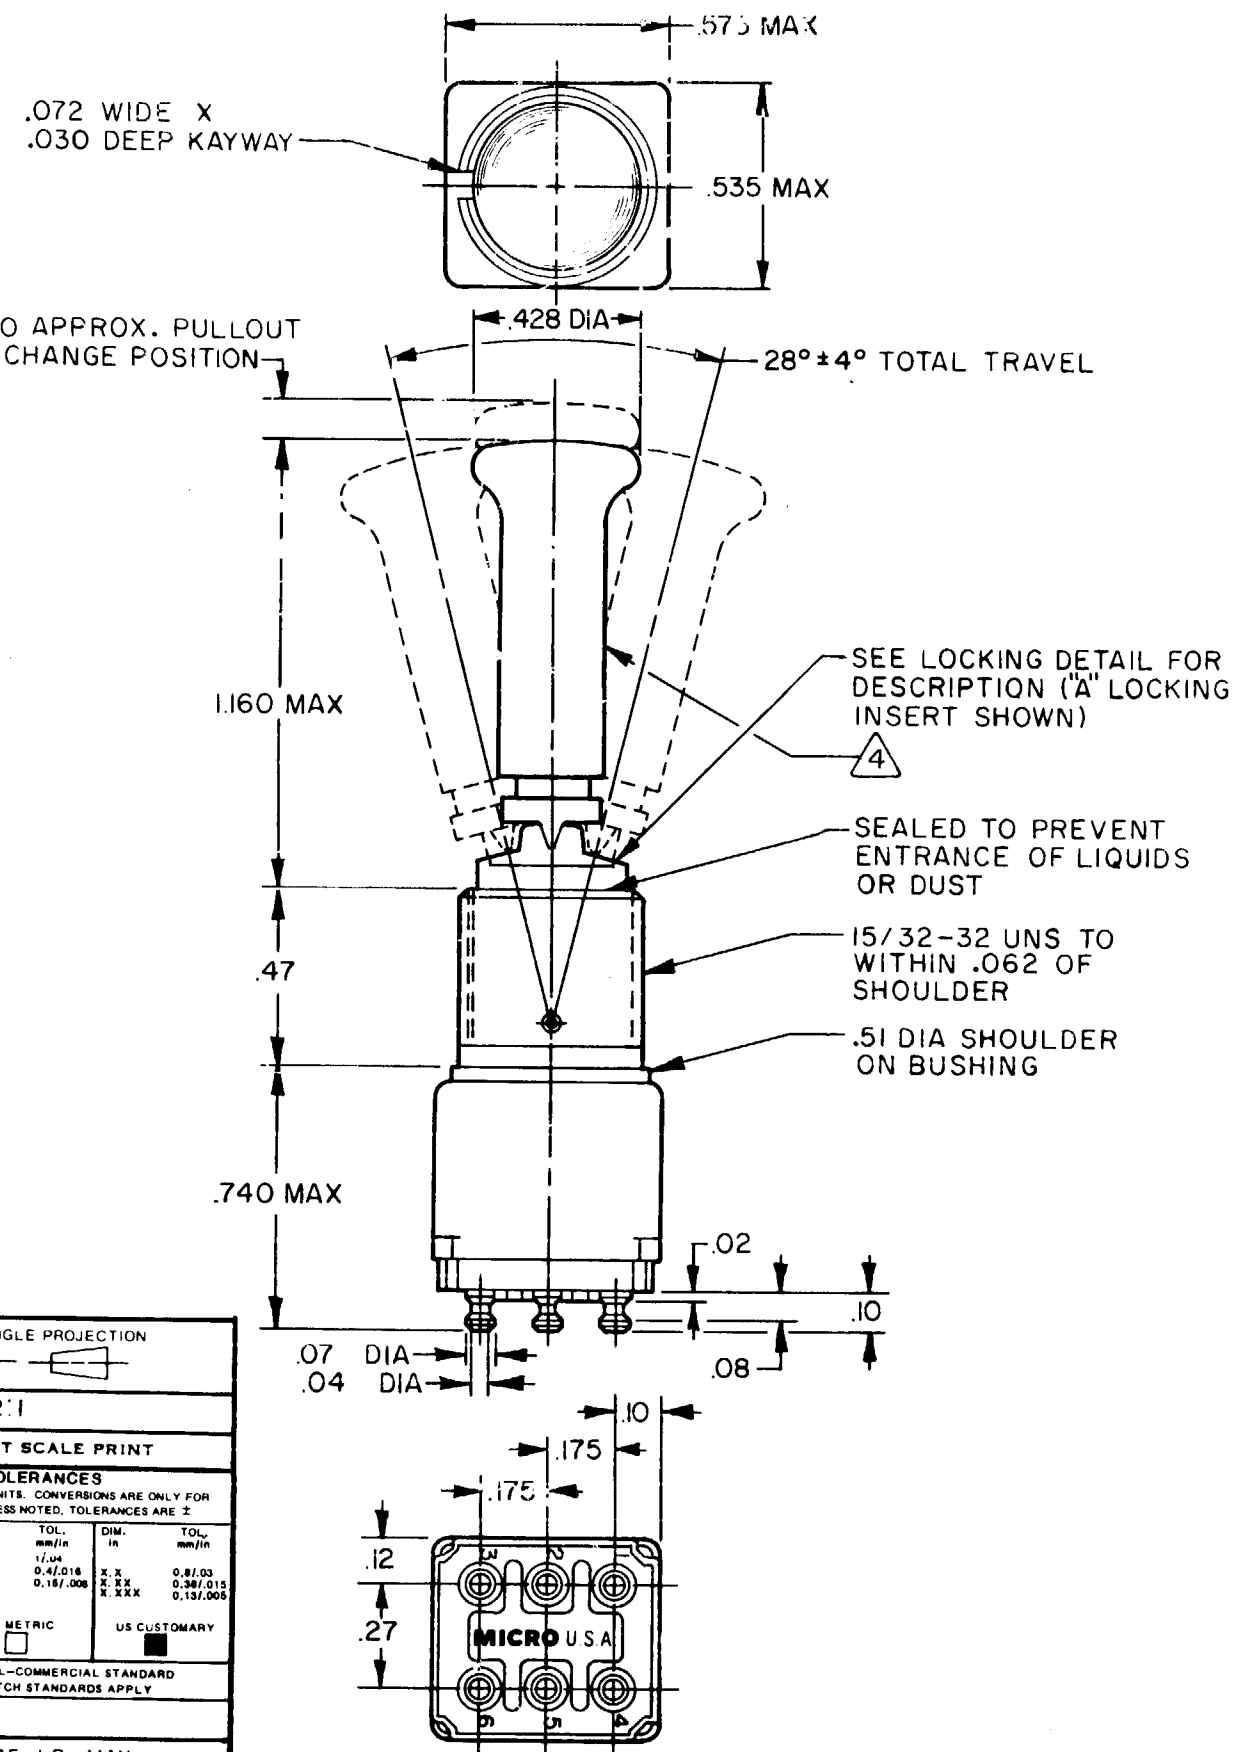- ① FURNISHED UNASSEMBLED
② SUFFIX MUST BE ADDED FOR DESIRED TYPE TOGGLE LOCKING
③ - TERMINALS ARE PLATED FOR SOLDERING
④ MATTE FINISH



THIRD ANGLE PROJECTION

SCALE 2:1

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	A	1/16	0.015
ONE PLACE	X, X	0.001	0.001
TWO PLACES	X, XX	0.0005	0.0005
THREE PLACES	X, XXX	0.0002	0.0002
ANGLES			

SI METRIC

US CUSTOMARY

DESIGN UNITS

RAW MATERIAL—COMMERCIAL STANDARD

MICRO SWITCH STANDARDS APPLY

WEIGHT .045 LB MAX

12TW1 SERIES
CHART 2DRAWING
NUMBER

1314

ISSUE

15

REVISIONS

A	CO 61252
B	JAP 87
C	CO62194
D	TSK 87
E	CO62939
F	TSK 88

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9