

BusBoard-3U-CONN - with connectors



Prototype circuit board with common connector footprints.

Features

- *BusBoard-3U-CONN* speeds assembly by providing footprints for common connectors plus a switch.
 - DB-9
 - DB-25
 - SPDT switch
 - coaxial power connector
 - BNC connector (2)
- The *BusBoard* zig-zag circuit pattern keeps opposite sides of an integrated circuit or connector on separate tracks to simplify wiring.
- Narrow and wide tracks identify connected pads. Indicator holes show wide tracks.
- DIP ICs and headers can be connected pin-to-pin without cutting traces or adding wires. It's ideal for memory buses and it provides easy power and grounds for other ICs.


- Opposite pins of a dual header can be on the same bus or different busses.
- Soldermask simplifies soldering and prevents solder bridges on tracks.
- Standard single height (3U) Eurocard/VME size. Many off the shelf enclosures and card cages are available.

Specifications

- **Lead Free** PCB with an anti-tarnish coating for easy soldering. RoHS compatible.
- Etched FR4 glass-epoxy circuit board.
- Solder mask to prevent solder bridges.
- Single sided PCB, 1oz/ft² copper.
- Holes are drilled on 0.1" (2.54mm) centers.
- 0.037" (0.94mm) holes sized for ICs or square post headers.
- 76 separate BusBoard traces.
- 3.9" wide, 6.3" long, 1/16" thick (100 x 160 x 1.6mm).

Order Part# BB3UC

Board Layout With Connectors

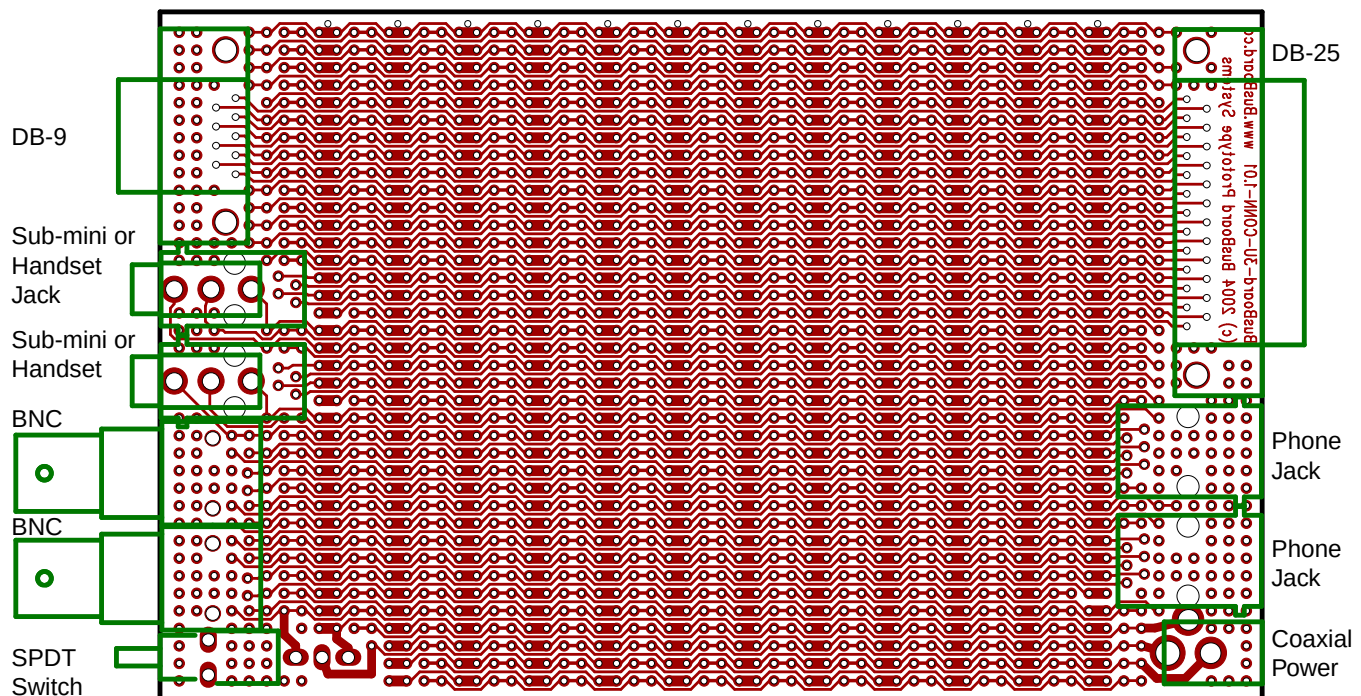

BusBoard Prototype Systems - Built for designers

www.BusBoard.com sales@busboard.com

BPS-MAR-BB3UC-001 Rev 4.00

Compatible Connectors

The following list provides suggestions for parts which can be used with BusBoard-3U-CONN. It is not an exhaustive list. In most cases, parts from many different manufacturers may be used.

Telephone Connectors

Amp 520249-2	Modular Phone Handset Jack, Right Angle, 4 Positions, 4 Contacts.
Amp 520257-2	Modular Phone Handset Jack, Vertical, 4 Positions, 4 Contacts.
Amp 520250-3	Modular Phone Jack, Right Angle, 6 Positions, 6 Contacts.
Amp 520258-3	Modular Phone Jack, Vertical, 6 Positions, 6 Contacts.

Barrel Coaxial Power Connectors

Switchcraft RAPC722Coaxial Barrel Power Connector, 2mm Center Pin.

Switchcraft RAPC712Coaxial Barrel Power Connector, 2.5mm Center Pin.

Sub-mini Connectors

Switchcraft 35RAPC2AV 1/8" Sub-Mini Jack, Right Angle.

BNC Connectors

Amp 227161-2	BNC Connector, Right Angle, Black Housing.
Amp 227161-1	BNC Connector, Right Angle, White Housing.
Molex 73137-5005	BNC Connector, Right Angle, Black Housing.
Molex 73137-5015	BNC Connector, Right Angle, White Housing.

Right Angle DB Connectors

Amp 748879-1	DB-9 Male Connector, Right Angle, PCB mount, 0.318 Style, Boardlocks, 4-40 Threaded Inserts.
Amp 748875-1	DB-9 Female Connector, Right Angle, PCB mount, 0.318 Style, Boardlocks, 4-40 Threaded Inserts.
Amp 748881-1	DB-25 Male Connector, Right Angle, PCB mount, 0.318 Style, Boardlocks, 4-40 Threaded Inserts.
Amp 748877-1	DB-25 Female Connector, Right Angle, PCB mount, 0.318 Style, Boardlocks, 4-40 Threaded Inserts.

Vertical DB Connectors

Amp 745051-2	DB-9 Male Connector, Vertical, PCB mount, 0.318 Style, 4-40 Threaded Inserts.
Amp 207841-4	DB-9 Female Connector, Vertical, PCB mount, 0.318 Style, 4-40 Threaded Inserts.
Amp 745053-2	DB-25 Male Connector, Vertical, PCB mount, 0.318 Style, 4-40 Threaded Inserts.
Amp 745058-4	DB-25 Female Connector, Vert, PCB mount, 0.318 Style, 4-40 Threaded Inserts.

SPDT Switches

E-Switch	100-SP-1-T1-B1-M7-Q-E	SPDT Switch, Right Angle, PCB Mount.
NKK	M2012SS2W30	SPDT Switch, Right Angle, PCB Mount.

Note: The ProtoBoard-3U-CONN provides the same connector footprints as the BusBoard-3U-CONN board (plus a RJ45 ethernet jack) with a ProtoBoard 6-hole strips instead of the BusBoard pattern. The BusBoard-3U-CONN board does not have a RJ11 ethernet connector footprint.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9