

## 868MHz PCB Mounting

### Features

- Omni directional Antenna
- Miniature Size:
- Length = 8.5mm
- DIA = 7mm
- VSWR <2
- 50Ω Impedance
- 0dBi Gain (nominal)



### Applications

- General Low Power Radio
- M2M Applications
- Telemetry

### Description

The BEAD Antenna provides a compact PCB mounting solution where a high performance is required from a small space .

Available as straight or 90 degree mount this antenna is a general purpose omni-directional

### Ordering Information

PART No	Description
ANT-BEAD-868	Miniature Bead Antenna
ANT-BEAD-86890	Miniature Bead Antenna R/A Leg

## Technical Data

### Parameter Description

Frequency Band	868 MHz
Nominal Impedance	50 ohm
Polarization	Vertical
Return Loss	Please See Data below
V.S.W.R	2.0: 1

### Mechanical


Antenna Type	External Antenna
Antenna Material	TPE EL630
Antenna Dimensions	14.5mm $\pm$ 2
Antenna Color	Black
Operating Temperature Range	-20°C~+60°C

### Notes

Optimum antenna performance is achieved with a Ground Plane. The following data was characterised with the setup as below  
Test PCB, Size: 137(L) x 57(W) x 1(H) mm (for ref.)


### Customisation

We are able to provide custom tuning of these antenna for specific customer applications. Please contact our sales dept for further information.

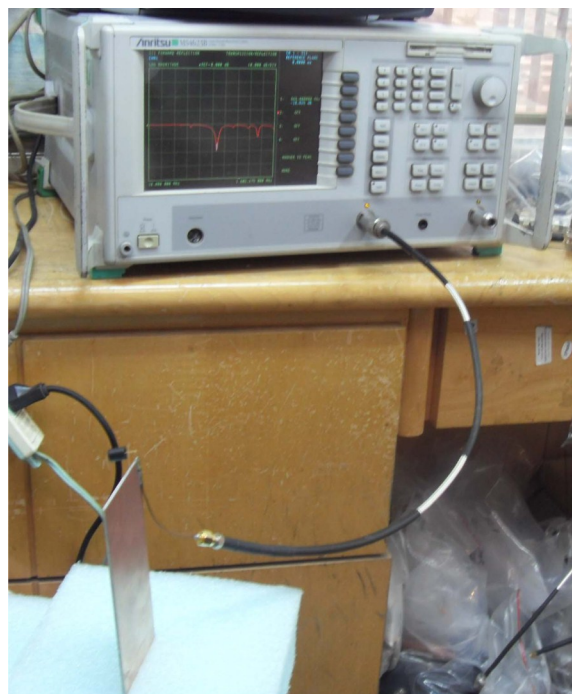


## Straight Leg Version


### Mechanical Detail

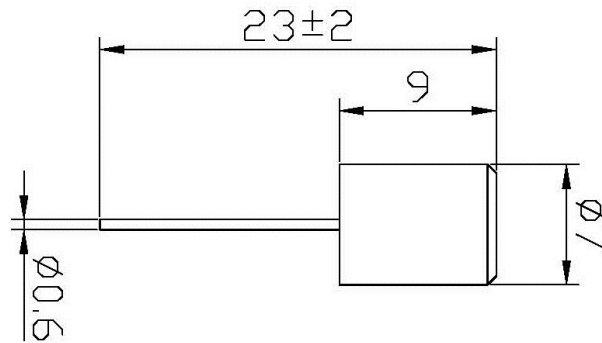


### Performance Data – SMITH CHART

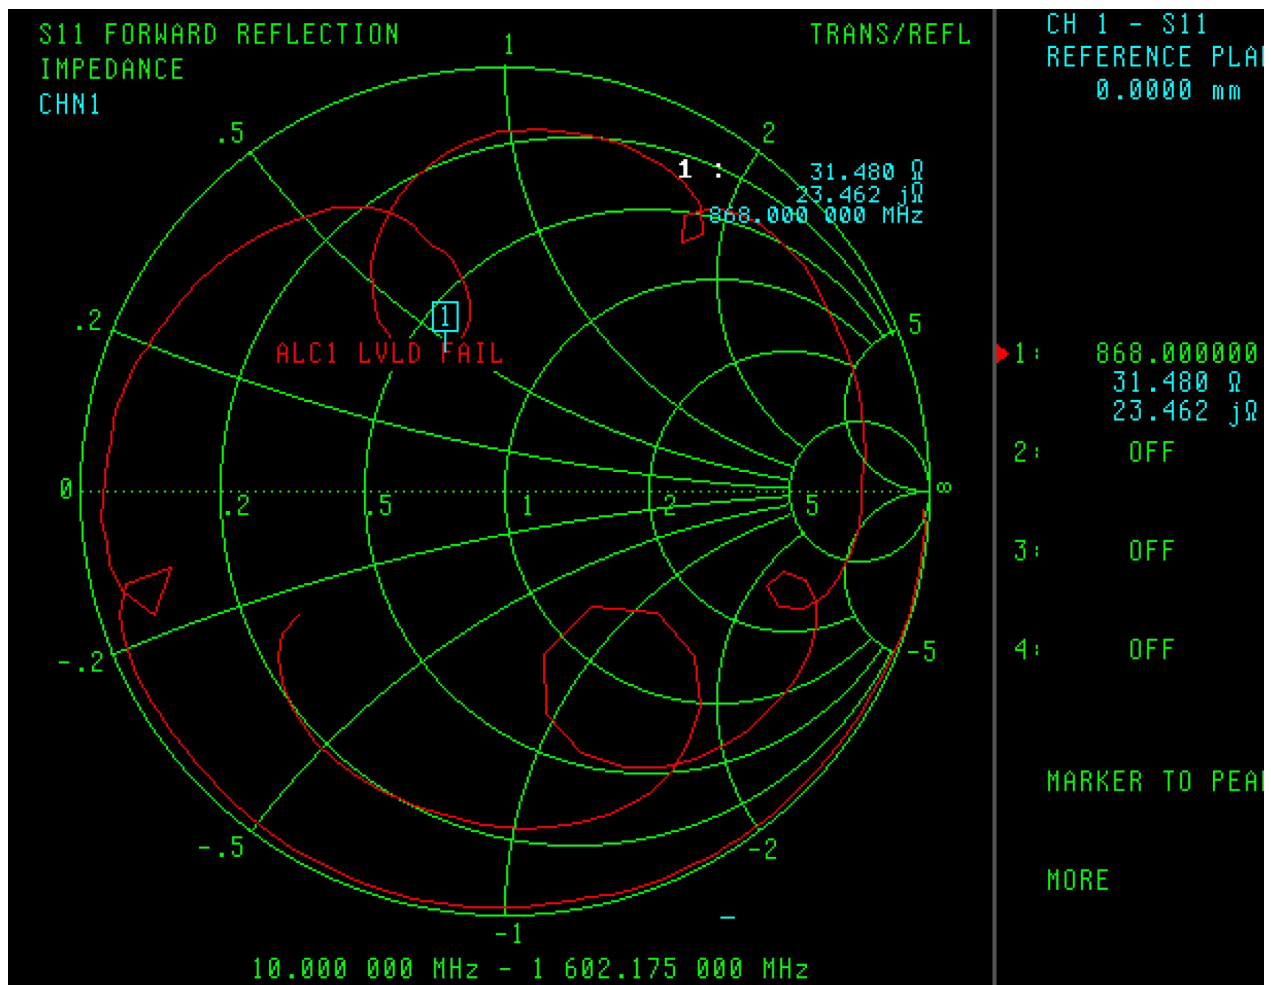

## Performance Data – VSWR

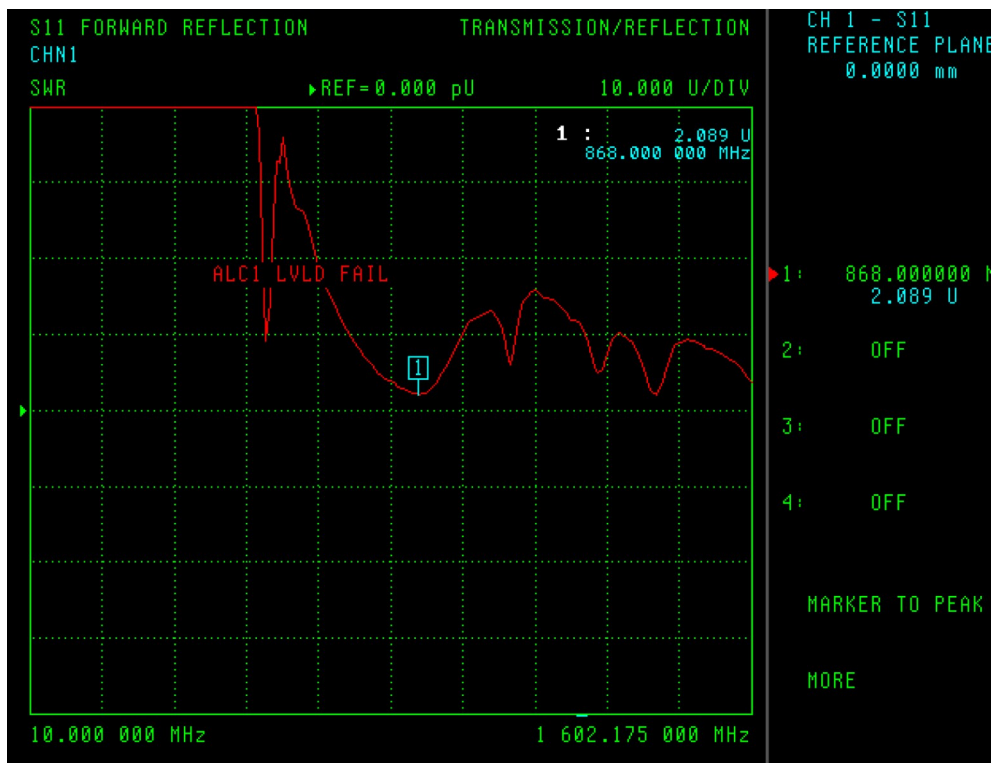


## Performance Data – RETURN LOSS

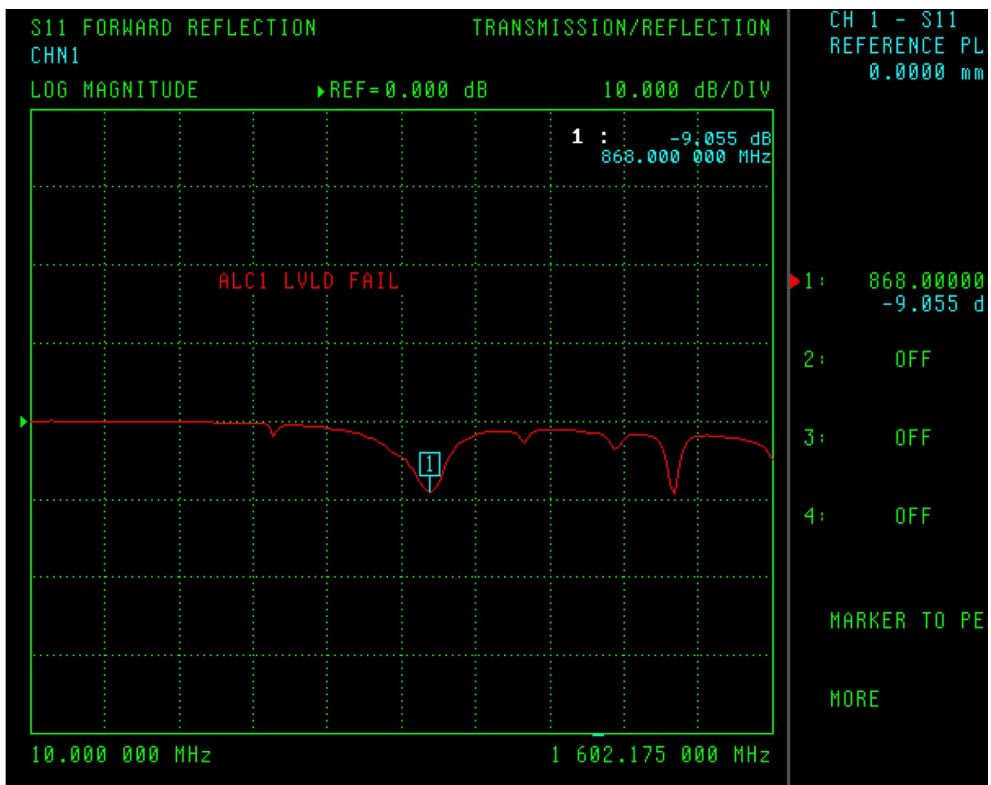


## Bent Leg Version


### Mechanical Detail

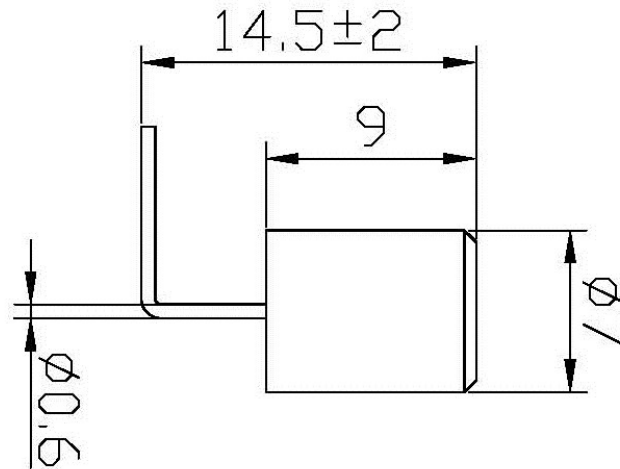


### Performance Data – SMITH CHART

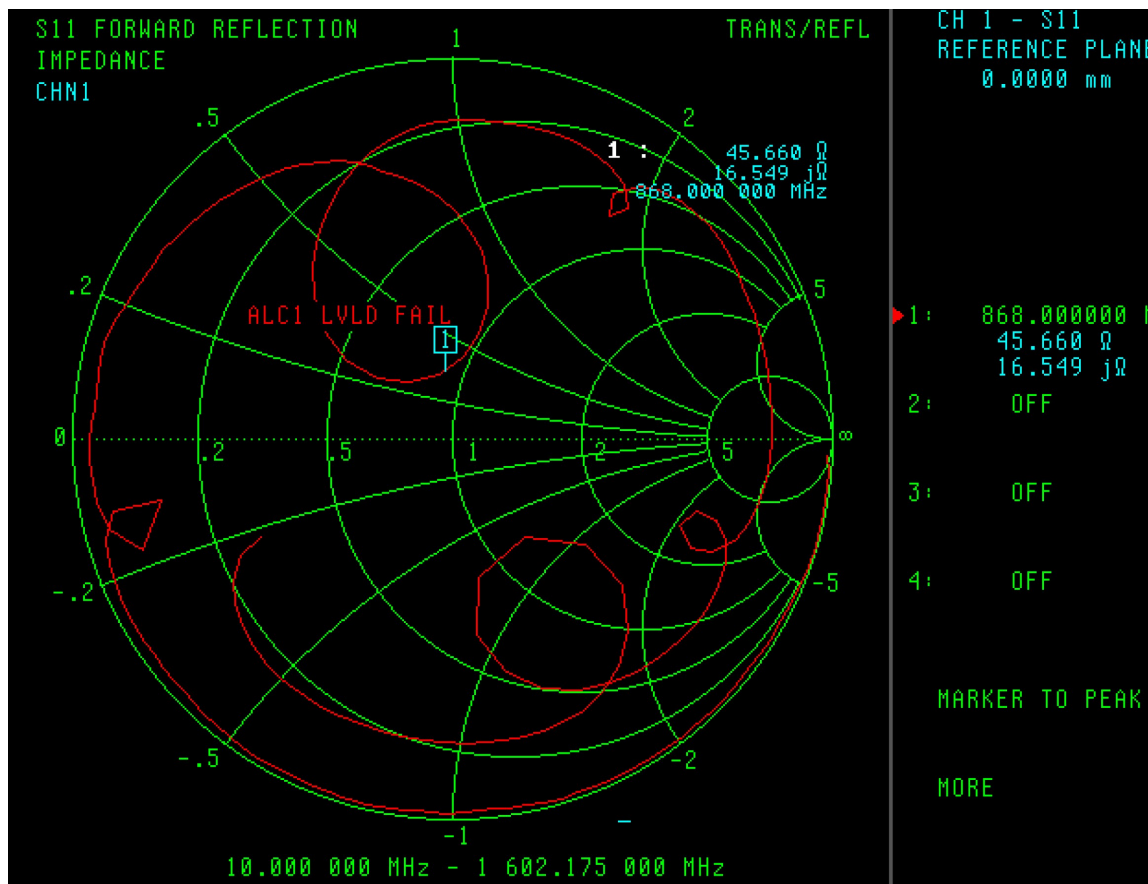

## Performance Data – VSWR

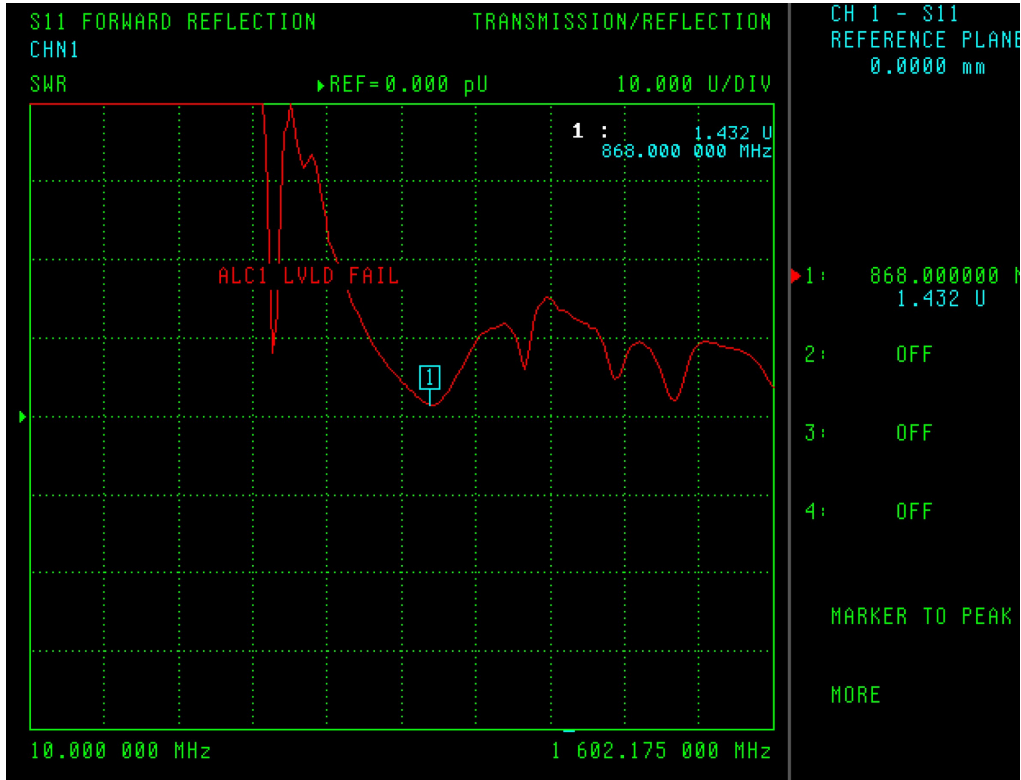

## Performance Data – RETURN LOSS

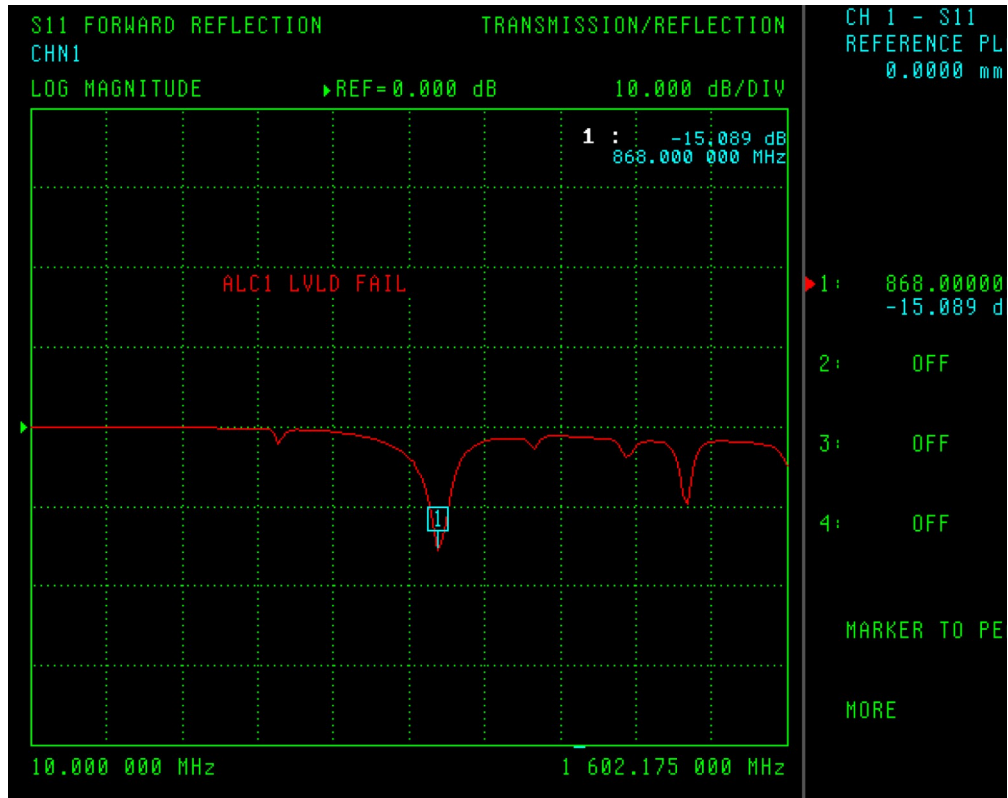

## **RF Solutions Ltd. Recycling Notice**

Meets the following EC Directives:

### **DO NOT**

Discard with normal waste, please recycle.

### **ROHS Directive 2002/95/EC**

Specifies certain limits for hazardous substances.

### **WEEE Directive 2002/96/EC**

Waste electrical & electronic equipment. This product must be disposed of through a licensed WEEE collection point. RF Solutions Ltd., fulfills its WEEE obligations by membership of an approved compliance scheme.

## **Waste Batteries and Accumulators Directive 2006/66/EC**

Where batteries are fitted, before recycling the product, the batteries must be removed and disposed of at a licensed collection point.

Environment Agency producer registration number: WEE/JB0104WV.

#### **Disclaimer:**

Whilst the information in this document is believed to be correct at the time of issue, RF Solutions Ltd does not accept any liability whatsoever for its accuracy, adequacy or completeness. No express or implied warranty or representation is given relating to the information contained in this document. RF Solutions Ltd reserves the right to make changes and improvements to the product(s) described herein without notice. Buyers and other users should determine for themselves the suitability of any such information or products for their own particular requirements or specification(s). RF Solutions Ltd shall not be liable for any loss or damage caused as a result of user's own determination of how to deploy or use RF Solutions Ltd's products. Use of RF Solutions Ltd products or components in life support and/or safety applications is not authorised except with express written approval. No licences are created, implicitly or otherwise, under any of RF Solutions Ltd's intellectual property rights. Liability for loss or damage resulting or caused by reliance on the information contained herein or from the use of the product (including liability resulting from negligence or where RF Solutions Ltd was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict RF Solutions Ltd's liability for death or personal injury resulting from its negligence.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9