

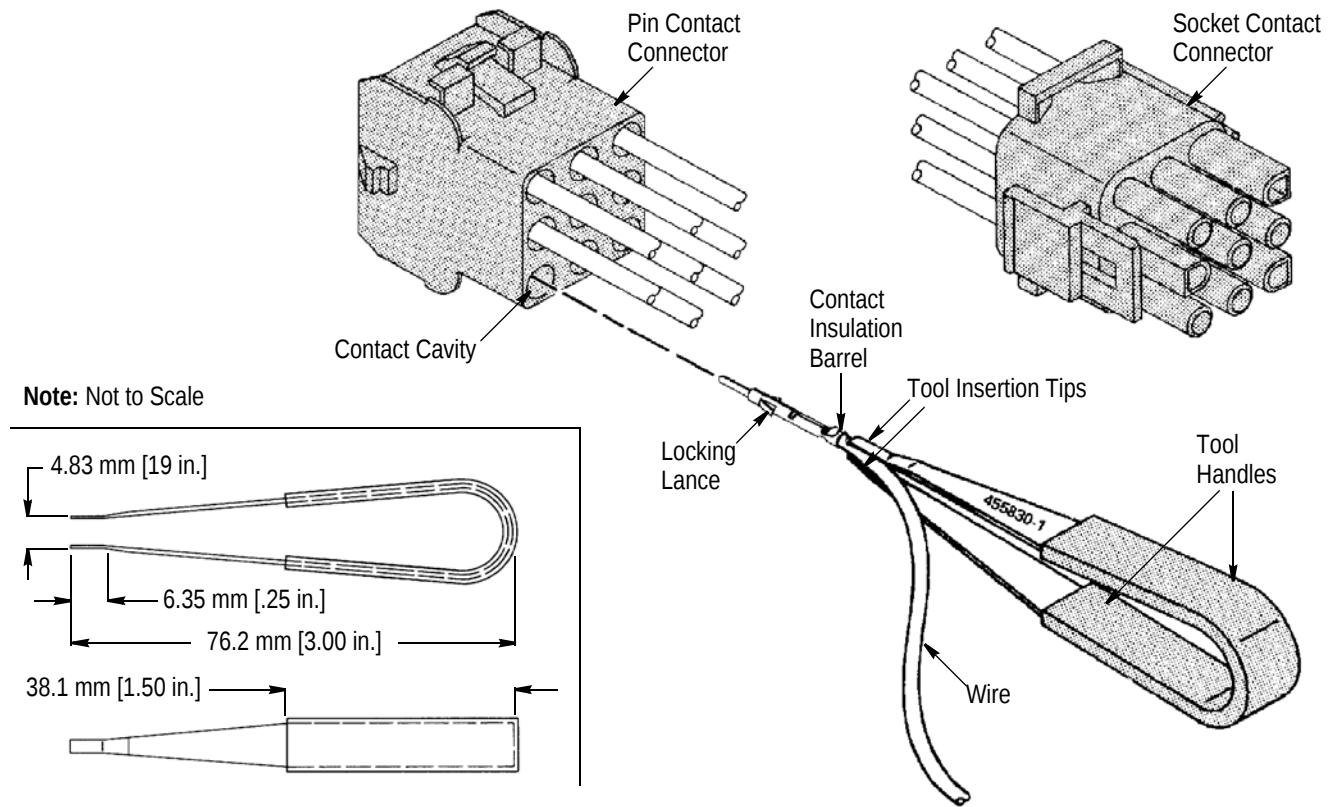


Figure 1

1. INTRODUCTION

Insertion Tool 455830-1 is designed to insert a Universal MATE-N-LOK* pin or socket contact into a connector housing. See Figure 1. Read these instructions thoroughly before using the tool.

NOTE



Dimensions in this instruction sheet are in metric units [with U.S. customary units in brackets]. Figures are not drawn to scale.

Reasons for reissue of this instruction sheet are provided in Section 6, REVISION SUMMARY.

2. DESCRIPTION

This tweezer-shaped insertion tool features two grooved insertion tips for grasping the wire of the contact to be inserted and two tool handles, which assist in applying even pressure to the insertion tips.

3. INSERTION PROCEDURE (See Figure 1)

1. Place the insertion tool over the wire with the insertion tips behind the contact insulation barrel.
2. Insert the contact into the contact cavity of the housing until the locking lance of the contact is fully seated.

3. Remove the insertion tips from the contact cavity, then pull back lightly on the wire of the contact to make sure that the contact is locked in place.

4. TOOL INSPECTION

It is recommended that the insertion tool be inspected immediately upon arrival and at regularly scheduled intervals to ensure that the tool has not been damaged. The insertion tool should be inspected using the dimensions provided in Figure 1.

5. REPLACEMENT

Insertion tools can be purchased from:

CUSTOMER SERVICE (038-035)
TYCO ELECTRONICS CORPORATION
PO BOX 3608
HARRISBURG PA 17105-3608

6. REVISION SUMMARY

Revisions to this instruction sheet include:

- Changed company name and logo
- Changed address in Section 5

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9