


8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
20				20			
© COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.							
PART NUMBER		REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION	
1855335-1		A	122500-1	LEADMAKER	POST FEED	CUTS CARRIER	
1855335-2		A	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER	
1855335-3		A	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER	
1855335-6		A	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER	
7-1855335-7		A	-	-	-	SPARE PARTS	

- △ RECOMMENDED SPARE PARTS
- △ GREASE LIGHTLY
- △ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE
- △ CRIMP DATA SUPPLIED BY TERMINAL MANUFACTURER.

*** WARNING**
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN. REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

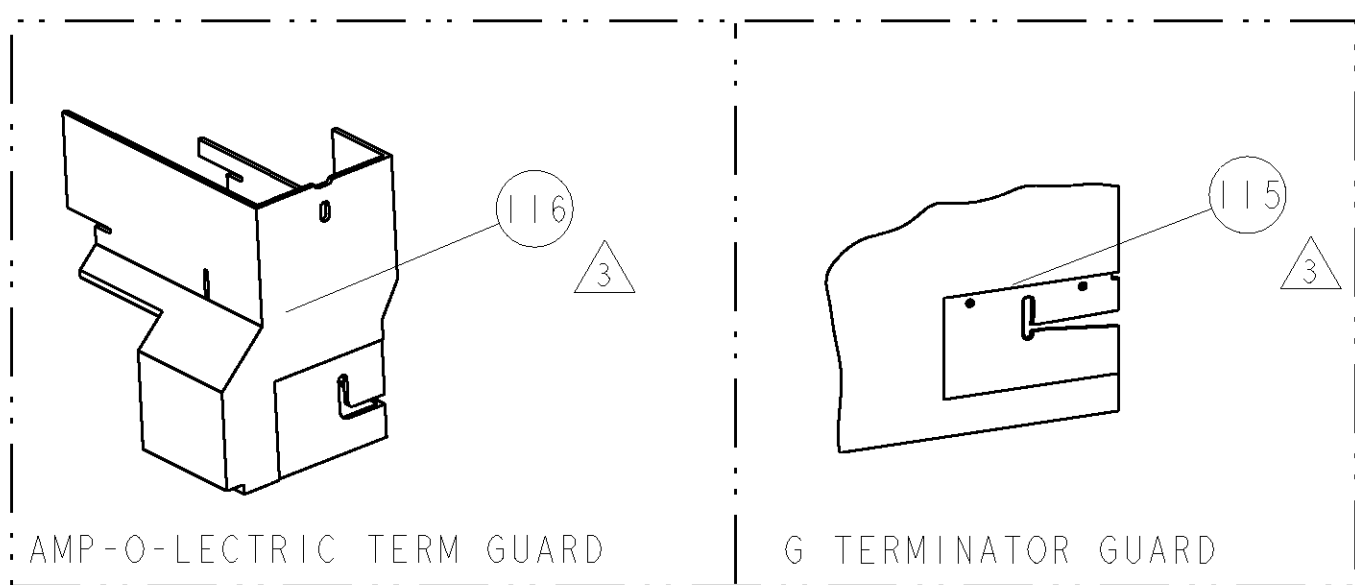

TERMINAL NAME: SICMA-2 HP 1.5X0.8 FEMALE TERMINAL					
TE TERM PN	MANUF PN	FCI TERMINAL - FCI CRIMP SPECS			
1572764-1	211CC2S1243				
-	-	CRIMP HEIGHT		WIRE SIZE	REF SETTING
-	-	1.22±0.05mm[.048±.002]		18AWG or 0.75mm2	C 5
-	-	-		-	-
-	-	-		-	-
-	-	-		-	-
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	2.08mm[.082]	F	0.35-0.75mm
-	-	INSUL	2.54mm[.100]	OV	Ø1.34mm-2.08mm
WIRE STRIP LENGTH 4.67-5.46		TERM APPL SPEC -	FEED 15.32	APPLICATOR INSTRUCTIONS 408-8040	SET UP GAGE 458637-1

LOC		DIST		REVISONS			
A		66		P	LTR	DESCRIPTION	DATE
				A		SEE ECO-07-023399	040CT2007
							LJL
							TE

D


D

C

C

B

B

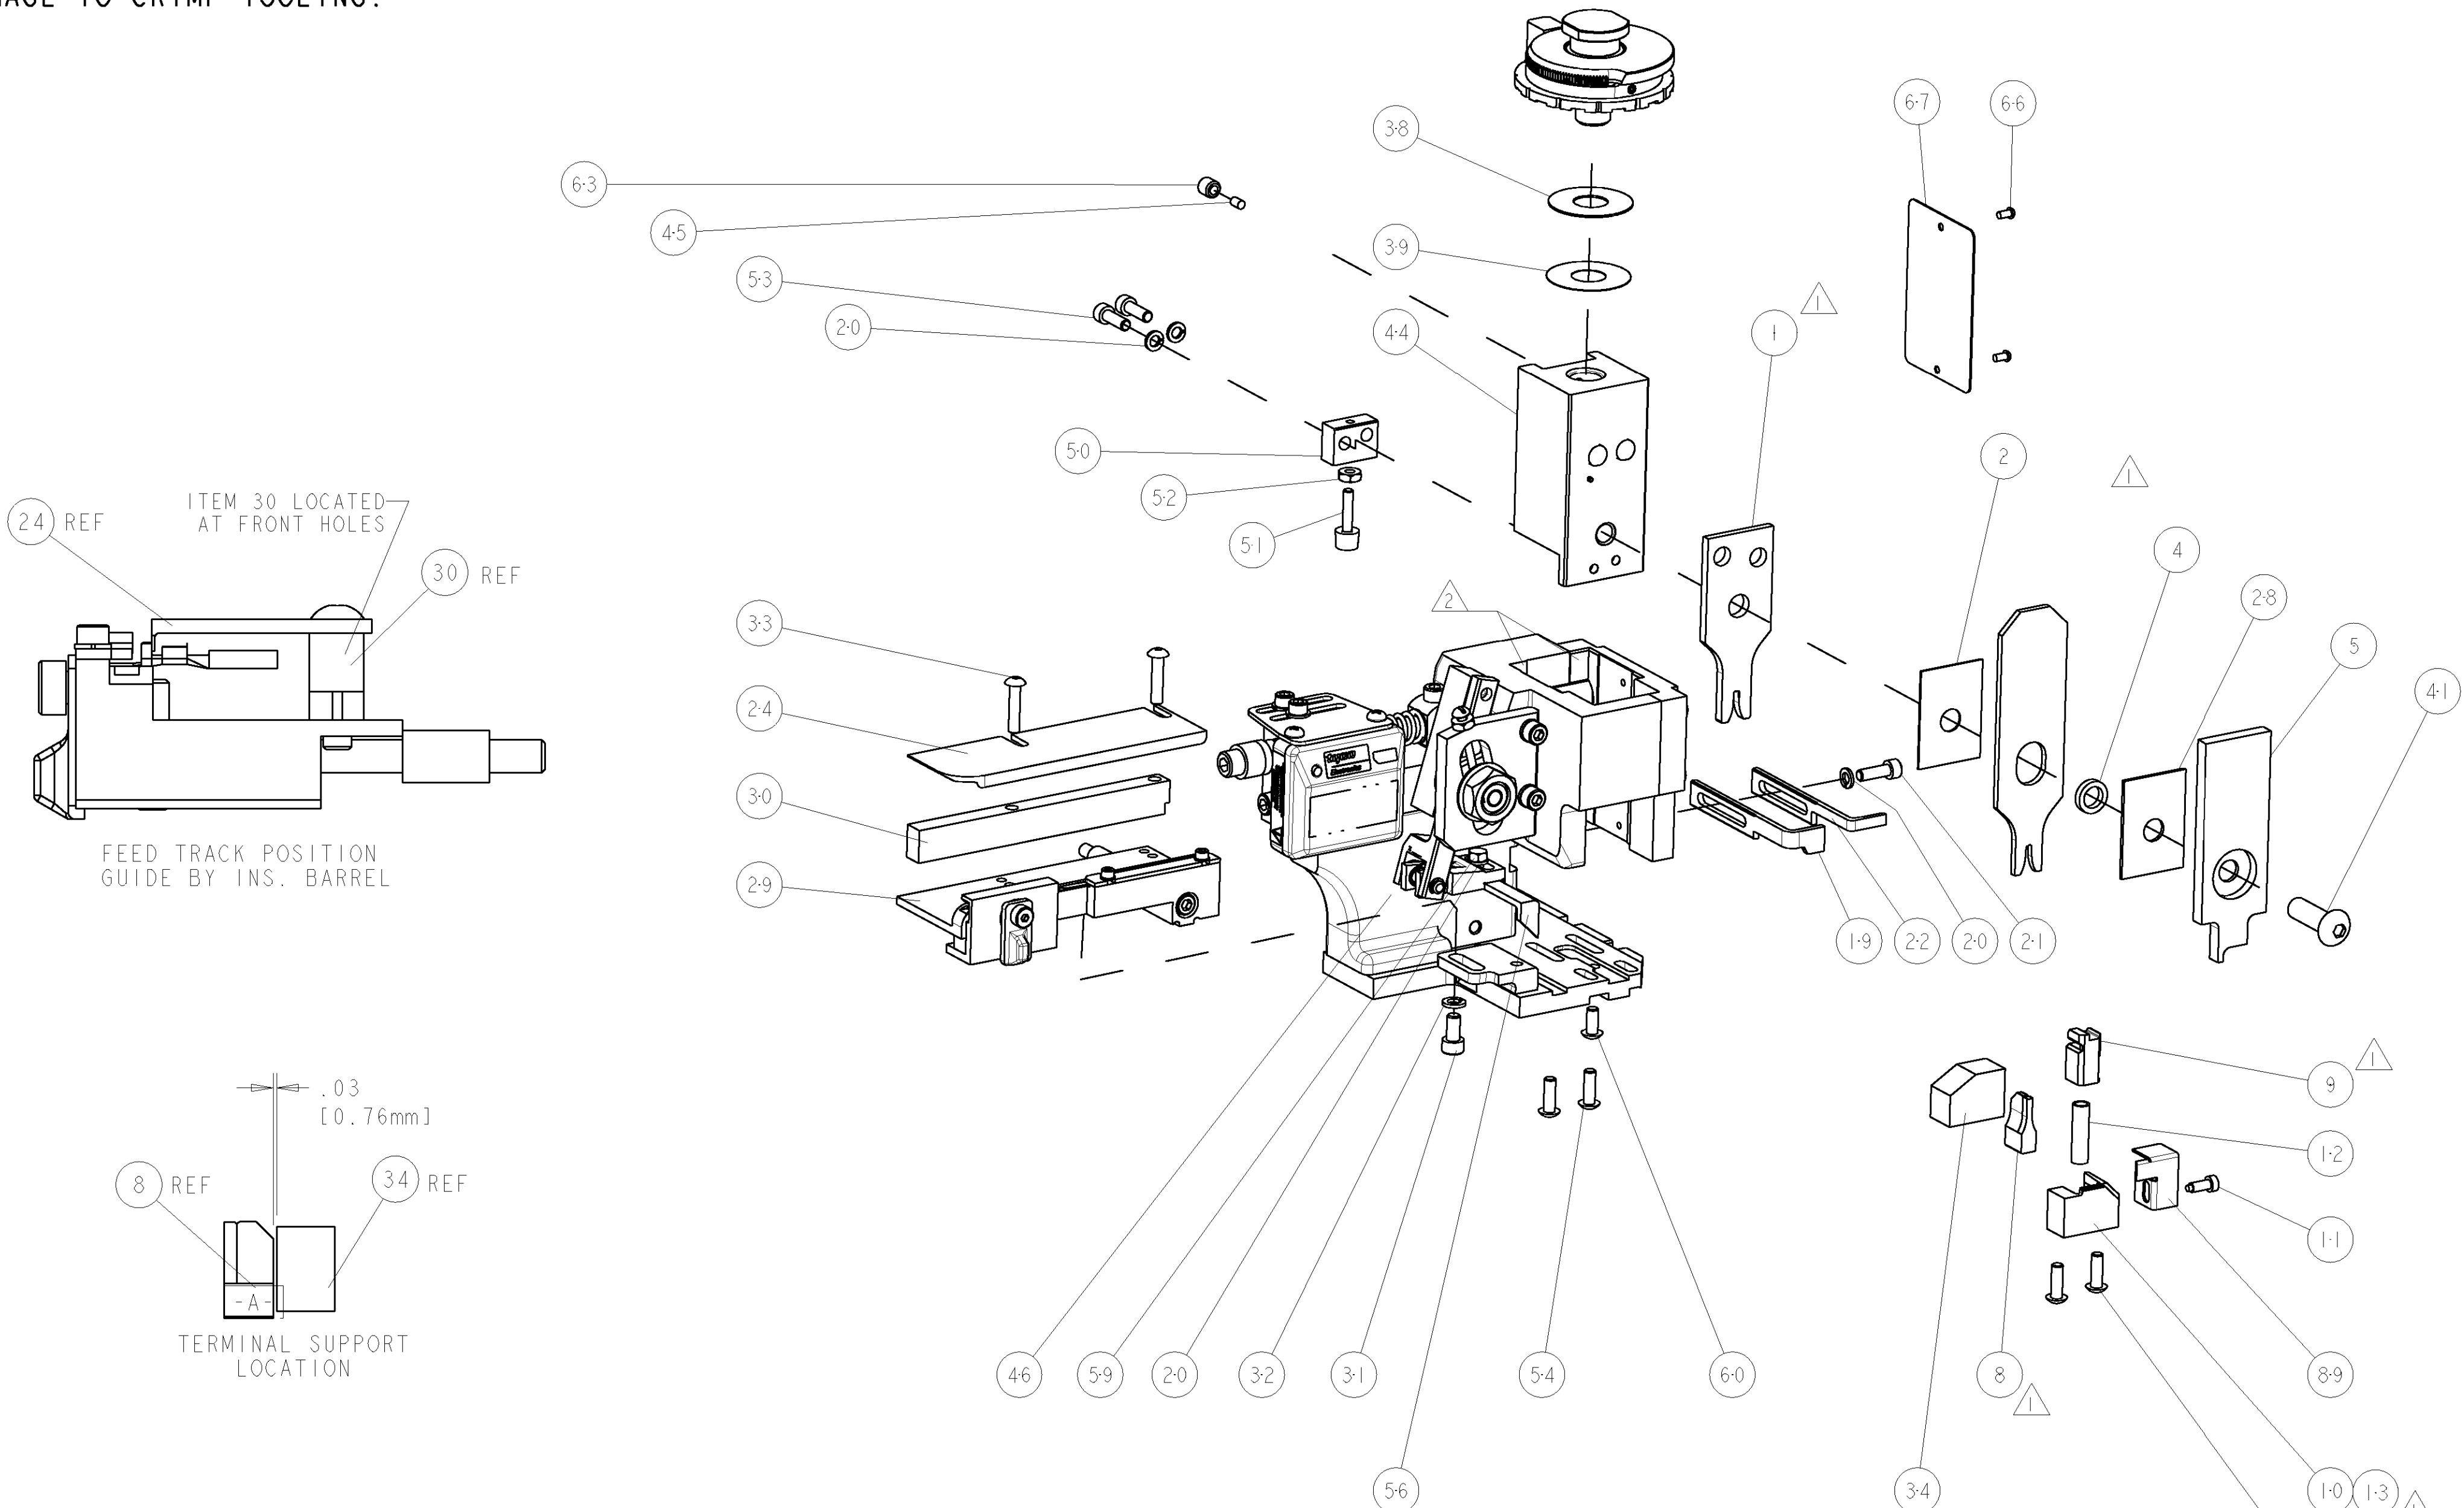

3	-	-	-	REF	-	..	455749-1	GUARD WINDOW	116
3	-	-	REF	-	-	..	679532-1	INSERT, GUARD	115
-	-	-	-	-	-	-	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
-	-	-	-	-	-	-	318563-1	GUARD, FRONT CHIP	89
-	-	-	-	-	-	-	4088040	SF APPL INST 408-8040	72
-	-	-	-	-	-	-	217238-1	GENERAL INSTRUCTION PKG	71
-	-	-	-	-	-	-	461264-5	PLATE, IDENTIFICATION	67
-	-	-	-	-	-	-	21017-2	SCREW, DRIVE	66
-	-	-	-	-	-	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
-	-	-	-	-	-	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
-	-	-	-	-	-	-	2-22603-0	SCR, HEX HD CAP 8-32 X .312	59
-	-	-	-	-	-	-	458537-2	PAWL, FEED	56
-	-	-	-	-	-	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	54
-	-	-	-	-	-	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	53
-	-	-	-	-	-	-	21018-5	NUT, HEX, REG 6-32	52
-	-	-	-	-	-	-	811242-2	BUMPER, HOLD DOWN	51
-	-	-	-	-	-	-	690753-1	SPACER, TONKER	50
-	-	-	-	-	-	..	690602-6	CAM, PRE FEED, 1 5/8	49
-	-	-	-	-	-	..	690602-5	CAM, PRE FEED, 1 1/8	48
-	-	-	-	-	-	-	690501-4	CAM, POST FEED, 1 5/8	47
-	-	-	-	-	-	-	459456-1	APPL. BASIC SUB ASSY (SIDE WISE MQCA)	46
-	-	-	-	-	-	-	690191-1	PLUG,NYLON	45
-	-	-	-	-	-	-	455673-1	RAM, SIDE FEED	44
-	-	-	-	-	-	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
-	-	-	-	-	-	-	690125-1	SHIM SUB-ASSY	39
-	-	-	-	-	-	-	1-469367-2	SHIM	38
-	-	-	-	-	-	-	879103-3	FINE ADJUST HEAD ASSEMBLY	37
-	-	-	-	-	-	-	3-690786-5	TERMINAL SUPPORT	34
-	-	-	-	-	-	-	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	33
-	-	-	-	-	-	-	21024-5	WASHER, SPRG LOCK, REG NO 10	32
-	-	-	-	-	-	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
-	-	-	-	-	-	-	1320908-1	SPACER, STRIP GUIDE	30
-	-	-	-	-	-	-	1633091-1	ASSEMBLY, STRIP GUIDE	29
-	-	-	-	-	-	-	1-455888-0	SPACER, CRIMPER	28
-	-	-	-	-	-	-	1320928-1	PLATE, STRIP GUIDE	24
-	-	-	-	-	-	-	690472-2	STRIPPER	22
-	-	-	-	-	-	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	21
-	-	-	-	-	-	-	21024-4	WASHER, SPRG LOCK, REG NO 8	20
-	-	-	-	-	-	-	691353-1	STRIPPER	19
-	-	-	-	-	-	-	679625-1	SHEAR HOLDER, FRONT (NO CUT)	13
-	-	-	-	-	-	-	3-22280-3	SPRING, COMPRESSION	12
-	-	-	-	-	-	-	690461-1	STOP, SHEAR	11
-	-	-	-	-	-	-	690459-1	SHEAR HOLDER, FRONT	10
-	-	-	-	-	-	-	454276-1	FLOATING SHEAR, FRONT	9
-	-	-	-	-	-	-	1-1633330-3	ANVIL, COMBINATION	8
-	-	-	-	-	-	..	-	-	7
-	-	-	-	-	-	..	-	-	6
-	-	-	-	-	-	-	1-455889-4	DEPRESSOR, SHEAR	5
-	-	-	-	-	-	-	238011-4	BLOCK, CRIMPER SPACER	4
-	-	-	-	-	-	-	1633569-5	CRIMPER, INSULATION OVERLAP	3
-	-	-	-	-	-	-	455888-5	SPACER, CRIMPER	2
-	-	-	-	-	-	-	1-1633305-3	CRIMPER, WIRE PREMIUM	1

-77		-6	-3	-2	-1	U/M	PART NO	DESCRIPTION		ITEM NO
TYCO ELECTRONICS CORPORATION, 1000 WILSON AVENUE, HARRISBURG, PA 17105-3608							DRAWN L. LOFTHOUSE	11SEP2007	Tyco Electronics Harrisburg, PA 17105-3608	
							CHKD T. ELBIN	11SEP2007	NAME FINE ADJUST SIDE FEED HDM APPLICATOR	
							APPROV T. ELBIN	11SEP2007	PRODUCT SPEC -	
							DIMENSIONS: INCHES		APPLICATION SPEC -	
							TOLERANCES UNLESS OTHERWISE SPECIFIED:		SIZE A	
							9 PLC ±.01		CAGE CODE 00779	
							1 PLC ±.01		DRAWING NO C=1855335	
							3 PLC ±.001		SHEET 1	
							4 PLC ±.0001		OF 1	
							ANGLES FINISH		REV A	
							MATERIAL -		CUSTOMER DRAWING	
							WEIGHT -		SCALE 3:5	
							FINISH -		RESTRICTED TO -	

CUSTOMER VIEWABLE ASSEMBLY

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9