






THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - - -
 © COPYRIGHT - By - ALL RIGHTS RESERVED.





LOC	DIST	REVISIONS					
—	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C2	REVISED PER ECO-11-005556	02MAR11	PSK	MW

			Materials
No	Component name	Base material	Plating
1	Housing	Diallyl phthalate resin	
2	End terminal	silver clad copper alloy	gold flash
3	Center terminal	copper alloy	gold flash
4	Rocker contact	silver clad copper alloy	gold flash
5	Actuator tip	Phenol resin, UL94 HB	
6	Actuator spring	music wire	
7	Actuator	Phenol resin, UL94 HB	
8	Actuator guide	polymer	
9	Frame	stainless steel 100-77	
10	Retainer/Stopper	polyamid resin	none
11	Plunger spring	music wire	
12	Plunger pin	brass	
13	Bushing	zinc	nickel
14	Plunger	brass	nickel
15	Mounting nuts (2)	brass	nickel
16	Locating ring	cold rolled steel	nickel
17	Internal tooth lockwasher	steel	nickel

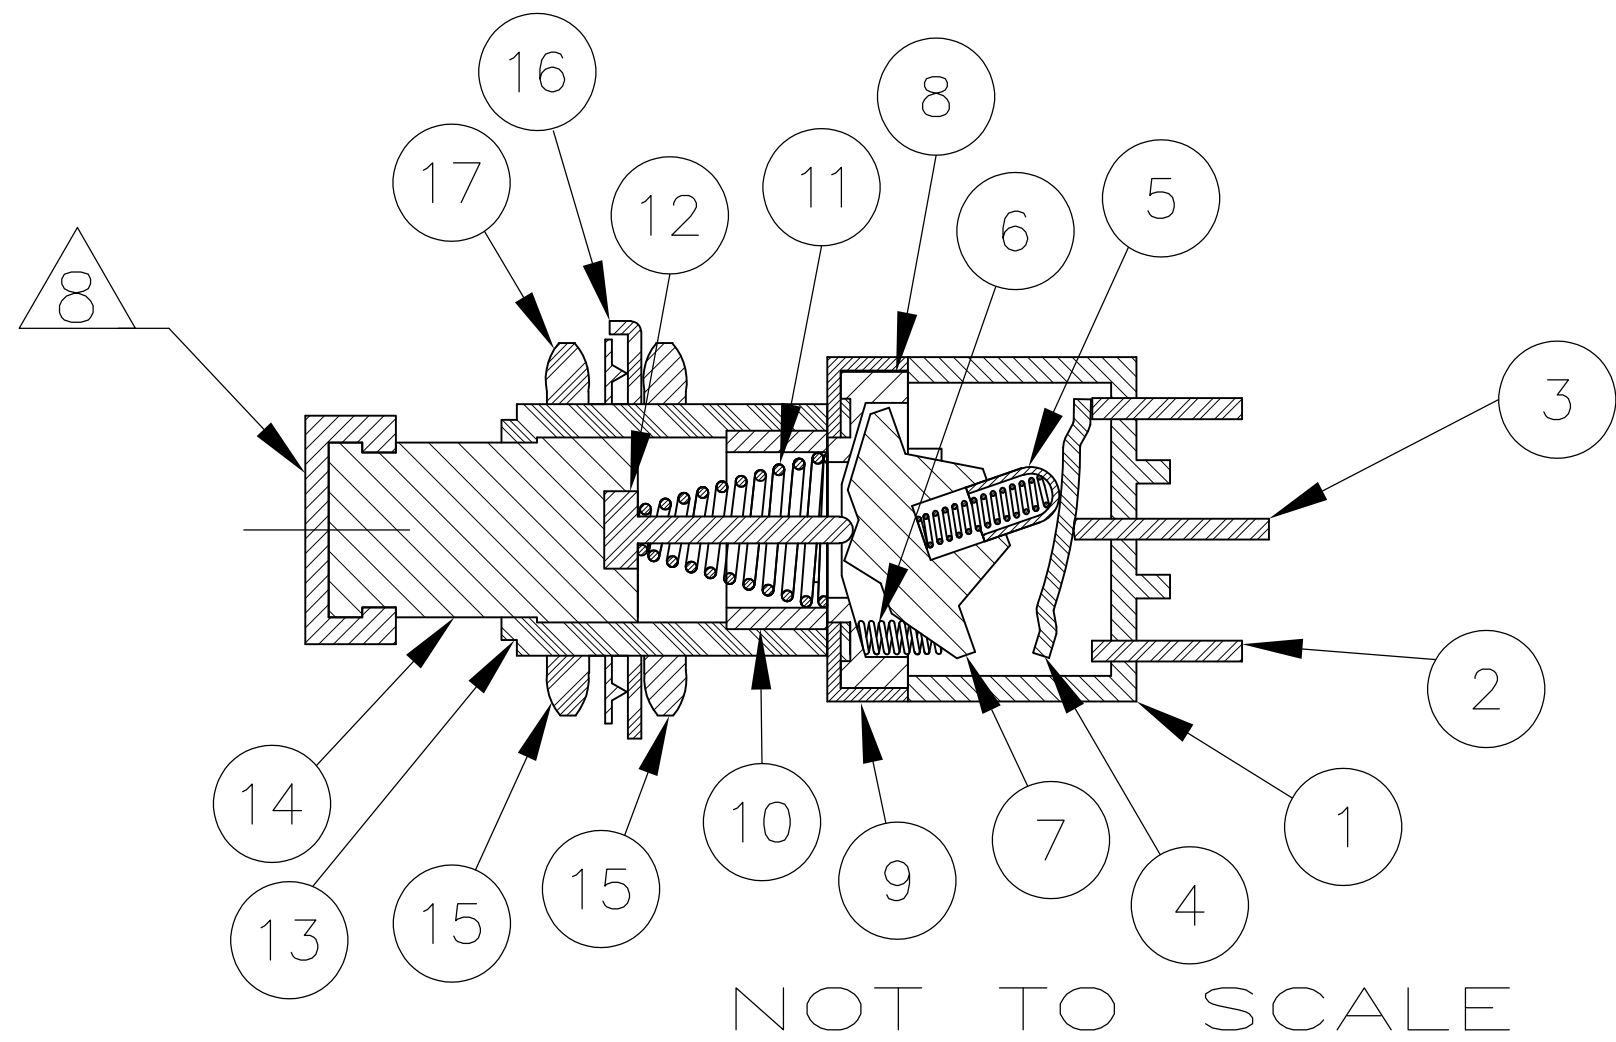

Specifications			
Current rating UL & CSA	6A @ 125 VAC (resistive)		
	3A @ 250 VAC (resistive)		
	4A @ 28 VDC (resistive)		
Initial contact resistance	10 milliohms max @ 2–4 VDC, 1A		
Dielectric strength	1,000 megohms min.		
Withstanding voltage	1,500 VAC		
Travel	.140		
Actuation force	.4 to 2 kgf		
Operating temperature	–20C to +85C		
Storage temperature	–40C to +85C		
Contact timing	break before make		
Terminal seal	over molded		
Durability	Parameter	Push on/ Push off	Momentary
	250 VAC (3A resistive)	30,000	30,000
	125 VAC (6A resistive)	30,000	30,000
	28 VDC (4A resistive)	30,000	30,000

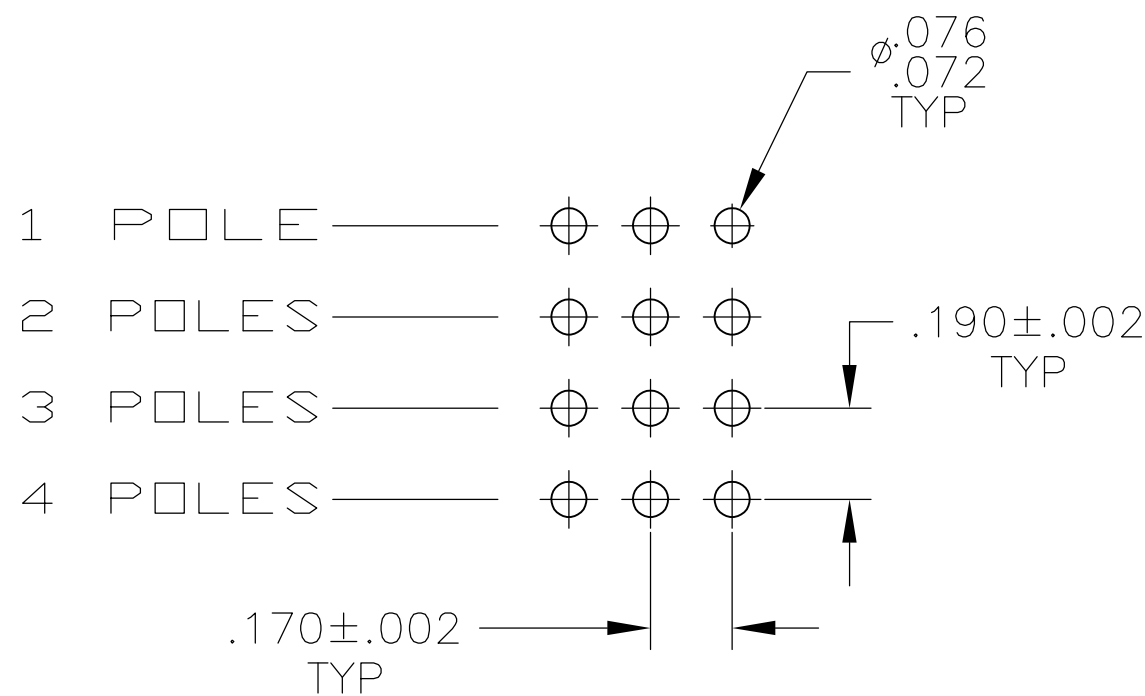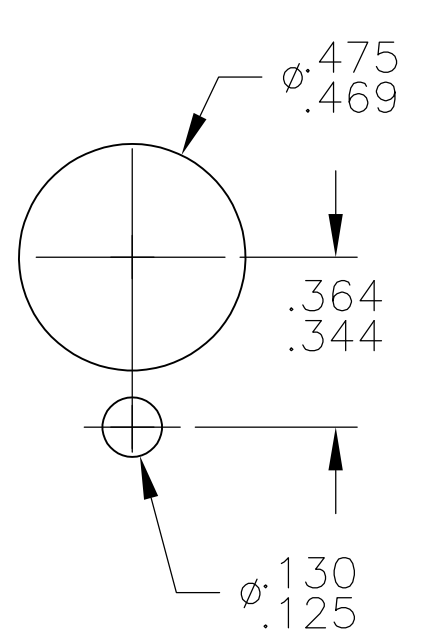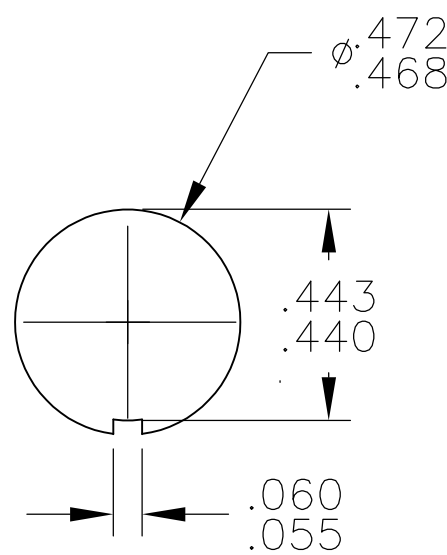

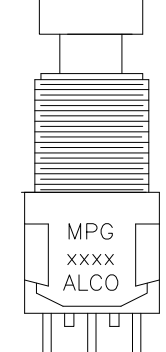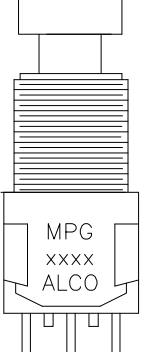PART NUMBER	Alco P/N	Mark SWITCH 	Poles	Throws	Terminal	Function		Connected Terminals	
									
5-1437567-8	MPG406R	MPG 406R	4	2	Wire lug	ON	MOM	2-1, 5-4, 8-7, 11-10	2-3, 5-6, 8-9, 11-12
5-1437567-7	MPG406N	MPG 406N	4	2	Wire lug	ON	ON	2-1, 5-4, 8-7, 11-10	2-3, 5-6, 8-9, 11-12
5-1437567-6	MPG306F	MPG 306F	3	2	Wire lug	ON	MOM	2-1, 5-4, 8-7	2-3, 5-6, 8-9
5-1437567-5	MPG306D	MPG 306D	3	2	Wire lug	ON	ON	2-1, 5-4, 8-7	2-3, 5-6, 8-9
5-1437567-4	MPG206RPC	MPG 206RPC	2	2	PC	ON	MOM	2-1, 5-4	2-3, 5-6
5-1437567-3	MPG206R	MPG 206R	2	2	Wire lug	ON	MOM	2-1, 5-4	2-3, 5-6
5-1437567-2	MPG206NPC	MPG 206NPC	2	2	PC	ON	ON	2-1, 5-4	2-3, 5-6
5-1437567-1	MPG206N	MPG 206N	2	2	Wire lug	ON	ON	2-1, 5-4	2-3, 5-6
5-1437567-0	MPG106F	MPG 106F	1	2	Wire lug	ON	MOM	2-1	2-3
4-1437567-9	MPG106D	MPG 106D	1	2	Wire lug	ON	ON	2-1	2-3

NOTES:
1. TERMINAL NUMBERS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON THE SWITCHES.


2. EACH SWITCH SUPPLIED WITH THE FOLLOWING MOUNTING HARDWARE:

- (2) 15/32-32 UNS-2B HEX NUTS
- (1) INTERNAL TOOTH LOCKWASHER
- (1) LOCATING RING





7. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS).




THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN M.BINNER	02MAR09	 TE Connectivity	
DIMENSIONS: INCHES		CHK M.ZITTO	15NOV04		
TOLERANCES UNLESS OTHERWISE SPECIFIED: M.ZITTO		APPRO M.ZITTO	15NOV04	NAME ALCOSWITCH GREEN SERIES PUSHBUTTON SWITCH, MPG SERIES	
		PRODUCT SPEC	SIZE A1		
0 PLG ± 2 PLG ± 2 PLG ±.012 4 PLG ± ANGLES ± ± FINISH		APPLICATION SPEC	CAGE CODE C4-1437567-9	DRAWING NO —	RESTRICTED TO —
MATERIAL —		WEIGHT —	CUSTOMER DRAWING		
			SCALE 3:1	SHEET 1 of 3	REV C


LOC	DIST	REVISIONS				
		REV	LTR	DESCRIPTION	DATE	APP'D
—	—	—	—	SEE SHEET 1	—	—

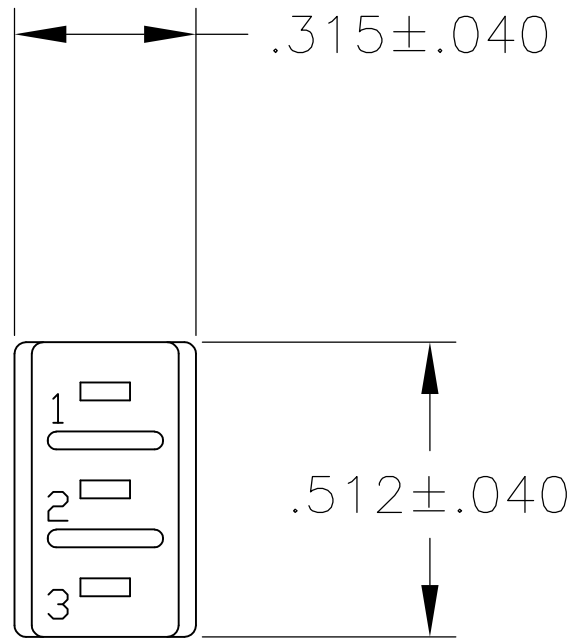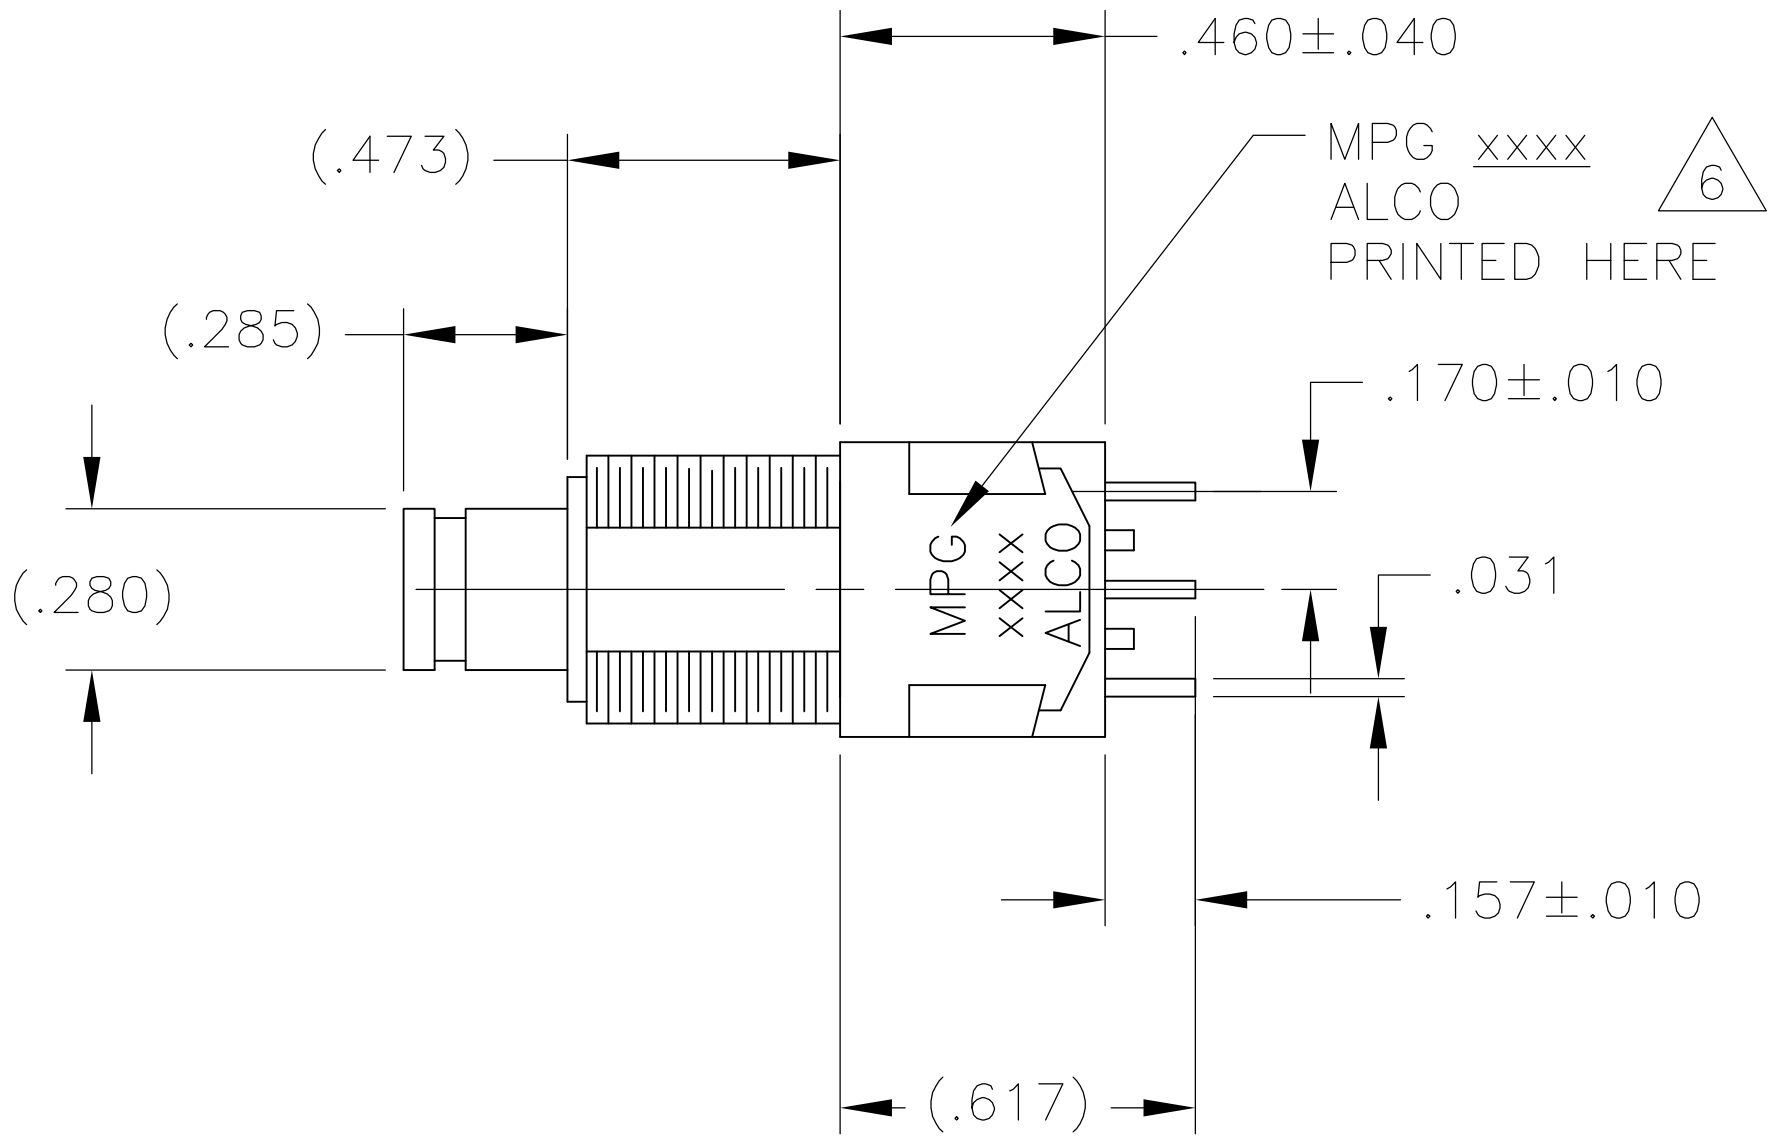


MPG-106

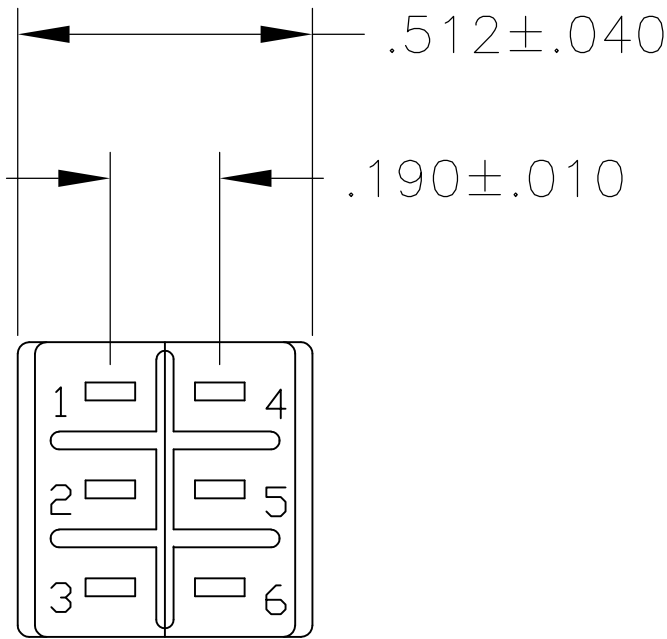


MPG-206

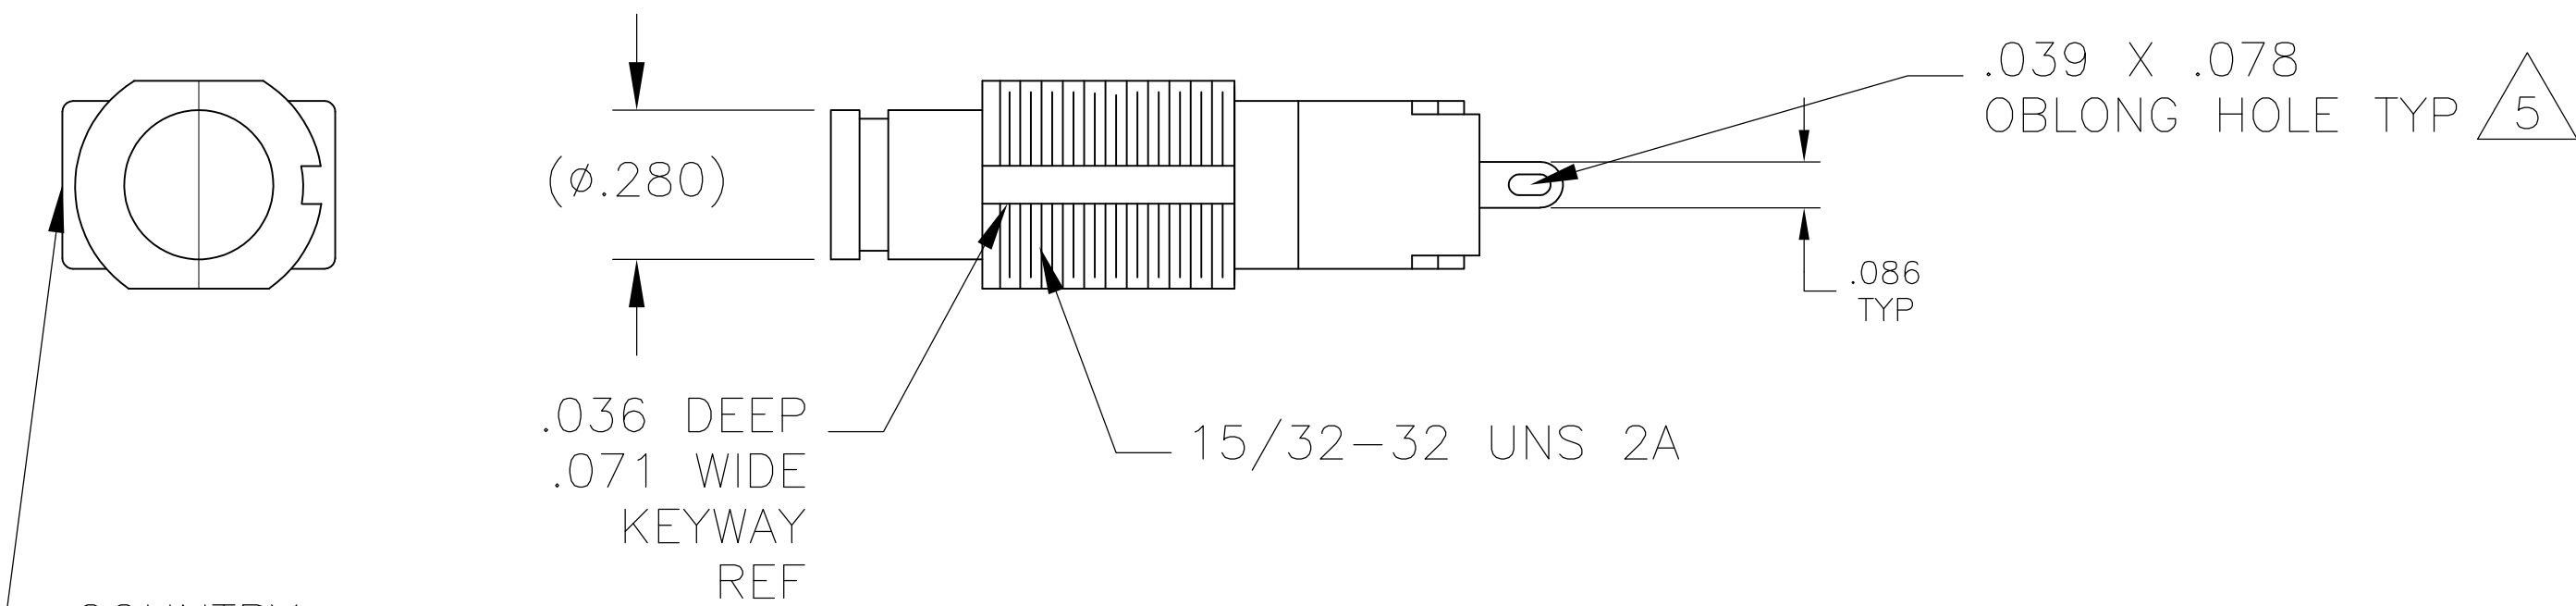

WIRE LUG TERMINAL

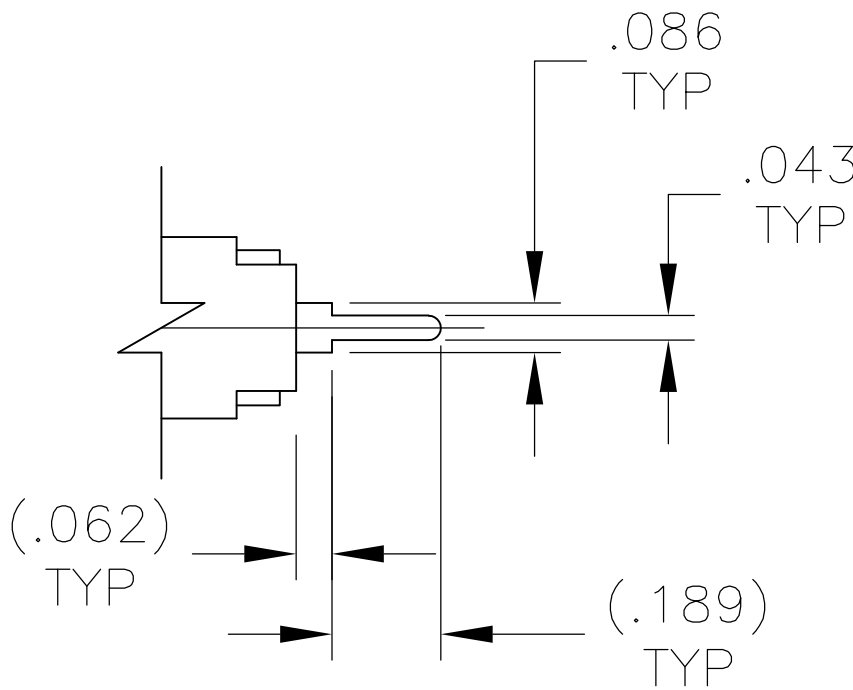





PC TERMINAL

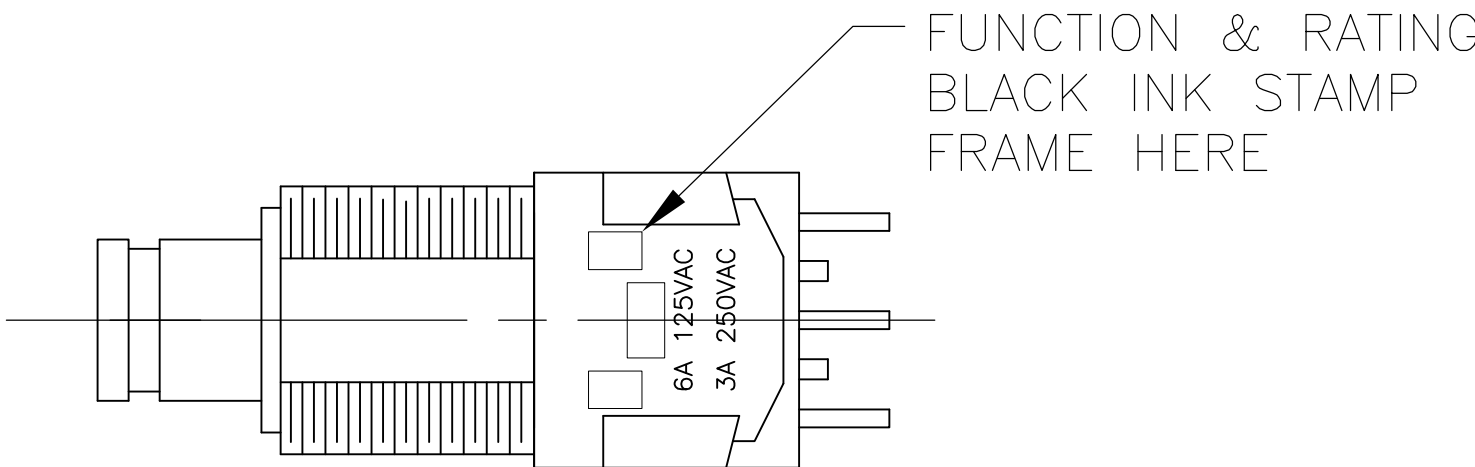


COUNTRY
OF ORGIN
STAMPED HERE
EITHER SIDE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. BINNER	02MAR09	TE Connectivity	
DIMENSIONS: INCHES		CHK M. ZITTO	15NOV04		
	0. PLC	±	—	NAME ALCOSWITCH GREEN SERIES PUSHBUTTON SWITCH, MPG SERIES	
	1. PLC	±	—		
	2. PLC	±	—		
	3. PLC	±	.012		
MATERIAL	4. PLC	±	—	SIZE A1	
	ANGLES	±	—		
FINISH		WEIGHT		CAGE CODE 4-1437567-9	
—		—		DRAWING NO 4-1437567-9	
—		CUSTOMER DRAWING		RESTRICTED TO —	
—		SCALE 3:1		SHEET 2 OF 3	
—		—		REV C2	


LOC		DIST		REVISIONS			
P	T	L	TR	DESCRIPTION	DATE	DWN	APVD
—	—	—	—	SEE SHEET 1	—	—	—

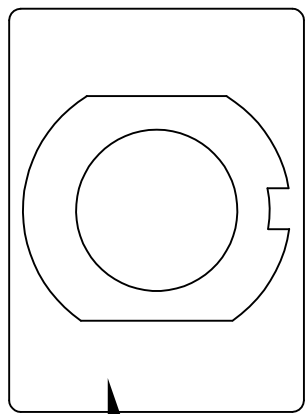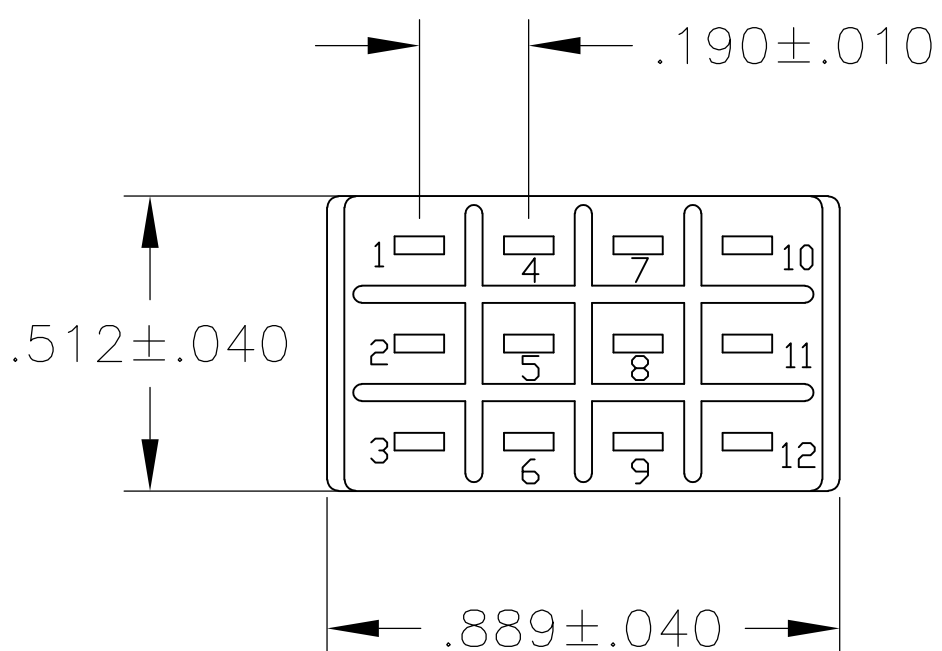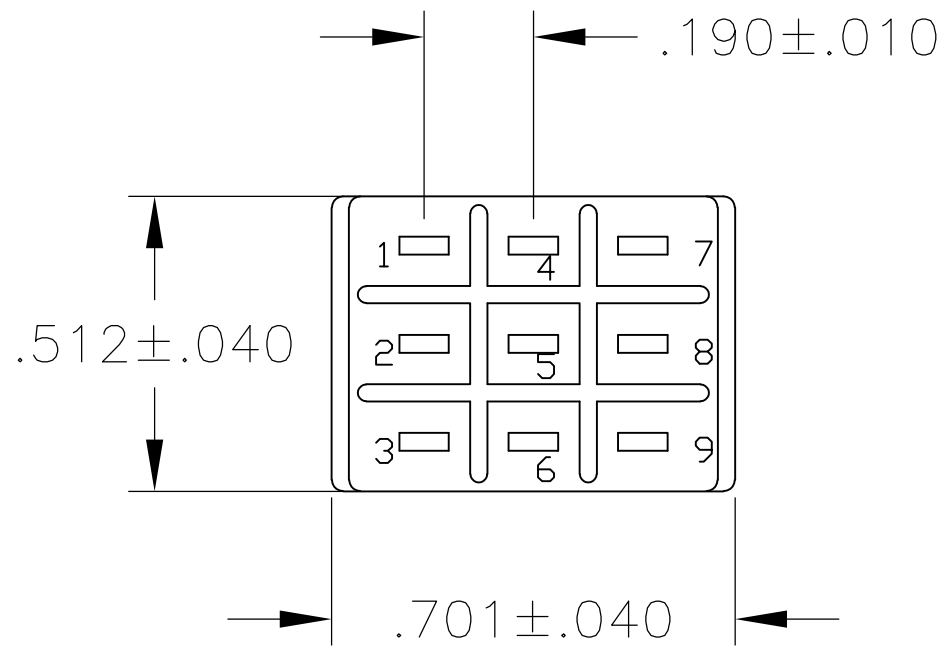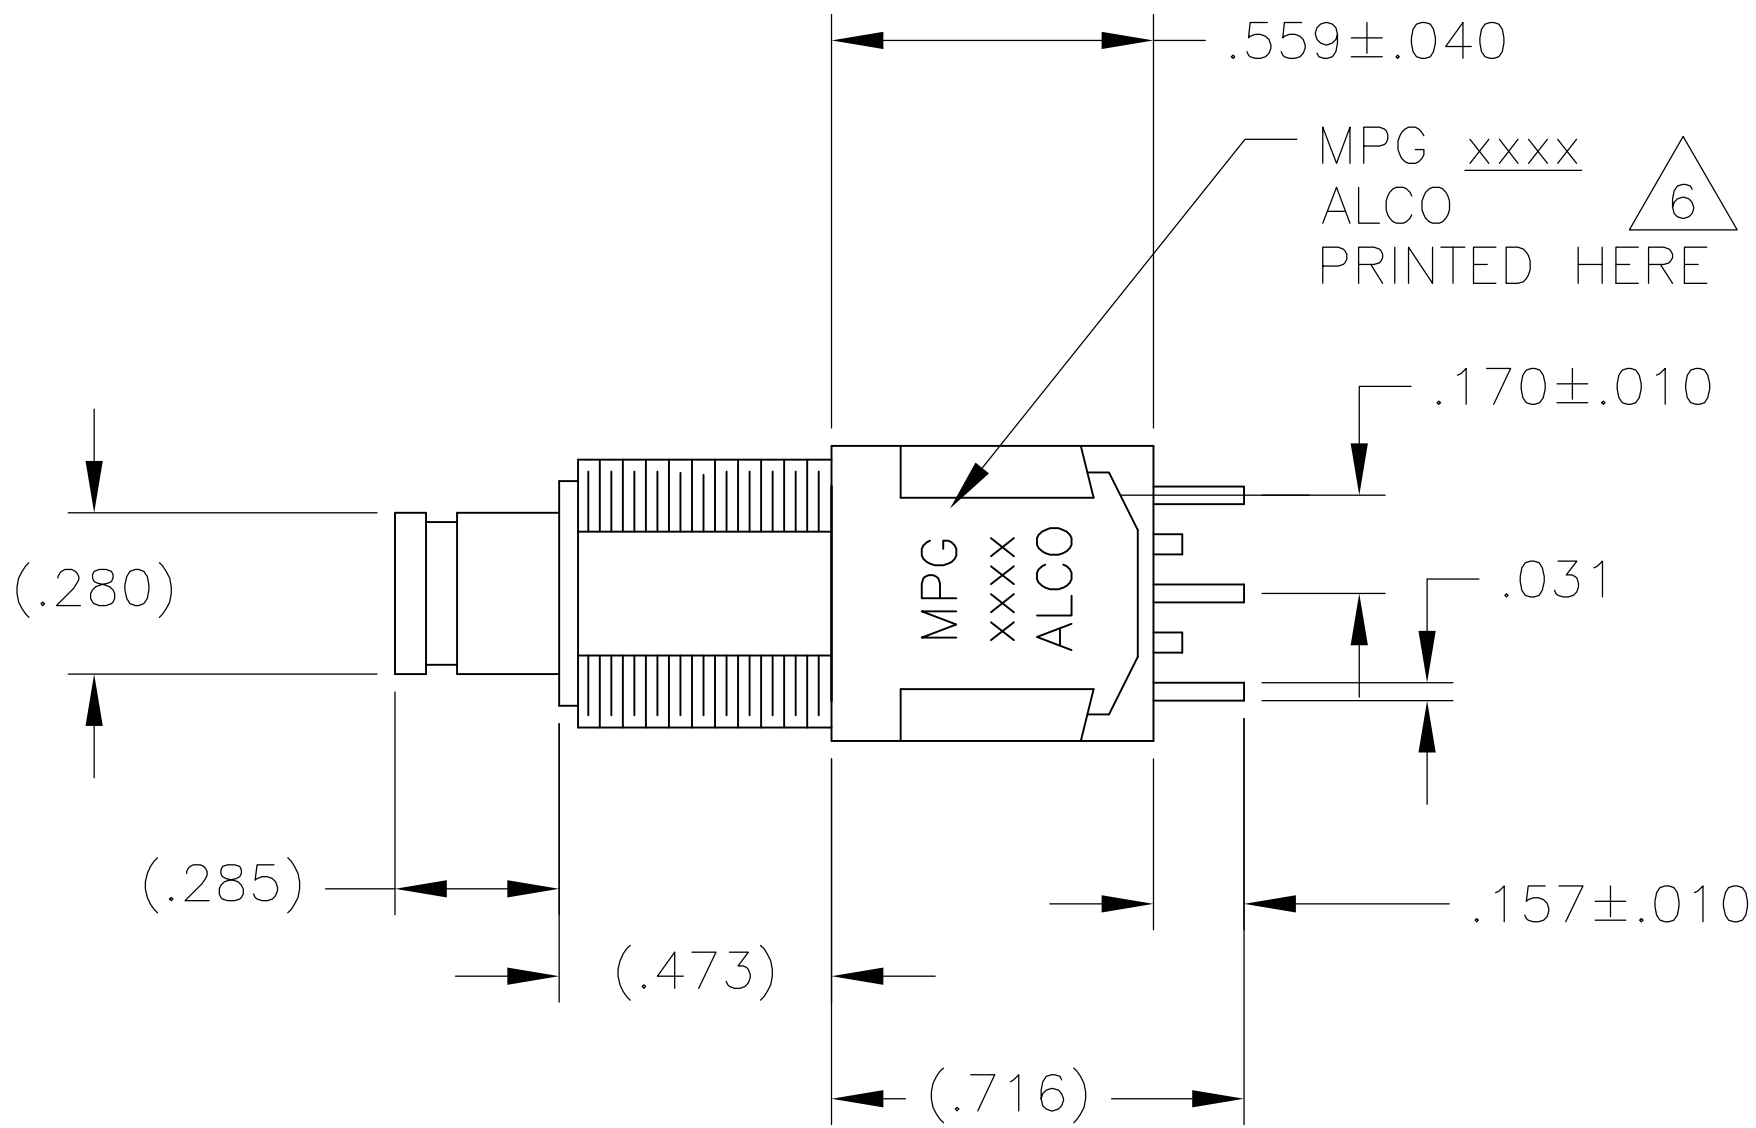


COUNTRY
OF ORGIN
STAMPED HERE
EITHER SIDE

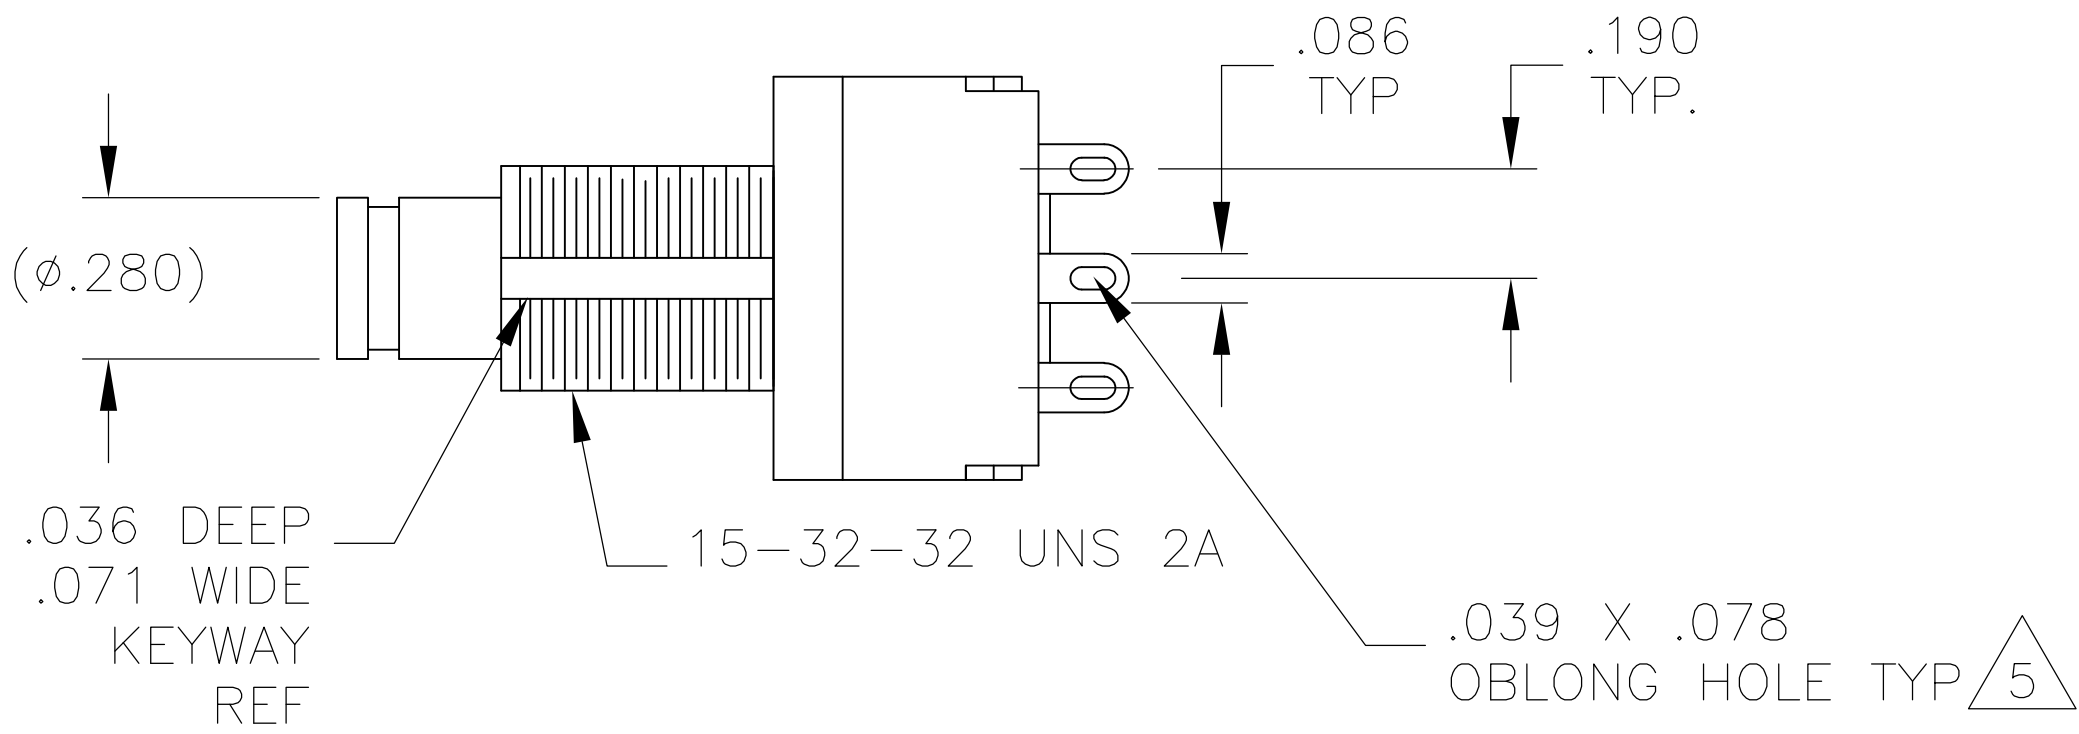


WIRE LUG TERMINAL

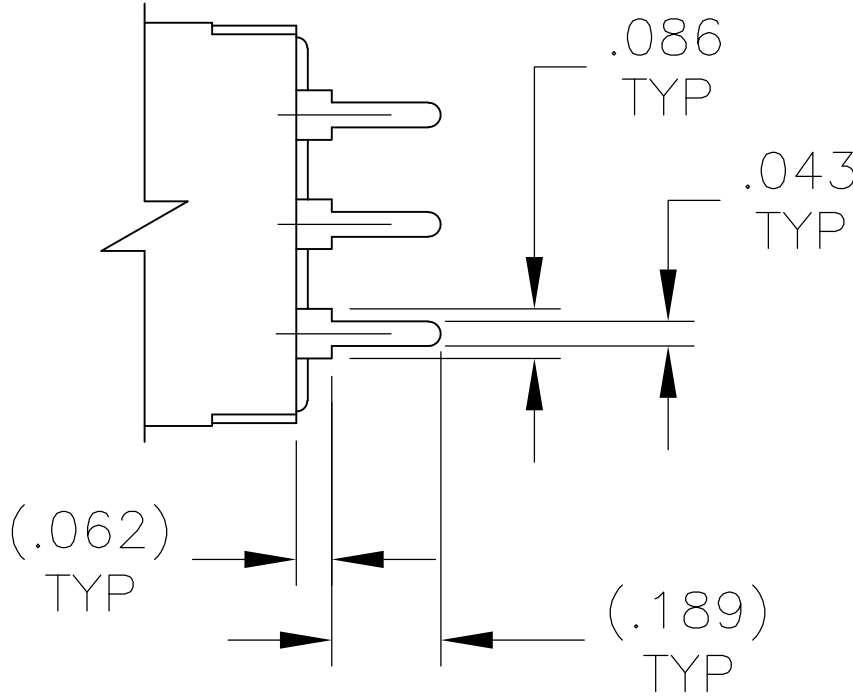

PC TERMINAL

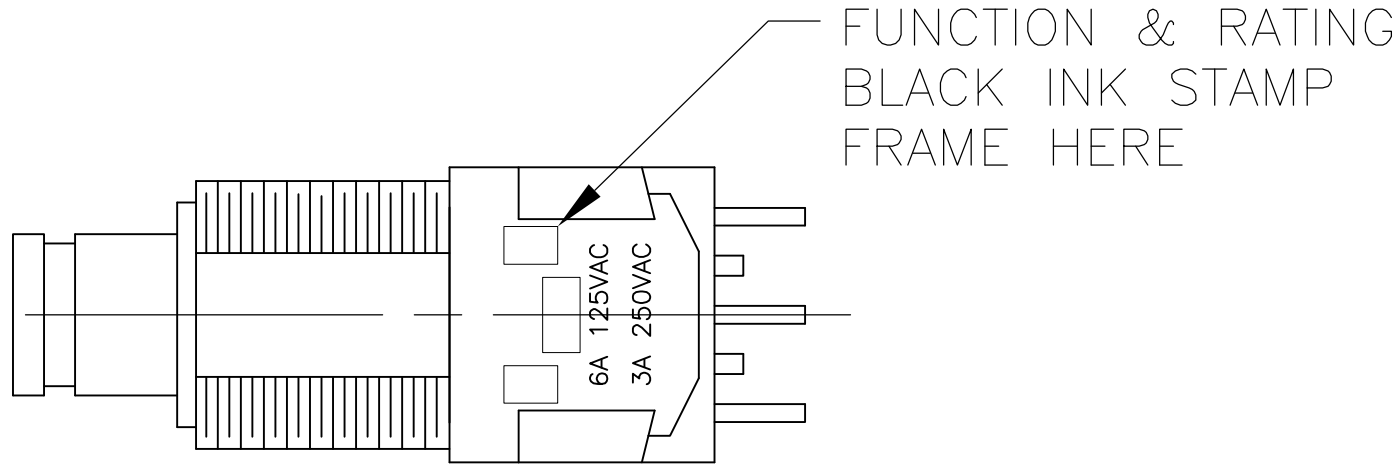

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.BINNER	02MAR09	 TE Connectivity		
		CHK M.ZITTO	15NOV04			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME ALCOSWITCH GREEN SERIES PUSHBUTTON SWITCH, MPG SERIES	SIZE A1	
	0 PLC	±	—			
	1 PLC	±	—			
	2 PLC	±	—			
	3 PLC	±	.012			
	4 PLC	±	—	APPLICATION SPEC	CAGE CODE 4-1437567-9	
	5 PLC	±	—			
	6 PLC	±	—			
	7 PLC	±	—			
MATERIAL —		FINISH —		WEIGHT —		
		CUSTOMER DRAWING		SCALE 3:1		
				SHEET 3 OF 3		
				REV C2		

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9