


PRODUCT NUMBER

88902-XXX

88902-XXYLF

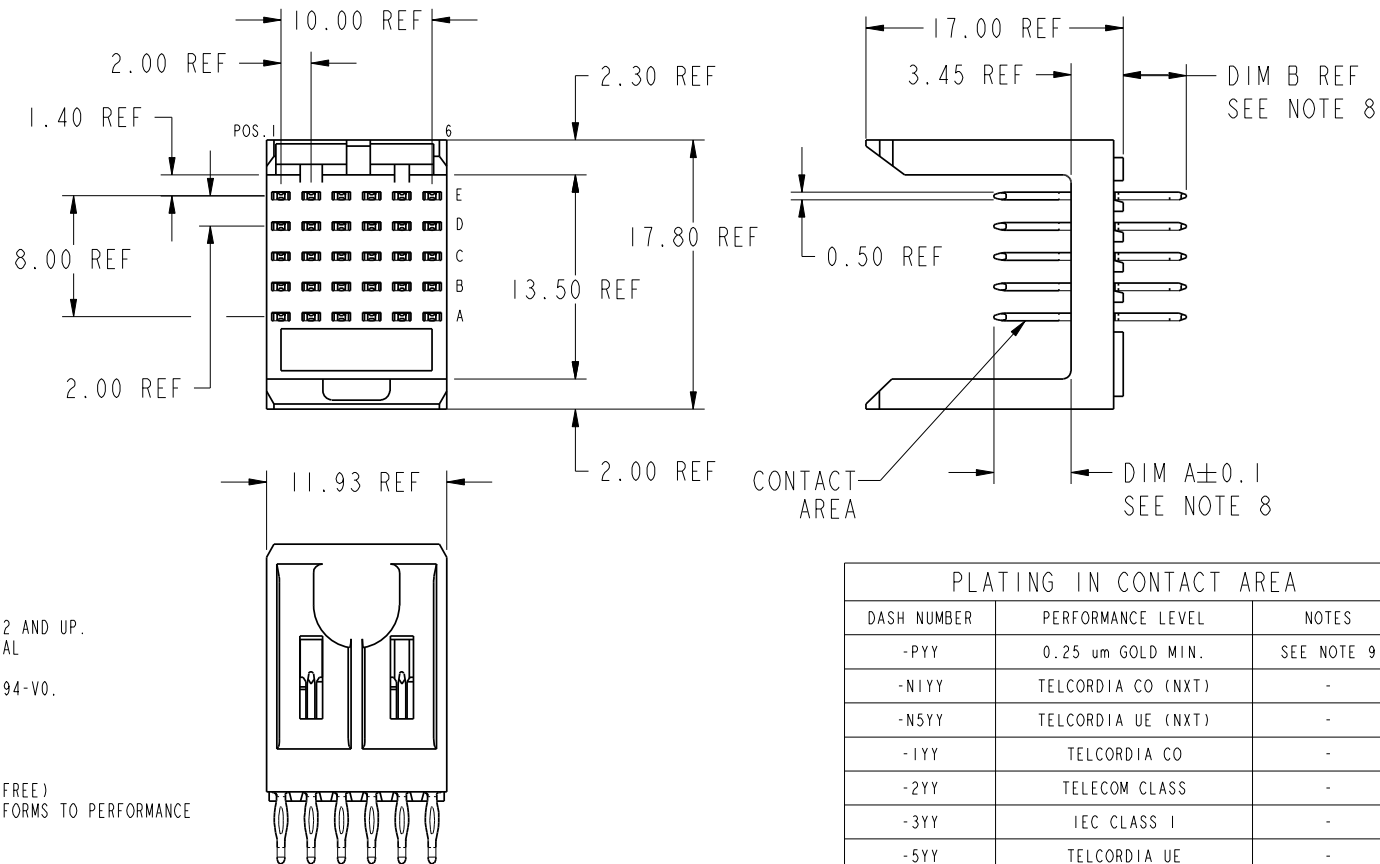

NOTES:

1. FOR DIM A, AND B SEE SHEET 2 AND UP.
2. BODY MATERIAL: LIQUID CRYSTAL POLYMER 30 % GLASS. FLAME RETARDANT ACC. UL 94-V0.
3. PIN MATERIAL: PHOSPHOR BRONZE
4. PLATING ON PRESS-FIT TAIL:
88902-XXX IS SnPb
88902-XXYLF IS Sn (LEAD FREE)
PLATING ON CONTACT AREA CONFORMS TO PERFORMANCE LEVEL SHOWN IN TABLE BELOW.
5. PRODUCT MARKING:
PART NUMBER DESIGNATION J & BATCH I.D.
6. ALL PRODUCTS WITH PART NUMBERS SHOWN IN SUBSEQUENT TABLES WILL BE PACKAGED IN TUBES. IF TRAY PACKAGING IS REQUIRED, SUFFIX "P" WILL BE ADDED TO THE END OF THE PART NUMBER. EXAMPLE: XXXXX-XXXP OR XXXXX-XXXPPLF
7. PRODUCT SPECIFICATION: GS-12-180
APPLICATION SPECIFICATION: BUS-20-073
8. AFTER INSERTION INTO CIRCUIT BOARD WITH QUALIFIED TOOL.
9. -Ayy PLATING HAS Au FLASH IN PRESS-FIT AREA (LEAD FREE)
10. THE PRODUCTS WHERE THE PART NUMBER ENDS IN 'LF' MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
11. FOR LEAD FREE PART NUMBERS, ADD AN 'LF' SUFFIX. EXAMPLE: 88902-X01LF.
12. ALL PRODUCTS EXCEPT THOSE WITH PART NUMBERS CONTAINING (DRAWING NO.)-N1--- OR (DRAWING NO.)-N5--- WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. PART NUMBERS (DRAWING NO.)-N1--- AND (DRAWING NO.)-N5--- WILL NOT WITHSTAND REFLOW AND Au CONTACT SURFACES OF THE CONTACTS SHALL BE EXPOSED TO A MAXIMUM OF 140°C FOR NO LONGER THAN 15 SECONDS IN A WAVE SOLDER APPLICATION.

PLATING IN CONTACT AREA

DASH NUMBER	PERFORMANCE LEVEL	NOTES
-PYY	0.25 um GOLD MIN.	SEE NOTE 9
-NIYY	TELCORDIA CO (NXT)	-
-N5YY	TELCORDIA UE (NXT)	-
-1YY	TELCORDIA CO	-
-2YY	TELECOM CLASS	-
-3YY	IEC CLASS I	-
-5YY	TELCORDIA UE	-
-NIYYLF	TELCORDIA CO (NXT) IEC CLASS I	SEE NOTE 10
-N5YYLF	TELCORDIA UE (NXT)	SEE NOTE 10
-1YYLF	TELCORDIA CO IEC CLASS I	SEE NOTE 10
-2YYLF	TELECOM CLASS	SEE NOTE 10
-5YYLF	TELCORDIA UE	SEE NOTE 10

mot'l code				SEE NOTES		tolerances unless otherwise specified		CUSTOMER		FCI	
lir	ecn no.	dr	date	linear	angles	dr	engr	chr	appd	copy	projection
X	DG09-0256	TER	2009-08-19	0.X ± 0.3	0° ± 2°	T.BRUNGARD	11/19/99	M.STRAWSE	11/19/99	projection	title
Y	DG09-0306	TER	2009-09-14	0.XX ± 0.13	0° ± 2°	M.STRAWSE	11/19/99	M.STRAWSE	11/19/99	projection	title
AA	DG09-0366	TER	2009-11-24	.XXX ± 0.051	0° ± 2°	M.STRAWSE	11/19/99	M.STRAWSE	11/19/99	projection	title
AB	DG10-0165	TER	2010-05-05	0° ± 2°	0° ± 2°	M.STRAWSE	11/19/99	M.STRAWSE	11/19/99	projection	title
AC	DG10-0243	TER	2010-06-28	0° ± 2°	0° ± 2°	M.STRAWSE	11/19/99	M.STRAWSE	11/19/99	projection	title
W	DG09-0169	TER	2009-05-25	0° ± 2°	0° ± 2°	M.STRAWSE	02/29/00	M.STRAWSE	02/29/00	projection	title
sheet index	revision sheet	AC	AC	AC	AC	AC	AC	AC	AC	AC	AC
1	2	3	4								

COPY

projection

MM

scale

2:1



www.fciconnect.com

METRAL SIGNAL HEADER
1 MOD, 5 ROW PRESS-FIT

product family METRAL

size dwg no

A 88902

sheet 1 of 4

code code

22506

STATUS Released


Printed: Jul 01, 2010



1 | 2

3 |

4

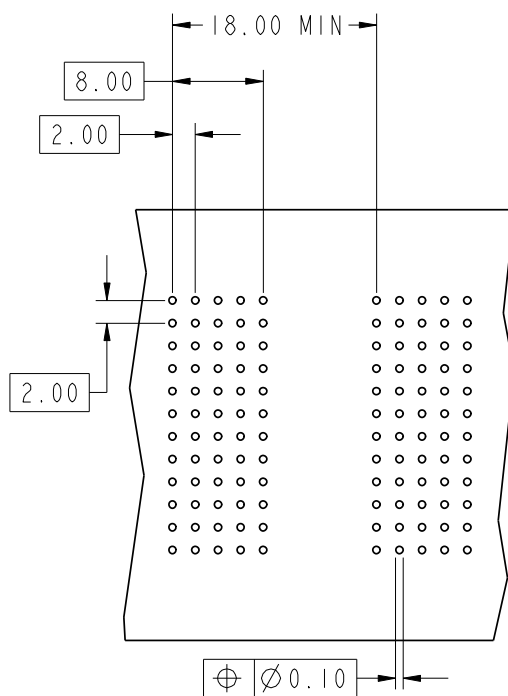

KEY (SIGNAL PRESS-FIT)		
CODE	DIMENSIONS	
	DIM "A" MATE	DIM "B" TAIL
1	5.00	4.30
2	5.75	4.30
3	6.50	4.30
4	7.25	4.30
5	5.00	13.60
6	5.75	13.60
7	6.50	13.60
8	7.25	13.60
19	8.00	4.30
20	8.00	13.60
39	8.00	14.10
54	5.00	11.55
55	5.75	11.55
57	7.25	11.55

REQUIRED PC BOARD LAYOUT
COMPONENT SIDE
SEE PRINT 58351 FOR
ADDITIONAL PCB INFORMATION

This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.



mat'l code				tolerances unless otherwise specified		CUSTOMER		FCI	
lir	ecm no.	dr	date	linear	0.X ±0.3	projection	COPY	www.fciconnect.com	
AC					0.XX ±0.13				
					.XXX ±0.051				
				angles	0° ±2°	MM	scale	product family METRAL	
				dr	T. BRUNGARD 11/19/99				
				enr	M. STRAWSER 11/19/99				
				chr	M. STRAWSER 11/19/99	A	88902	code 213	
				appd	M. STRAWSER 02/29/00				
sheet index	revision sheet								

1 | 2

Pro/E

PDM: Rev:AC

STATUS Released

Printed: Jul 01, 2010



1 2										3										4																									
METRAL P/N		ROW	CONTACT CODE MOD. I					METRAL P/N		ROW	CONTACT CODE MOD. I					METRAL P/N		ROW	CONTACT CODE MOD. I					METRAL P/N		ROW	CONTACT CODE MOD. I																		
			1	2	3	4	5	6				1	2	3	4	5	6				1	2	3	4	5	6				1	2	3	4	5	6										
88902-X01 SEE NOTE 11 FOR LEAD FREE		E	2	2	2	2	19	19	88902-X06 SEE NOTE 11 FOR LEAD FREE		E	2	2	2	4	2	2	88902-X11 SEE NOTE 11 FOR LEAD FREE		E	2	2	2	1	2	1	88902-X16 SEE NOTE 11 FOR LEAD FREE		E	2	2	2	2	3	2	88902-X21 SEE NOTE 11 FOR LEAD FREE		E	2	2	2	2	2	2	
		D	2	2	2	2	19	19			D	2	2	2	2	4	2			2	D	2	2	2	2	2			2	D	2	2	2	2	2			2	2						
		C	2	1	2	3	2	2			C	2	2	2	4	2	2			C	3	2	4	2	2	2			C	2	2	2	2	2	2			2							
		B	2	2	2	2	19	19			B	2	2	2	4	2	2			B	2	2	2	2	2	2			B	2	19	2	19	2	2			2	2						
		A	2	2	2	2	19	19			A	2	2	2	4	2	2			A	2	4	2	2	2	3			A	2	19	2	19	2	2			2	2						
88902-X02 SEE NOTE 11 FOR LEAD FREE		E	6	6	6	6	20	20	88902-X07 SEE NOTE 11 FOR LEAD FREE		E	5	7	5	5	5	5	5	88902-X12 SEE NOTE 11 FOR LEAD FREE		E	6	6	6	5	6	5	88902-X17 SEE NOTE 11 FOR LEAD FREE		E	4	-	2	-	2	-	88902-X22 SEE NOTE 11 FOR LEAD FREE		E	2	2	2	2	2	2
		D	6	6	6	6	20	20			D	5	7	5	5	5	5	5			D	-	2	-	2	-	2			D	2	2	2	2	2	2			2						
		C	6	5	6	7	6	6			C	5	7	5	5	5	5	5			C	2	-	4	-	4	-			C	4	2	2	2	2	2			2						
		B	6	6	6	6	20	20			B	5	7	5	5	5	5	5			B	6	6	6	6	6	6			B	2	2	2	2	19	19			2						
		A	6	6	6	6	20	20			A	5	7	5	5	5	5	5			A	6	6	6	5	6	5			A	1	2	2	2	19	19			2						
88902-X03 SEE NOTE 11 FOR LEAD FREE		E	5	3	3	3	3	3	88902-X08 SEE NOTE 11 FOR LEAD FREE		E	3	2	2	2	2	2	88902-X13 SEE NOTE 11 FOR LEAD FREE		E	2	-	2	-	2	-	88902-X18 SEE NOTE 11 FOR LEAD FREE		E	2	-	2	-	2	-	88902-X23 SEE NOTE 11 FOR LEAD FREE		E	2	2	3	4	5	6	
		D	5	3	3	3	3	3			D	3	2	2	2	2	2			D	-	2	-	2	-	2			D	-	2	-	2	-	2			-							
		C	5	3	3	3	3	3			C	3	2	2	2	2	2			C	2	-	2	-	2	-			C	2	-	4	-	4	-			4	-						
		B	5	3	3	3	3	3			B	3	2	2	2	2	2			B	-	2	-	2	-	2			B	-	2	-	2	-	2			-							
		A	5	3	3	3	3	3			A	3	1	2	2	2	2			A	2	-	2	-	2	-			A	2	-	2	-	2	-			2	-						
88902-X04 SEE NOTE 11 FOR LEAD FREE		E	7	6	6	6	6	6	88902-X09 SEE NOTE 11 FOR LEAD FREE		E	3	9	3	9	3	9	3	88902-X14 SEE NOTE 11 FOR LEAD FREE		E	2	2	2	2	2	2	88902-X19 SEE NOTE 11 FOR LEAD FREE		E	6	6	6	6	6	6	88902-X24 SEE NOTE 11 FOR LEAD FREE		E	2	2	2	2	2	2
		D	7	6	6	6	6	6			D	3	9	3	9	3	9	D			6	6	6	6	6	6	D			2	2	2	2	2	2	2									
		C	7	6	6	6	6	6			C	3	9	3	9	3	9	C			8	6	6	6	6	6	C			2	2	2	2	2	2	4									
		B	7	6	6	6	6	6			B	3	9	3	9	3	9	B			6	6	6	6	20	20	B			19	19	2	2	2	2										
		A	7	6	6	6	6	6			A	3	9	3	9	3	9	A			5	6	6	6	20	20	A			19	19	2	2	2	2										
88902-X05 SEE NOTE 11 FOR LEAD FREE		E	3	3	2	4	4	19	88902-X10 SEE NOTE 11 FOR LEAD FREE		E	4	2	2	2	2	2	88902-X15 SEE NOTE 11 FOR LEAD FREE		E	2	2	2	2	2	2	88902-X20 SEE NOTE 11 FOR LEAD FREE		E	6	6	6	6	6	6	88902-X25 SEE NOTE 11 FOR LEAD FREE		E	2	2	2	4	5	19	
		D	3	3	2	4	4	19			D	4	2	2	2	2	2			D	6	6	6	6	6	6			D	2	2	2	2	2	2			19							
		C	3	3	2	4	4	19			C	4	2	2	2	1	4			C	6	6	6	6	6	8			C	2	2	2	2	2	19										
		B	3	3	2	4	4	19			B	4	2	2	2	2	2			B	2	2	2	2	2	2			B	2	2	2	2	2	19										
		A	3	3	2	4	4	19			A	4	2	2	2	2	2			A	2	4	2	2	2	2			A	2	2	2	2	2	19										

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X26 SEE NOTE 11 FOR LEAD FREE	E	1	2	2	2	2	1
	D	2	2	2	2	2	2
	C	2	2	2	2	2	2
	B	2	2	2	2	2	2
	A	1	2	2	2	2	1

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X27 SEE NOTE 11 FOR LEAD FREE	E	5	5	5	1	1	1
	D	5	5	5	1	1	1
	C	5	5	5	1	1	1
	B	5	5	5	1	1	1
	A	5	5	5	1	1	1

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X28 SEE NOTE 11 FOR LEAD FREE	E	19	2	19	2	2	1
	D	2	19	2	19	19	2
	C	19	2	19	2	2	19
	B	2	19	2	19	19	2
	A	19	2	19	2	2	19

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X29 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2	2
	D	2	2	2	2	2	2
	C	2	2	2	2	2	2
	B	2	2	1	2	2	2
	A	2	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X30 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	1	2	4
	D	2	2	2	2	2	2
	C	2	2	2	2	2	2
	B	2	2	2	2	2	2
	A	2	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X31 SEE NOTE 11 FOR LEAD FREE	E	4	2	3	3	2	4
	D	4	2	3	3	2	4
	C	4	2	3	3	2	4
	B	4	2	3	3	2	4
	A	4	2	3	3	2	4



mat'l code				--		tolerances unless otherwise specified		CUSTOMER		FCI		www.fciconnect.com				
lfr	ecn no.	dr	date	linear	0.X ±0.3		COPY			title METRAL SIGNAL HEADER 1 MOD, 5 ROW PRESS-FIT						
AC					0.XX ±0.13		projection									
					.XXX ±.051											
				angles	0° ±2°											
				dr	T.BRUNGARD	11/19/99			product family				METRAL		code	
				enrg	M.STRAWSER	11/19/99			size		dwg no		213		sheet	
				chr	M.STRAWSER	11/19/99			scale		A		88902		4	
				appd	M.STRAWSER	02/29/00	1:1									
sheet index		revision sheet														

This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9