


Manual Switches

Electronic Control Pushbutton

MML21 Series

LED, INCANDESCENT, OR NON-LIGHTED DISPLAY

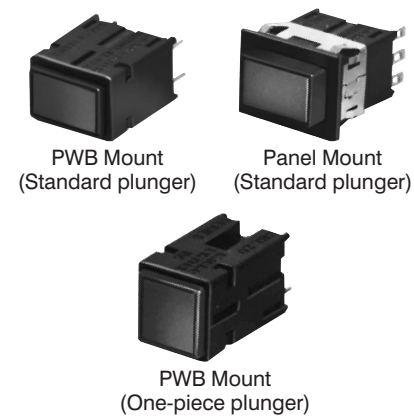

- FEATURES**
- Silver or gold contacts
 - Choice of rectangular or square housings
 - Accepts one LED or incandescent lamp
 - Printed wiring board or snap-in panel mounting
 - Bezels and mounting clips, LEDs and legended lenses can be furnished installed or ordered separately
 - UL recognized, CSA certified

Example: MML21KK3AAK
Electronic control pushbutton switch with standard plunger; rectangular housing (black); bezel (black); mounting clips on long sides, PWB terminals; 1-pole, momentary action, silver contacts, black plunger.

Example: MML21KK3AAKRSDR
As above, except furnished with red LED and red lens installed.

MML21KK3AAHRSXX20 as above, legended.

Catalog listing codes for switch, less assembled display options

MML21 STANDARD PLUNGER SWITCHES ORDER GUIDE

MML21K		K		3		AA	
Housing Type		Mounting		Terminals		Circuitry/Action (Each pole is double throw)	
		Rectangular	Square			Rectangular	Square
MML21K Rectangular Black Housing		A No bezel (PWB mounting)	A No bezel (PWB mounting)	3 Printed Wiring Board		Silver Contacts: AA 1 pole, mom. action	Silver contacts: AA 1-pole, mom. action
MML21H Square Black Housing		K Black bezel, mtg. clip/long sides	R Black bezel & mtg. clip	2 Solder		AB 1 pole, alt. action	AB 1-pole, alt. action
						AC 2 pole, mom. action	
						AD 2 pole, alt. action	
						Gold Contacts:	Gold contacts
						BA 1 pole, mom. action	BA 1-pole, mom. action
						BB 1 pole, alt. action	BB 1-pole, alt. action
						BC 2 pole, mom. action	
						BD 2 pole, alt. action	

MML21 ONE PIECE LENS/PLUNGER SWITCHES ORDER GUIDE

Catalog listing codes for switch, less assembled display options

MML21H		K		3		AA	
Housing Type		Mounting		Terminals		Circuitry/Action (Each pole is double throw)	
		Rectangular	Square			Rectangular	Square
MML21K Rectangular Black Housing		A No bezel (PWB mounting)	A No bezel (PWB Mounting)	3 Printed Wiring Board		Silver Contacts: AA 1 pole, mom. action	Silver contacts: AA 1-pole, mom. action
MML21H Square Black Housing		K Black bezel, mtg. clip/long sides	R Black bezel & mtg. clip	2 Solder		AB 1 pole, alt. action	AB 1-pole, alt. action
						AC 2 pole, mom. action	
						AD 2 pole, alt. action	
						Gold Contacts:	Gold contacts
						BA 1 pole, mom. action	BA 1-pole, mom. action
						BB 1 pole, alt. action	BB 1-pole, alt. action
						BC 2 pole, mom. action	
						BD 2 pole, alt. action	

Electrical Data page 69
Bezels page 84
Strip and matrix mounting page 83
PWB pin locations page 91

Order display options assembled to switch by adding codes below³

Diagram showing switch configurations for Plunger Type (K, W), LED* (XX, RS, YS, GS), Lens (XX, DR, DY, DG, LR, LY, LG, LW, LK), and Legend (20). Includes a CUSTOMER INSTALLATION section with instructions for LED and Incandescent Lamp.

Order display options assembled to switch by adding codes below

Diagram showing switch configurations for Button Color (One Piece Plunger) (H, L, N, R, Y, G, Z), LED* (XX, RS, YS, GS), and Legend (XX20). Includes instructions for legend order sheet.

- *Notes:
1. When an LED is specified in a rectangular MML21 listing, MICRO SWITCH will permanently install it in the housing.
2. MICRO SWITCH does not permanently install an LED in a square MML21 listing. To install an LED in a square housing, order a MML93L or MML93G receptacle and a MML92 LED (see pages 86 and 88).
3. Include four digits (XXXX or XX DR) when a legend is required.
4. For square or rectangular only.
5. For rectangular only.

Manuals

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9