


Manual Switches

Electronic Control Pushbutton

MML21 Series

LED, INCANDESCENT, OR NON-LIGHTED DISPLAY

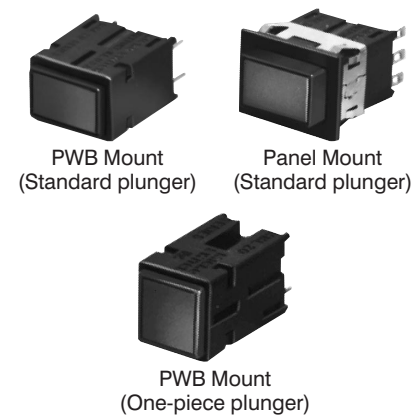

- FEATURES**
- Silver or gold contacts
 - Choice of rectangular or square housings
 - Accepts one LED or incandescent lamp
 - Printed wiring board or snap-in panel mounting
 - Bezels and mounting clips, LEDs and legended lenses can be furnished installed or ordered separately
 - UL recognized, CSA certified

Example: MML21KK3AAK
Electronic control pushbutton switch with standard plunger; rectangular housing (black); bezel (black); mounting clips on long sides, PWB terminals; 1-pole, momentary action, silver contacts, black plunger.

Example: MML21KK3AAKRSDR
As above, except furnished with red LED and red lens installed.

MML21KK3AAHRSXX20 as above, leg-ended.

Catalog listing codes for switch, less assembled display options

MML21 STANDARD PLUNGER SWITCHES ORDER GUIDE

MML21K		K		3		AA	
Housing Type		Mounting		Terminals		Circuitry/Action (Each pole is double throw)	
		Rectangular	Square			Rectangular	Square
MML21K Rectangular Black Housing		A No bezel (PWB mounting)	A No bezel (PWB mounting)	3 Printed Wiring Board		Silver Contacts: AA 1 pole, mom. action	Silver contacts: AA 1-pole, mom. action
MML21H Square Black Housing		K Black bezel, mtg. clip/long sides	R Black bezel & mtg. clip	2 Solder		AB 1 pole, alt. action AC 2 pole, mom. action AD 2 pole, alt. action Gold Contacts: BA 1 pole, mom. action BB 1 pole, alt. action BC 2 pole, mom. action BD 2 pole, alt. action	AB 1-pole, alt. action Gold contacts BA 1-pole, mom. action BB 1-pole, alt. action

MML21 ONE PIECE LENS/PLUNGER SWITCHES ORDER GUIDE

Catalog listing codes for switch, less assembled display options

MML21H		K		3		AA	
Housing Type		Mounting		Terminals		Circuitry/Action (Each pole is double throw)	
		Rectangular	Square			Rectangular	Square
MML21K Rectangular Black Housing		A No bezel (PWB mounting)	A No bezel (PWB Mounting)	3 Printed Wiring Board		Silver Contacts: AA 1 pole, mom. action	Silver contacts: AA 1-pole, mom. action
MML21H Square Black Housing		K Black bezel, mtg. clip/long sides	R Black bezel & mtg. clip	2 Solder		AB 1 pole, alt. action AC 2 pole, mom. action AD 2 pole, alt. action Gold Contacts: BA 1 pole, mom. action BB 1 pole, alt. action BC 2 pole, mom. action BD 2 pole, alt. action	AB 1-pole, alt. action Gold contacts BA 1-pole, mom. action BB 1-pole, alt. action

Electrical Data page 69
Bezels page 84
Strip and matrix mounting page 83
PWB pin locations page 91

Order display options assembled to switch by adding codes below³

Diagram showing switch configurations: Plunger Type (K, W), LED* (XX, RS, YS, GS), Lens (XX, DR, DY, DG, LR, LY, LG, LW, LK), and Legend (20). Includes a CUSTOMER INSTALLATION section with instructions for LED and Incandescent Lamp.

Order display options assembled to switch by adding codes below

Diagram showing switch configurations: Button Color (One Piece Plunger) (H, L, N, R, Y, G, Z), LED* (XX, RS, YS, GS), and Legend (XX20). Includes instructions for legend order sheet.

- *Notes:
1. When an LED is specified in a rectangular MML21 listing, MICRO SWITCH will permanently install it in the housing.
2. MICRO SWITCH does not permanently install an LED in a square MML21 listing. To install an LED in a square housing, order a MML93L or MML93G receptacle and a MML92 LED (see pages 86 and 88).
3. Include four digits (XXXX or XX DR) when a legend is required.
4. For square or rectangular only.
5. For rectangular only.

Manuals

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9