



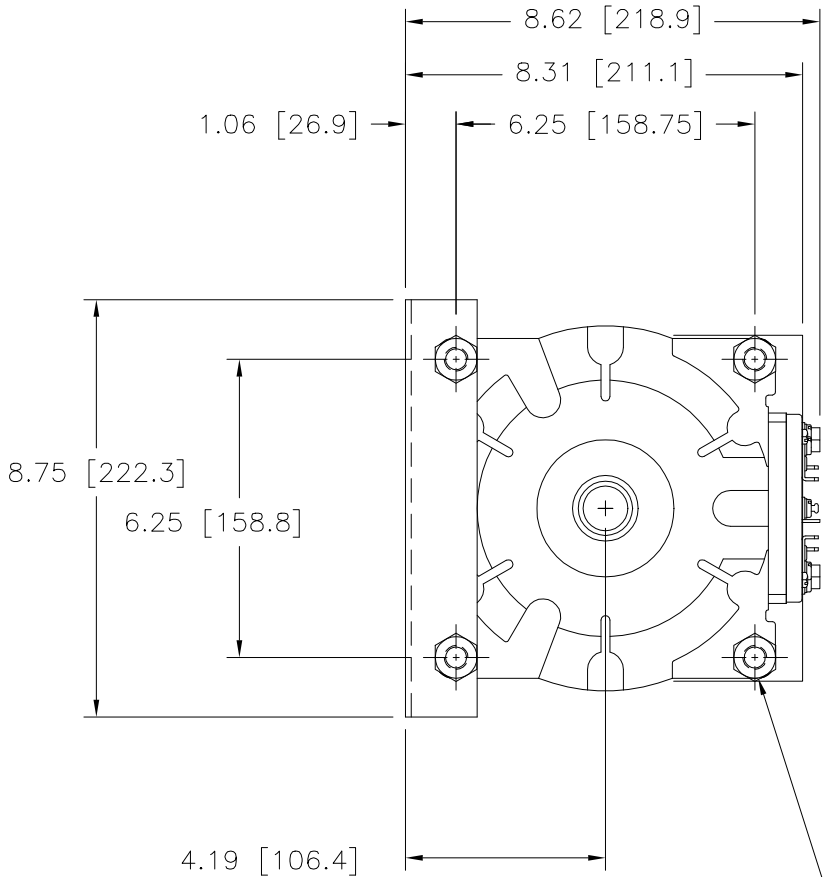


STANDOFFS TAPPED
1/2-13 X .50 (12.7)
DEEP FOR MTG. BOLTS
(4) PLACES

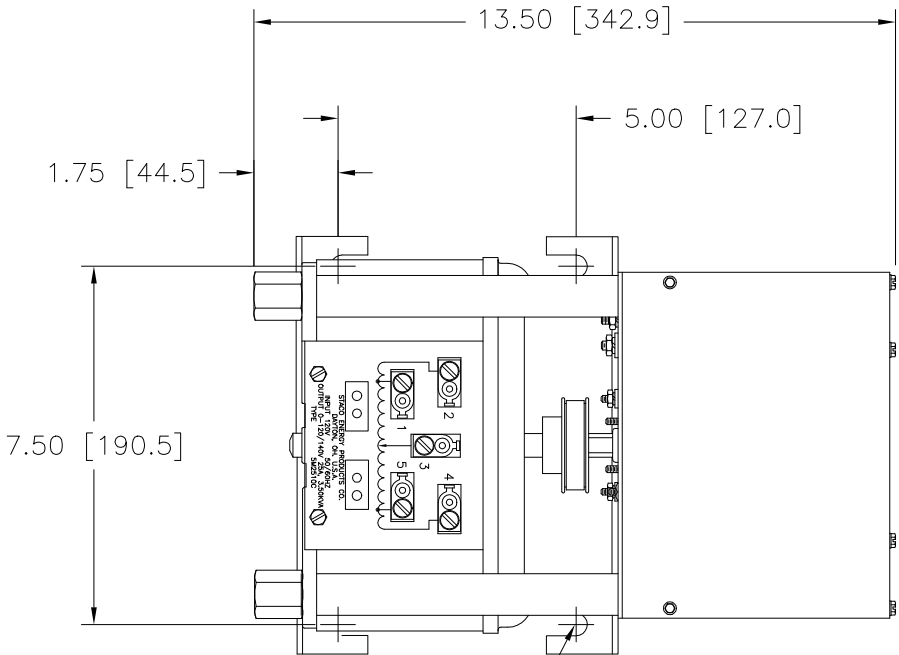


.41 [10.3] WIDE MOUNTING SLOTS
(4) PLACES

+ MOTOR DRIVEN UNITS USE TERMINAL CONNECTORS FOR CCW
INCREASING VOLTAGE, AS VIEWED FROM THE BASE END.

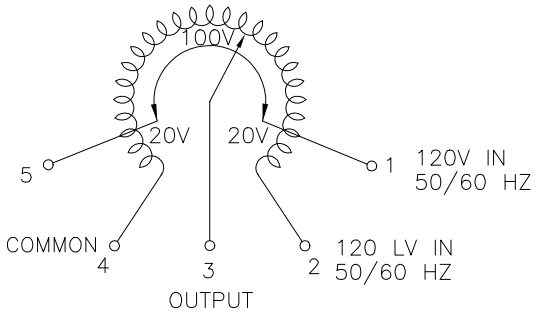

SCHEMATIC
VIEW FROM BASE END

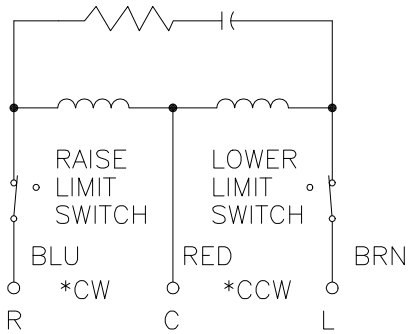

MOTOR CIRCUIT
120V 50/60 HZ.
MOTOR SPEED: SEE CHART
* ROTATION AS VIEWED
FROM MOTOR END

SPEED (SECONDS)	MODEL NUMBER
5	5M2510C
15	15M2510C
30	30M2510C
60	60M2510C

SPECIFICATIONS																	
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS									
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END +									
				MAX. AMPS	MAX. KVA	MAX. AMPS		MAX. KVA	INPUT	JUMPER	OUTPUT						
SINGLE PHASE	120	50/60	0-120	25	3.00	30	3.6	CW	2-4	——	4-3						
									CCW	2-4	——	2-3					
			0-140	25	3.50	——	——		CW	1-4	——	4-3					
									CCW	2-5	——	2-3					
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±				UNITS		TITLE:											
DECIMALS		Holes .002	ANGLES 1°	DRAFT 1-1/2°		IN [mm]		SPEC. CONTROL DRAWING									
XX .010								VARIABLE TRANSFORMER									
.XXX .005								TYPE: M2510C									
MATERIAL:				ALL DIMENSIONS APPLY AFTER PLATING		 STACO ENERGY PRODUCTS CO. A Components Corporation of Arneson Company 301 Gadde Boulevard Dayton, Ohio 45403 USA											
The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights thereto, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.						DRAWN BY		DATE		FIRST USED ON		DO NOT SCALE DWG.					
						TIM RAU		4/7/97									
						CHECKER		DATE		WEIGHT APPROX.		CAGE CODE		DWG. SIZE		DWG. NO.	
												83008		D		031-5110	
ENGINEER		DATE		SCALE		.5=1		SHEET 1 OF 1									



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9