LETTER CODE	CABLE DIAMETER RANGE (INCHES)	CABLE TYPES	REFERENCE CABLE GROUP: TIP-CRIMP	REFERENCE CABLE GROUP: WRAP-CRIMP
A	.070 / .110	RG 174, RG 316, RG 316, RG 178, RG179/U 00001	-001 -004	-5 -54
I	.110 / .160	CD 100, AT&T 223A,DC-001 RG10, 121 SEMI-RIGID TYPE, RG-200	-000 -001 -003	-4 -55 -56
B	.160 / .210	RG-58/U-2, RG-58, RG 302, RG 303,RG179/U 00001 DIAMETRONIC	-011 -012	-1 -61
C	.150 / .200	RG-165, RG-141, RG-400, RG179/U-2	-011 -013	-1
D	.205 / .270	TT-95-2 RG-213,RG-6, RG-8M 9913, AT&T 224A, 90-82	-013 -014 -016 -017 -025	-2 60
FI	.271 / .365	USCI FSF 142, AT&T 720 AND AT&T 725	-015	-8
HF	.271 / .305	FSFH-FIBERFLEX & FONLY	-018	5
F A	.300 / .430	RG-8, RG-11, RG-213, 9913A DIAGNOST	.....	-8A -55

ITEM NO.	DESCRIPTION	PART NO. NORTH & SOUTH AMERICA	PART NO. EUROPE	PART NO. UNITED KINGDOM
1	AC POWER CONVERTER	ACS-NA	ACS-EU	ACS-UK
2	AC TRICKLE CHARGER FOR NI-CAD BATTERY	CTT-NA	CCC-EU	CCC-UK
3	AUTO 12V DC CHARGER CTSP FOR NI-CAD BATTERY	DCC	[illegible]	[illegible]
4	12V DC-DC BATTERY PACK METER KIT	BTP-NA	BTP-EU	BTP-UK

REVISIONS

REV	DESCRIPTION
G	REVISED PER ECO 15174

010-0083 SH 1

DRAWN APPROVED 6/12/06 MCS

RED INDICATES ORIGINAL

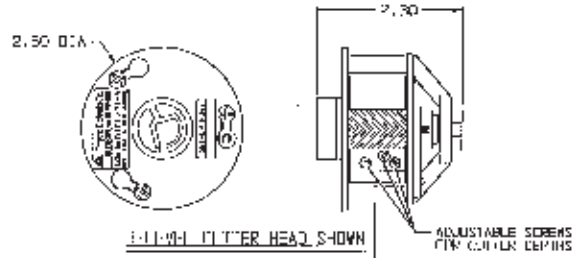

3-LEVEL CUTTER HEAD SHOWN

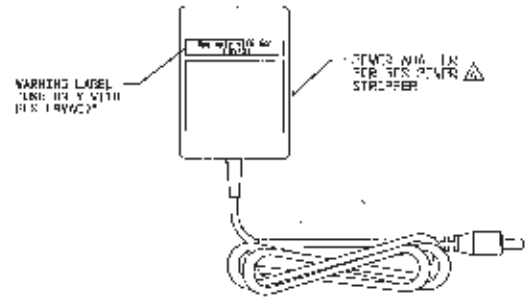

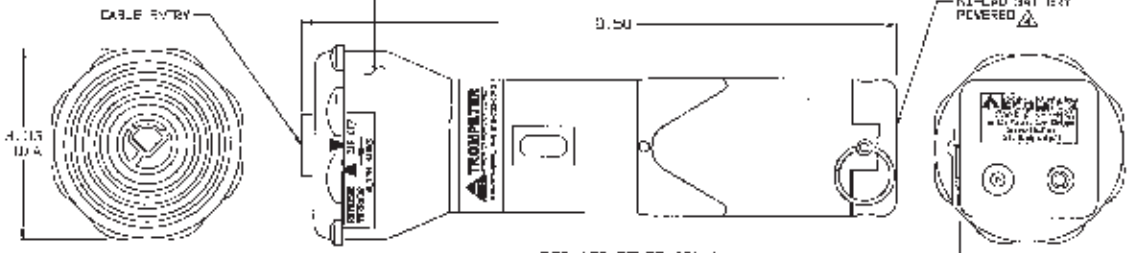

BCS/ACS POWER STRIPPER

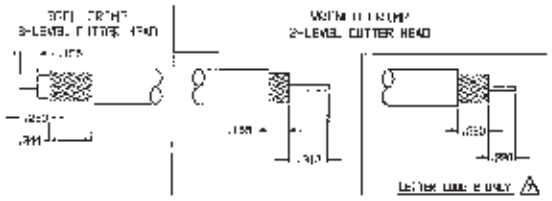

STRIPPING DIMENSIONS

SCALE: NONE

1. ALL DIMENSIONS IN INCHES

2. PORTABLE, HAND HELD, POWERED COAX CABLE STRIPPER KIT WITH AND WITHOUT CUTTER HEADS, WITH OPTIONAL POWER SOURCES. SEE TABLE 2

3. EXAMPLE OF COMPLETE MODEL NO.

BCS / C24T 3 A

- CABLE RANGE LETTER CODE USE TABLE 1
- 3 = 3-LEVEL FOR TOOL CRIMP; 2 = 2-LEVEL FOR WRAPER CRIMP
- CUTTER HEAD BASIC PART NO.
- POWER STRIPPER TOOL:

BCS = NI-CAD BATTERY WITH AC & DC CHARGER FOR NORTH & SOUTH AMERICA

BCS = NI-CAD BATTERY WITH AC & DC CHARGER AND RAPID CHARGER FOR NORTH & SOUTH AMERICA

BCS-EU = NI-CAD BATTERY WITH AC & DC CHARGER FOR EUROPE

BCS-UK = NI-CAD BATTERY WITH AC & DC CHARGER FOR UNITED KINGDOM

ACS = AC POWER CONVERTER FOR NORTH & SOUTH AMERICA

ACS-EU = AC POWER CONVERTER FOR EUROPE

ACS-UK = AC POWER CONVERTER FOR UNITED KINGDOM

4. INDIVIDUAL BATTERY OR OPTIONAL POWER SOURCE MAY BE ORDERED AS SHOWN FOR TABLE 2

5. EACH KIT IS SHIPPED WITH A 12.5 X 9.5 X 5.4 CARRYING CASE AND USER INSTRUCTIONS

6. EACH ITEM MAY BE SOLD SEPARATELY

7. SEE SPECIAL STRIPPING DIMENSIONS

TROMPETER RF connectivity — a cinch connectivity solutions brand

DRAWN	6/9/06	TITLE: BCS/ACS POWER STRIPPING TOOL
CHKD.		
APPROVED	6/12/06	SIZE A; CAGE CODE 14949; DRAWING NO. 010-0083; REV. G
		SCALE NONE; DATE 10-16-03; SHEET 1 OF 1

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9