



8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
COPYRIGHT 20				BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.			
PART NUMBER		REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION	
1855493-1		A	122500-1	LEADMAKER	AIR FEED	CUTS CARRIER	
1855493-2		A	565435-5	BENCH MODEL K	AIR FEED	CUTS CARRIER	
1855493-3		A	354500-1	BENCH MODEL G	AIR FEED	CUTS CARRIER	
1855493-6		A	122500-1	LEADMAKER	AIR FEED	CONTINUOUS CARRIER	
7-1855493-7		A	-	-	-	SPARE PARTS	

- △ RECOMMENDED SPARE PARTS
△ GREASE LIGHTLY
△ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE

*** WARNING**
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN. REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

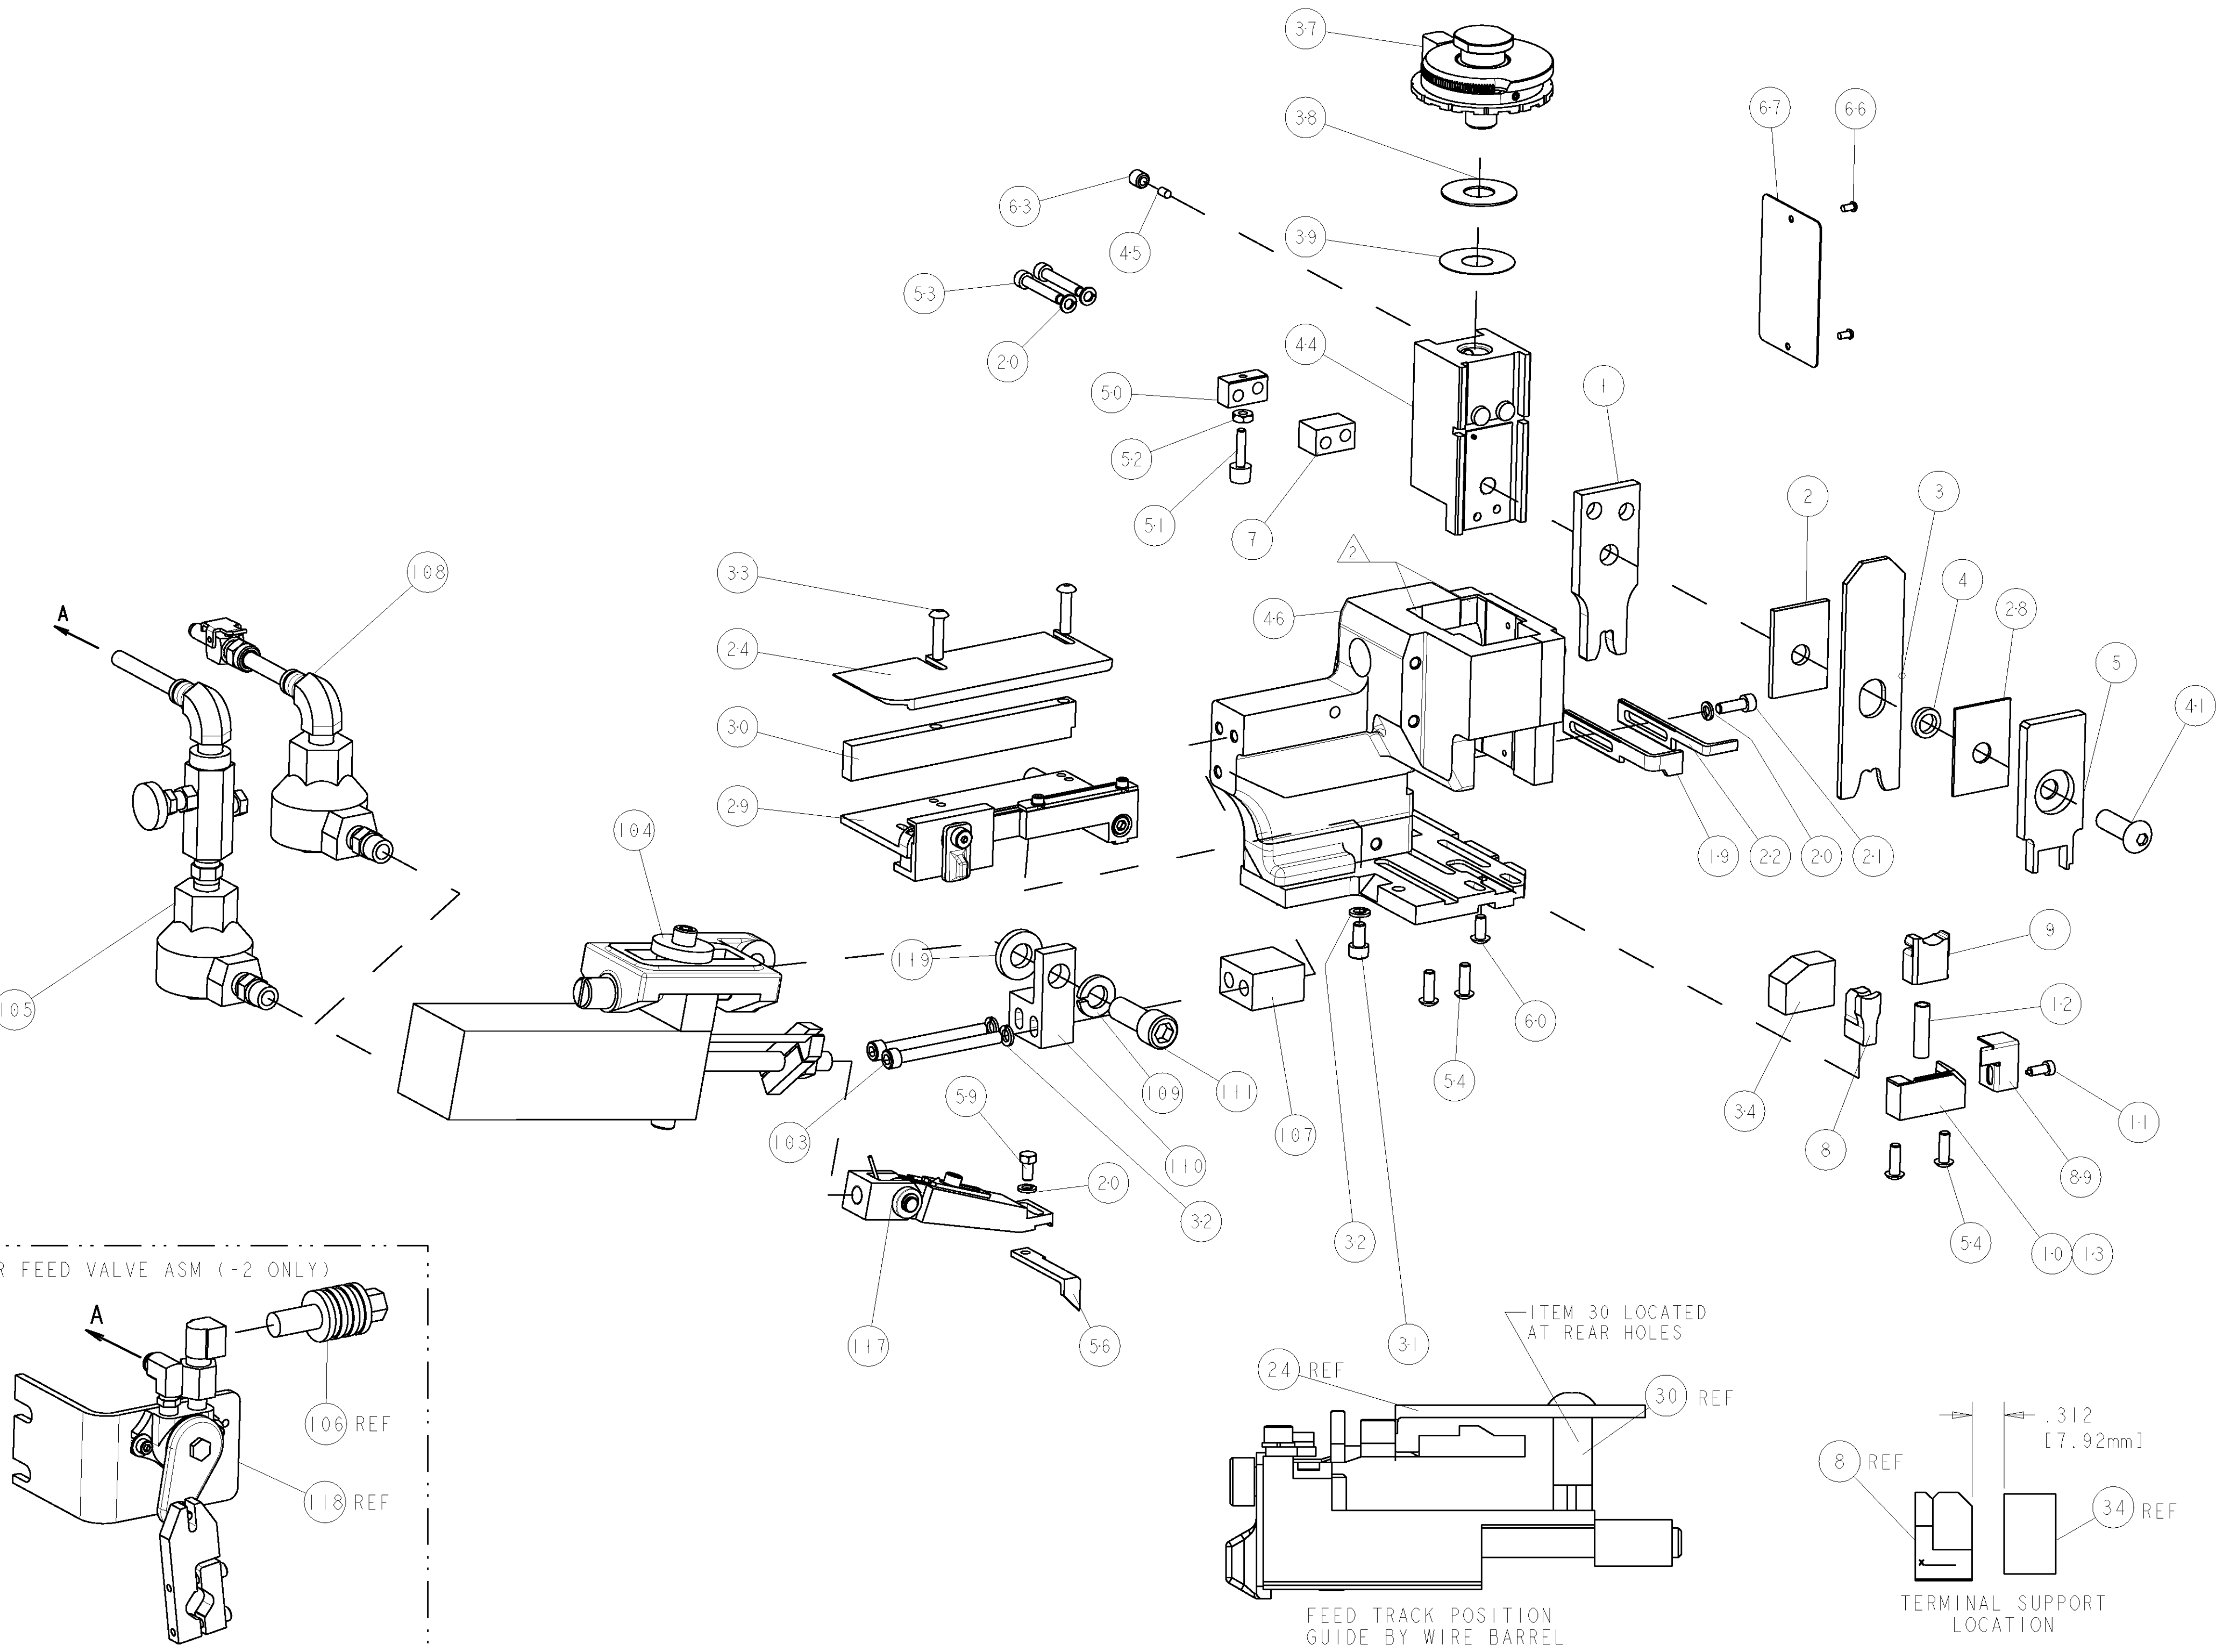

TERMINAL NAME: TAXI AS4 TERMINAL					
TE PN	DELPHI	DELPHI TERMINAL - DELPHI CRIMP SPECS			
286661	12092445				
-	-	CRIMP HEIGHT		WIRE SIZE	
-	-	3.25mm+.05/- .05[.128+.002/- .002]		(2) 5mm2	
-	-	2.95mm+.05/- .05[.116+.002/- .002]		(1) 3mm2+(1) 5mm2	
-	-				
-	-				
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	5.92mm [.233]	F	8.0-10.0mm2
-	-	INSUL	9.53mm [.375]	F	Ø3.531 - 4.470
WIRE STRIP LENGTH 7.85-8.36	TERM-APPL SPEC DELPHI	FEED 24.00	APPLICATOR INSTRUCTIONS 408-8040		SET UP GAGE 458637-1

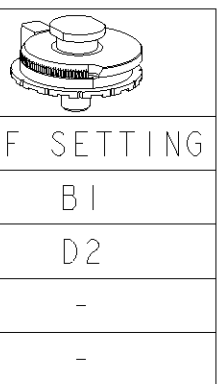

LOC	DIST	REVISONS			
A	66	P LTR	DESCRIPTION	DATE	OWN APVD
		A	RELEASED	24APR2009	KS GB

-	1	1	1	1	-	371178	WASHER	119
-	-	-	REF	-	-	692655-6	AIR FEED VALVE ASSEMBLY	118
-	1	1	1	1	-	461062-1	FEED FINGER ASSEMBLY	117
-	-	-	REF	-	..	455749-1	GUARD WINDOW	116
-	-	REF	-	-	..	679532-1	INSERT, GUARD	115
-	1	1	1	1	-	3-21001-5	SCR, SKT HD CAP 3/8-16 X 1.000	111
-	1	1	1	1	-	459610-1	MOUNT, FEED BRACKET	110
-	1	1	1	1	-	21024-8	WASHER, SPRG LOCK, REG 3/8	109
-	1	1	-	1	-	692655-7	AIR FEED VALVE ASSEMBLY	108
-	1	1	1	1	-	461690-1	SPACER, AIR FEED	107
-	-	-	REF	-	-	24024-2	VALVE, SHUT OFF	106
-	-	-	1	-	-	692655-5	AIR FEED VALVE ASSEMBLY	105
-	1	1	1	1	-	461065-2	ASSEMBLY, AIR FEED	104
-	2	2	2	2	-	4-21000-3	SCR, SKT HD CAP 10-32 X 2.000	103
-	1	1	1	1	-	318563-1	GUARD, FRONT CHIP	89
-	1	1	1	1	-	4088040	SF APPL INST 408-8040	72
-	1	1	1	1	-	217238-1	GENERAL INSTRUCTION PKG	71
-	1	1	1	1	-	461264-5	PLATE, IDENTIFICATION	67
-	2	2	2	2	-	21017-2	SCREW, DRIVE	66
-	1	1	1	1	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
-	1	1	1	1	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
-	1	1	1	1	-	2-22603-0	SCR, HEX HD CAP 8-32 X .312	59
-	1	1	1	1	-	458537-2	PAWL, FEED	56
-	4	4	4	4	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	54
-	2	2	2	2	-	3-21000-1	SCR, SKT HD CAP 8-32 X 1.000	53
-	1	1	1	1	-	21018-5	NUT, HEX, REG 6-32	52
-	1	1	1	1	-	811242-2	BUMPER, HOLD DOWN	51
-	1	1	1	1	-	690753-1	SPACER, TONKER	50
-	1	1	1	1	-	1633399-4	APPL., BASIC AIR FEED SUB ASSY	46
-	1	1	1	1	-	690191-1	PLUG,NYLON	45
-	1	1	1	1	-	3-819307-1	RAM, SIDE FEED	44
-	1	1	1	1	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
-	1	1	1	1	-	690125-1	SHIM SUB-ASSY	39
-	1	1	1	1	-	469367-8	SHIM	38
-	1	1	1	1	-	879103-2	FINE ADJUST HEAD ASSEMBLY	37
-	1	1	1	1	-	1-690786-4	TERMINAL SUPPORT	34
-	2	2	2	2	-	2-21002-4	SCR, BTN SKT HD CAP 8-32 X .750	33
-	3	3	3	3	-	21024-5	WASHER, SPRG LOCK, REG NO 10	32
-	1	1	1	1	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
-	1	1	1	1	-	1-1320908-2	SPACER, STRIP GUIDE	30
-	1	1	1	1	-	1633091-7	ASSEMBLY, STRIP GUIDE	29
-	1	1	1	1	-	1-455888-0	SPACER, CRIMPER	28
-	1	1	1	1	-	1320928-3	PLATE, STRIP GUIDE	24
-	1	-	-	1	-	690472-2	STRIPPER	22
-	1	1	1	1	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	21
-	4	4	4	4	-	21024-4	WASHER, SPRG LOCK, REG NO 8	20
-	-	1	1	-	-	691353-1	STRIPPER	19
-	1	-	-	-	-	679625-4	SHEAR HOLDER, FRONT (NO CUT)	13
-	1	1	1	1	-	3-22280-3	SPRING, COMPRESSION	12
-	1	1	1	1	-	1-690461-7	STOP, SHEAR	11
-	-	-	1	1	-	2-690459-2	SHEAR HOLDER, FRONT	10
-	1	1	1	1	-	318059-4	FLOATING SHEAR, FRONT	9
1	1	1	1	1	-	2-1633332-7	ANVIL, COMBINATION	8
-	1	1	1	1	-	2-240641-6	SPACER	7
-	-	-	-	-	..	-	-	6
-	1	1	1	1	-	122399-4	DEPRESSOR, SHEAR	5
-	1	1	1	1	-	3-238011-3	BLOCK, CRIMPER SPACER	4
1	1	1	1	1	-	4-1633511-8	CRIMPER, INSULATION F	3
-	1	1	1	1	-	2-455888-3	SPACER, CRIMPER	2
1	1	1	1	1	-	6-1633588-1	CRIMPER, WIRE	1

THIS IS A CUSTOMER DRAWING. IT IS THE CUSTOMER'S RESPONSIBILITY TO MAINTAIN THE DRAWING IN THE LATEST EDITION. NO CHANGES SHOULD BE CONSIDERED FOR THE LATEST EDITION.		DRAWN M. STAKEM	20APR2009	Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHKD M. HERR	20APR2009	NAME FINE ADJUST SIDE FEED HDM APPLICATOR	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD N. DEWING	20APR2009	PRODUCT SPEC	
1 PLC ±.01		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
2 PLC ±.01		WEIGHT		RESTRICTED TO	
3 PLC ±.01		CUSTOMER DRAWING		SCALE 3:5	
4 PLC ±.0001		SHEET 1 OF 1		REV A	
ANGLES ±.0001					
FINISH					

CUSTOMER VIEWABLE ASSEMBLY

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9