



Description

- Surface mount temperature compensated voltage controlled oscillator (TCVCXO) providing a high degree of frequency stability over a wide temperature range in a hermetically sealed ceramic package
- Model CFPT-126
- Model Issue number 5

Frequency Parameters

- Frequency 32.7680MHz
- Frequency Stability $\pm 0.50\text{ppm}$
- Operating Temperature Range -40.00 to 85.00°C
- Ageing $\pm 1\text{ppm}$ typical in 1st year @ 25°C

Electrical Parameters

- Supply Voltage $3.3\text{V} \pm 5\%$
- Current Draw (Typical): 3mA @ 20MHz
- Supply Voltage Variation:
 $<30\text{MHz} \pm 0.3\text{ppm}$
 $30\text{MHz to } 40\text{MHz} \pm 0.4\text{ppm}$
- Load Variation: $\pm 0.2\text{ppm}$ (@ $15\text{pF} \pm 10\%$)
After Reflow: $\pm 1.0\text{ppm}$

Frequency Adjustment

- Pulling $\pm 5\text{ppm}$ min
- Control Voltage $1.65\text{V} \pm 1.0\text{V}$

Output Details

- Output Compatibility HCMOS
- Drive Capability 15pF nom
- Rise and Fall Time 8.0ns max
- Duty Cycle 45/55%

Environmental Parameters

- Shock: IEC 60068-2-27, Test Ea: 980m/s^2 acceleration for 6ms , 3 shocks in each of 3 mutually perpendicular planes
- Vibration: IEC 60068-2-6, Test Fc, Procedure B4: 10Hz - 60Hz 1.5mm displacement, 60 - 2000Hz at 98.1m/s^2 , 30mins in 3 mutually perpendicular planes at 1 oct/min
- Solderability: MIL-STD-202, Method 208, Category 3
- Storage Temperature Range: -55 to 125°C

Manufacturing Details

- Soldering: Suitable for Convection Reflow soldering. Peak temperature 260°C , 60sec max above 220°C
- Washing: Able to withstand aqueous washing

Compliance


- RoHS Status (2011/65/EU) Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): 1

Packaging Details


- Pack Style: Bulk Loose in bulk pack
Pack Size: 100
- Alternative packing option available



Outline (mm)

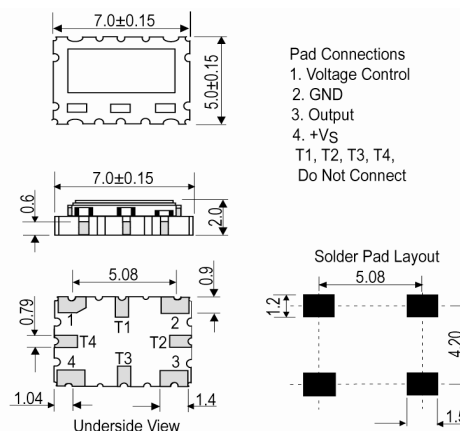

Test Circuit

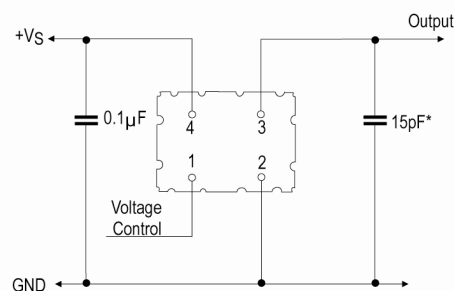


* Inclusive of probe and jig capacitance

Sales Office Contact Details:


UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

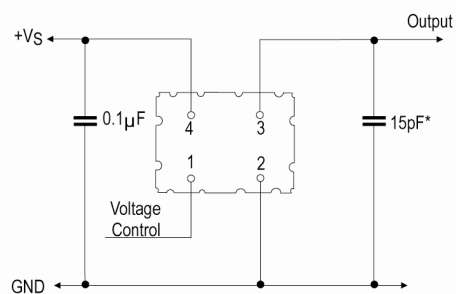Test Circuit


* Inclusive of probe and jig capacitance

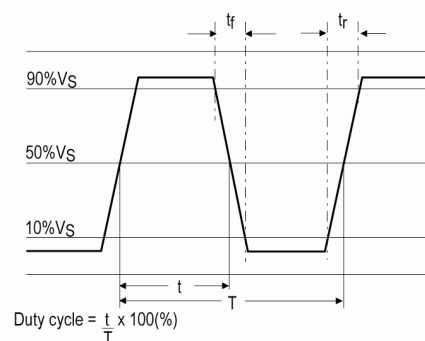Wave Form

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9