Property of Lite-On Only

FEATURES

- *0.28 inch (7 mm) DIGIT HEIGHT.
- *CONTINUOUS UNIFORM SEGMENTS.
- *LOW POWER REQUIREMENT.
- *EXCELLENT CHARACTERS APPEARANCE.
- *HIGH BRIGHTNESS & HIGH CONTRAST.
- *WIDE VIEWING ANGLE.
- * SOLID STATE RELIABILITY.
- *CATEGORIZED FOR LUMINOUS INTENSITY.

DESCRIPTION

The LTD-2701G is a 0.28 inch (7 mm) digit height dual digit seven-segment display. This device utilizes green LED chips, which are made from GaP on a transparent GaP substrate, and has a gray face and white segments.


DEVICE

PART NO.	DESCRIPTION			
Green	Duplex Common Cathode			
LTD-2701G	Rt. Hand Decimal			

PART NO.: LTD-2701G PAGE: 1 of 5


Property of Lite-On Only

PACKAGE DIMENSIONS

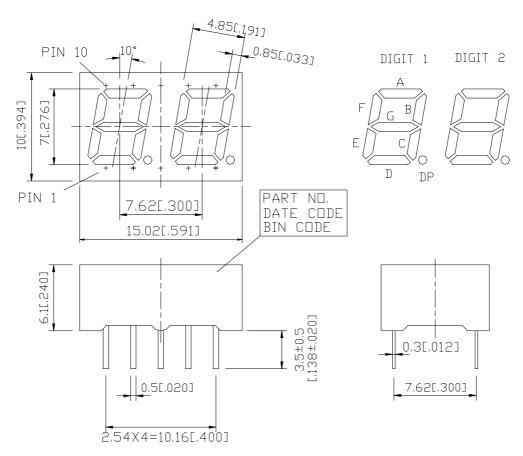

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm (0.01") unless otherwise noted.

INTERNAL CIRCUIT DIAGRAM

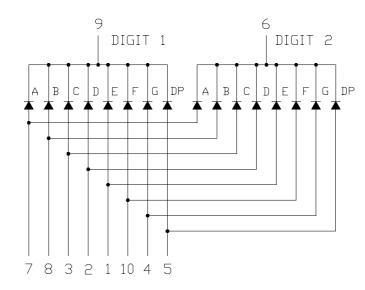

PART NO.: LTD-2701G PAGE: 2 of 5

Property of Lite-On Only

PIN CONNECTION

NO.	CONNECTION
1	ANODE E
2	ANODE D
3	ANODE C
4	ANODE G
5	ANODE DP
6	COMMON CATHODE (DIGIT 2)
7	ANODE A
8	ANODE B
9	COMMON CATHODE (DIGIT 1)
10	ANODE F

3 of 5 PAGE: PART NO.: LTD-2701G



Property of Lite-On Only

ABSOLUTE MAXIMUM RATING AT Ta=25°C

PARAMETER	MAXIMUM RATING	UNIT			
Power Dissipation Per Segment	75	mW			
Peak Forward Current Per Segment (1/10 Duty Cycle, 0.1ms Pulse Width)	100	mA			
Continuous Forward Current Per Segment	25	mA			
Derating Linear From 25°C Per Segment	0.33	mA/°C			
Reverse Voltage Per Segment	5	V			
Operating Temperature Range	-35°C to +85°C				
Storage Temperature Range	-35°C to +85°C				
Solder Temperature: max 260°C for max 3sec at 1.6mm below seating plane.					

ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta=25°C


PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	Iv	800	2000		μcd	I _F =10mA
Peak Emission Wavelength	λр		565		nm	I _F =20mA
Spectral Line Half-Width	Δλ		30		nm	I _F =20mA
Dominant Wavelength	λd		569		nm	I _F =20mA
Forward Voltage Per Segment	VF		2.1	2.6	V	I _F =20mA
Reverse Current Per Segment	Ir			100	μΑ	V _R =5V
Luminous Intensity Matching Ratio	Iv-m			2:1		I _F =10mA


Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.


PART NO.: LTD-2701G PAGE: 4 of 5


TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES


(25°C Ambient Temperature Unless Otherwise Noted)

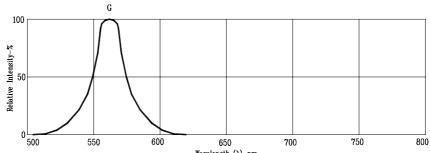












NOTE: G=GREEN

PART NO.: LTD-2701G PAGE: 5 of 5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lite-On:

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru 4 moschip.ru 9