


LOC	DIST	REVISIONS				
AJ	00	P	LTR	DESCRIPTION	DATE	DWN
		B		REV PER ECO 07-004710	3/2/2007	DW

NOTES:
1. CAPTURED CENTER CONTACT

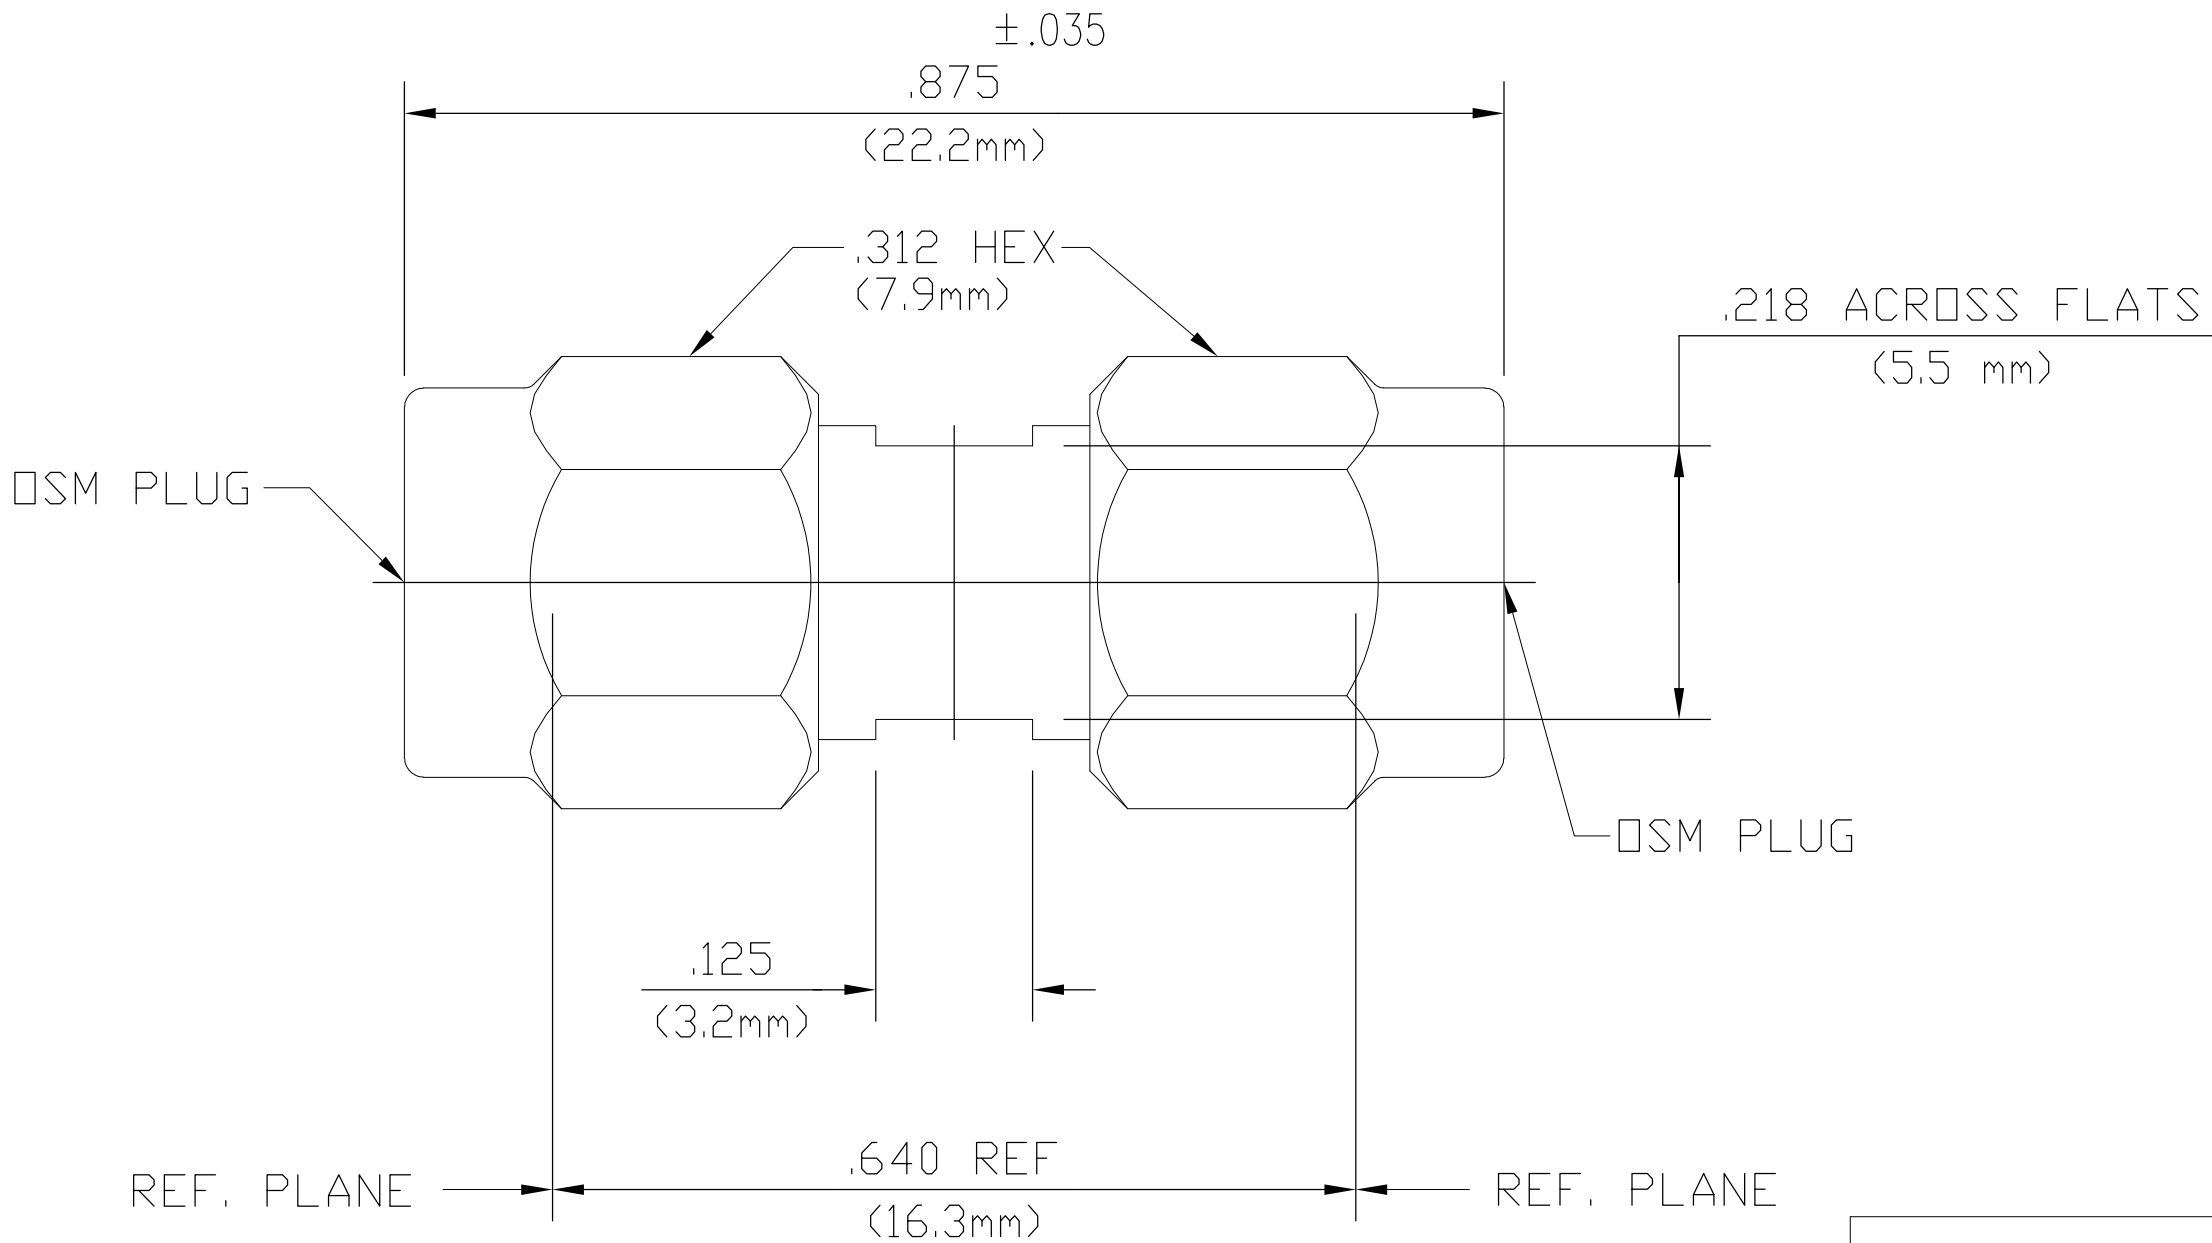

1056334-1

PART NUMBER

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348	TEMPERATURE RATING -65°C TO 105°C
Frequency Range (GHz) DC to 18.0	FIG 310.1	Vibration - MIL-STD-202, Method
Volt Rating (VRMS MAX) 335	Recommended Mating	204, Condition D
VSWR 1.05+006f(GHz) MAX	Torque 7.0 to 10.0 In/Lbs	Shock - MIL-STD-202, Method 213,
Insertion Loss (dB MAX) .06 √f(GHz)	Connector Engagement	Condition I
RF Leakage -[60-f(GHz)]	2.0 In/Lbs MAX	Thermal shock MIL-STD-202,
Corona, 70,000 Ft (VRMS MIN) 250	Center Contact Captivation	Method 107 Test Condition B
Dielectric Withstanding Voltage	Axial 6.0 Lbs MIN	EXCEPT HIGH TEMP 115°C
(VRMS MIN) 1000	Radial 4.0 In/Dz MIN	Moisture Resistance - MIL-STD-202,
Contact Resistance (Milliohms MAX)	Weight (Grams) 4.7	Method 106, except Step 7b
Center Contact 4.0		(Vibration) shall be omitted
Outer Contact 2.0		Corrosion - MIL-STD-202, Method
RF High Potential		101, Condition B, 5% salt spray
(VRMS MIN @ 5 MHz) 670		
I.R.(Megohms) 5000		

HOUSING COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290
DIELECTRIC	TFE FLUOROCARBON PER MIL-P-19468 AND FED SPEC L-P-403	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B196, ALLOY 173 OR BRASS PER ASTM-B-16	GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550
RETAINING RING	BERYLLIUM COPPER PER QQ-C-530	N/A
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A
COMPONENT	MATERIAL	FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BWC		6/9/67		tyco <i>Electronics</i> Tyco Electronics Corporation Harrisburg, PA 17105-3608			
		CHK PRB		5/8/68					
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD PRB		5/8/68		NAME	
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± 1°		PRODUCT SPEC —		OSM ADAPTER PLUG TO PLUG BULKHEAD ADAPTER —			
				APPLICATION SPEC —					
MATERIAL —		FINISH —		WEIGHT —		SIZE A2	CAGE CODE 00779	DRAWING NO C=1053634	RESTRICTED TO —
CUSTOMER DRAWING						SCALE 5:1	SHEET 1 of 1	REV B	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9