

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0850520696

Status:

Active

Overview:

din_41612

Description:

2.54mm (.100") Pitch DIN 41612 Receptacle, Style R Reverse, 32 Circuits

Documents:

3D Model

RoHS Certificate of Compliance (PDF)

Drawing (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

Backplane Connectors

Series

85052

Application

Backplane

Component Type

PCB Receptacle

Overview

din_41612

Product Name

IEC 603-2/DIN 41612

Style

R

Physical

Circuits (Loaded)

32

Circuits (maximum)

96

Durability (mating cycles max)

500

First Mate / Last Break

No

Flammability

94V-0

Guide to Mating Part

No

Keying to Mating Part

Yes

Number of Columns

16

Number of Pairs

Open Pin Field

Number of Rows

3

Orientation

Right Angle

PC Tail Length (in)

0.110 In

PC Tail Length (mm)

2.80 mm

PCB Locator

No

PCB Retention

Yes

PCB Thickness Recommended (in)

0.063 In, 0.126 In

PCB Thickness Recommended (mm)

1.60 mm, 3.20 mm

Packaging Type

Tray

Pitch - Mating Interface (in)

0.100 In

Pitch - Mating Interface (mm)

2.54 mm

Pitch - Term. Interface (in)

0.100 In

Pitch - Term. Interface (mm)

2.54 mm

Polarized to PCB

Yes

Stackable

No

Surface Mount Compatible (SMC)

No

Temperature Range - Operating

-55°C to +125°C

Termination Interface: Style

Through Hole

Electrical

Current - Maximum per Contact

2.5A

Data Rate


622.0 Mbps

Real Signals (per 25mm)

30

Voltage - Maximum

250V AC (RMS)

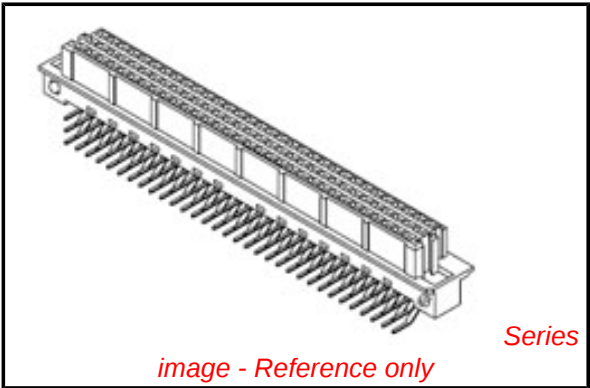

EU RoHS

ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status

China RoHS



Need more information on product
environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
85052Series

Mates With
DIN 41612 Headers 85003 , 85013

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Wave Capable (TH only)
Process Temperature max. C	260

Material Info




Reference - Drawing Numbers

Sales Drawing	SD-85052-0696, SDA-85052-0001
---------------	-------------------------------

This document was generated on 05/17/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

PART NO.
DWG. NO.

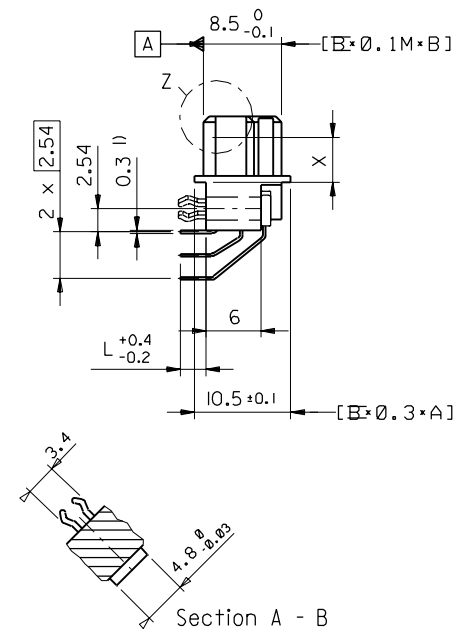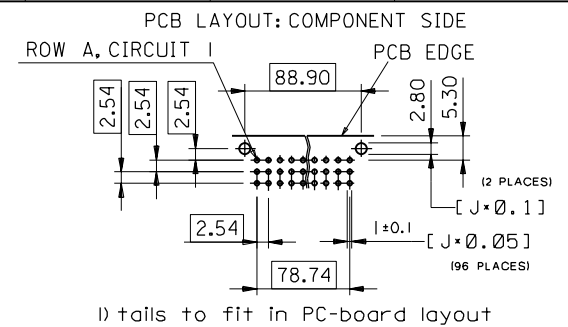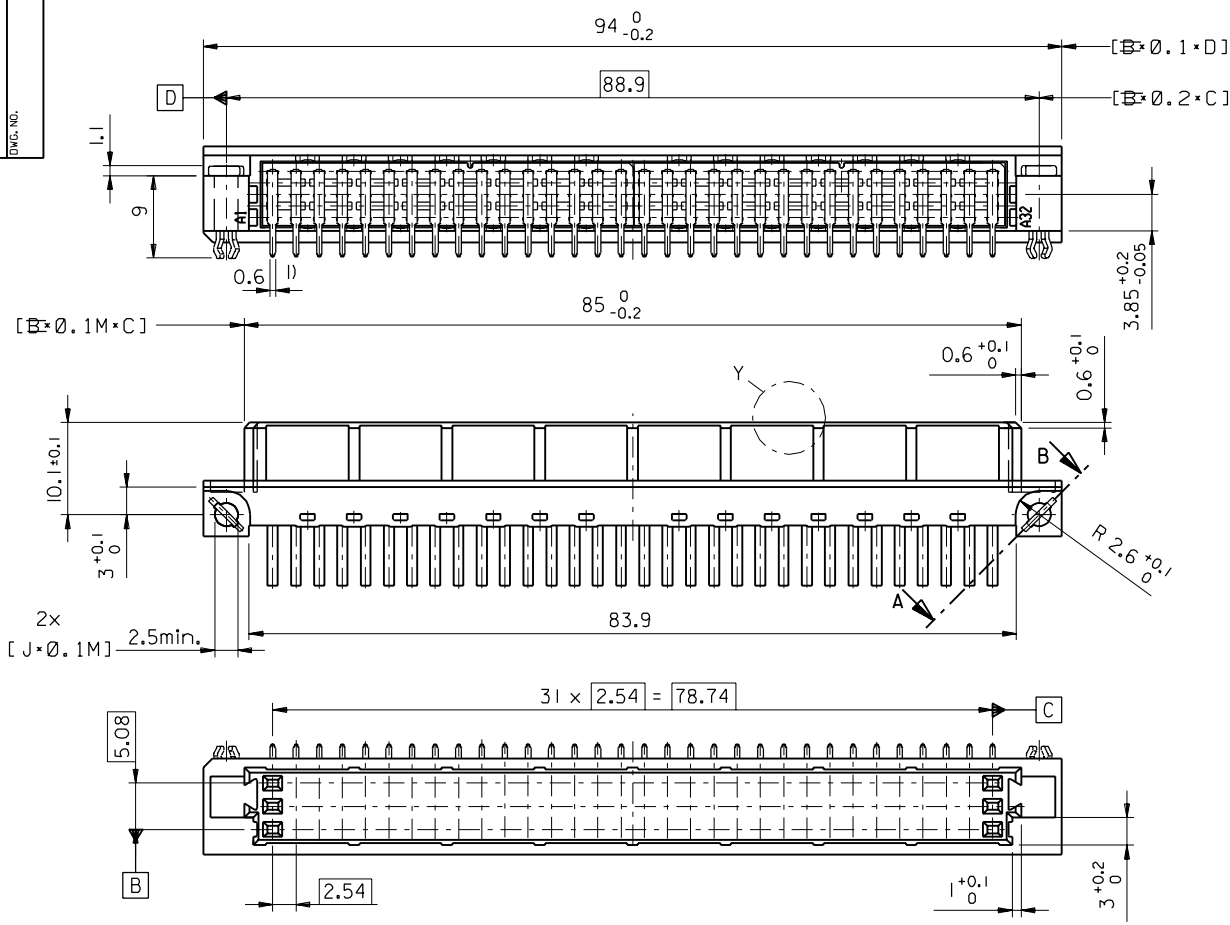

FIRST ANGLE PROJECTION		REVISIONS	
DRWG BY	SIGN	ECN MG1998-2586	BI
CHK'D BY	SIGN	hole pattern/L + 0.4-0.2	
APP'D BY	SIGN	97-09-15 KN	
SCALE			
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 2°		FOR PREVIOUS REVISIONS SEE MRI LIST	
INCH		METRIC	
3 PLACE ±		±	
2 PLACE ±		±	
1 PLACE ±		±	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DESIGN DIMENSION	
		EQUIVALENT DIMENSION	
		IF TWO DIMENSIONS ARE SHOWN THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY	

REVISE ONLY ON CAD SYSTEM		2	BI
CAD/CAM PROJECT NAME		SH.	REV.
85052000			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
TITLE		96 pos. female connector	
		DIN 41612 style R + clip	
		Dimensions	
MOLEX MOLEX EUROPE		SHEET NO.	DATE
		1 OF 2	96/04/25
PART NO.		DWG NO.	SIZE
		SDA-85052-0001	B

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9