



OPTION "F"

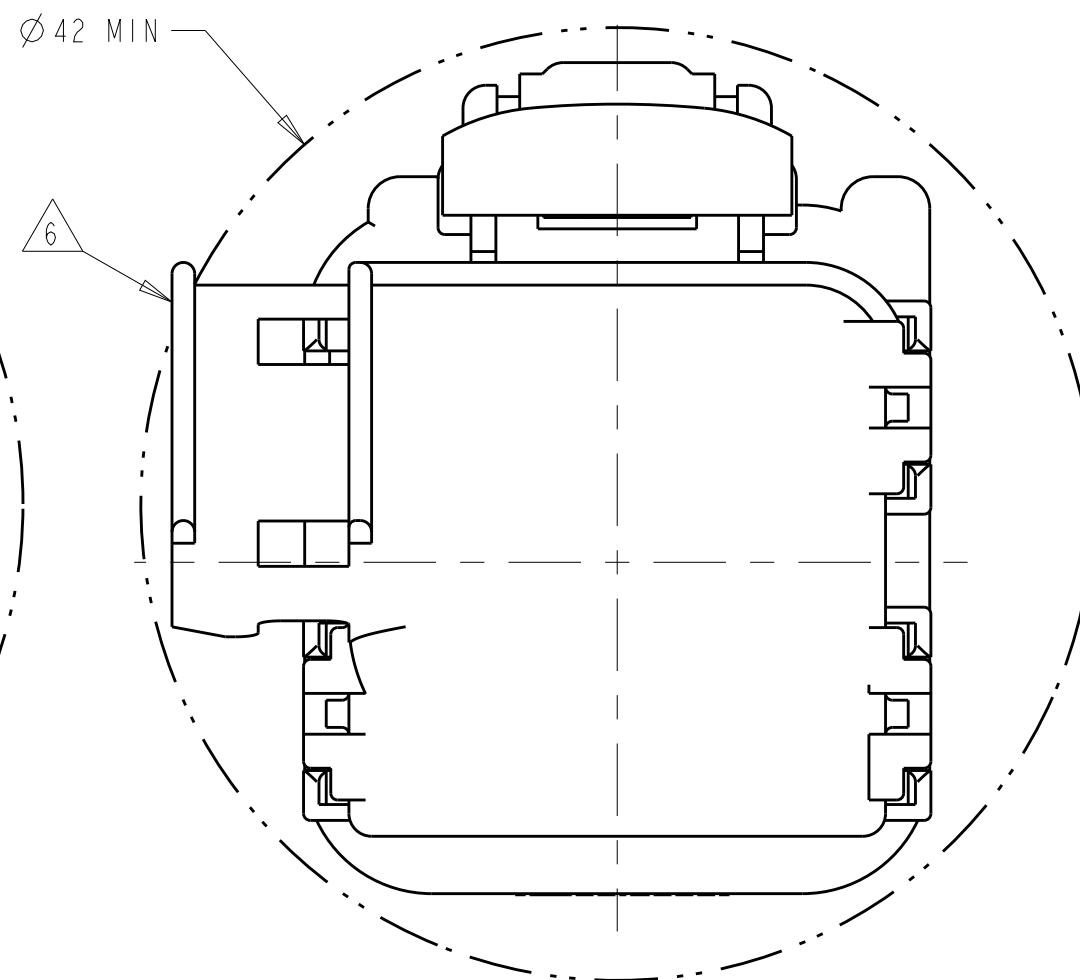


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

1. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPARATELY):
FOR TIN APPLICATIONS: 1393367 AND 1393366.
FOR GOLD APPLICATIONS: 1393365 AND 1393364.
FOR TERMINATION AND REELING OPTIONS
SEE DRAWINGS 1393367, 1393366, 1393365, AND 1393364.
2. COMPATIBLE WIRE SIZES FOR MAT SEAL DESIGN 1.19 TO 2.06 O.D.
(22-18 AWG, 0.35-0.75 mm2)
3. TPA IS SHIPPED IN ITS PRE-LOADED POSITION. ALL ASSEMBLIES ARE
TO BE TRAY PACKAGED.
4. CUSTOMER PART NUMBER AND TRACEABILITY CODE (YY = TWO DIGIT YEAR,
JJJ = JULIAN DAY, HH = TWO DIGIT MILITARY HOUR, A = ASSEMBLY
PROCESS USED) ARE PRINTED IN THIS LOCATION.
5. PART ASSEMBLY WEIGHT WITHOUT TERMINALS AND WITH STANDARD PIN-OUT
CONFIGURATION IS 14.39 GRAMS.
6. OPTIONAL WIRESHIELD P/N 7-1419157-8 (SOLD SEPARATELY), PLEASE CONTACT
YOUR TE SALES REPRESENTATIVE FOR AVAILABILITY AND PRICING.

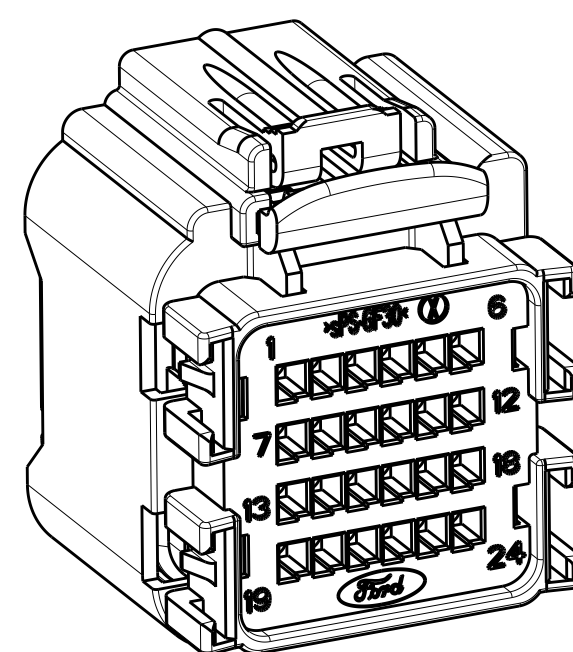

SCALE 2:1

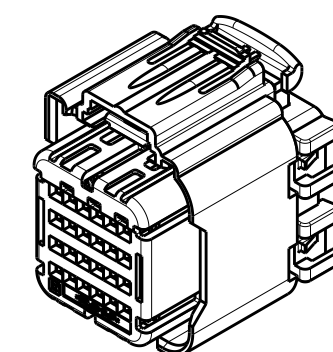


SCALE 1:1

[illegible]

6	CPA	PBT 15% GF	RED
5	PERIMETER SEAL	SILICONE	GREEN
4	GROMMET	SILICONE	BROWN
3	COVER	PA66 35% GF	BLACK
2	TPA WITH 3 SHORTING BAR POSITIONS CONFIGURATION	SPS 30% GF	RED
1	PUG WITH KEYING OPTION "F" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
1	PUG WITH KEYING OPTION "E" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
1	PUG WITH KEYING OPTION "D" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
1	PUG WITH KEYING OPTION "C" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	NATURAL
1	PUG WITH KEYING OPTION "B" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
1	PUG WITH KEYING OPTION "A" AND 3 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	GRAY
ITEM	DESCRIPTION	MATERIAL	FINISH/COLOR

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. NO. M. FORSKA 16APR2002 CHK. M. FORSKA 16APR2002 APPR. A. VALASER 16APR2002		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.3 2 PLC ±0.10 3 PLC ± 4 PLC ± ANGLES ±3°		NAME 24 WAY ARM, PLUG ASSEMBLY WITHOUT SHORTING BARS, CUSTOMER SPEC.	
		PRODUCT SPEC APPLICATION SPEC		SIZE CASE CODE DRAWING NO A1 00779 C-3-1419157-9	
MATERIAL SEE CHART ABOVE		FINISH WEIGHT SEE-NOTE 5 CUSTOMER DRAWING		RESTRICTED TO SCALE 3:1 SHEET 1 OF 3 REV B	

CPA		PBT 15% GF	RED
PERIMETER SEAL		SILICONE	GREEN
GROMMET		SILICONE	BROWN
COVER		PA66 35% GF	BLACK
TPA WITH		sPS 30% GF	RED
3 SHORTING BAR POSITIONS CONFIGURATION			
PLUG WITH KEYING OPTION "F" AND		PA66 35% GF	BLACK
3 SHORTING BAR POSITIONS CONFIGURATION			
PLUG WITH KEYING OPTION "E" AND		PA66 35% GF	BLACK
3 SHORTING BAR POSITIONS CONFIGURATION			
PLUG WITH KEYING OPTION "D" AND		PA66 35% GF	BLACK
3 SHORTING BAR POSITIONS CONFIGURATION			
PLUG WITH KEYING OPTION "C" AND		PA66 35% GF	NATURAL
3 SHORTING BAR POSITIONS CONFIGURATION			
PLUG WITH KEYING OPTION "B" AND		PA66 35% GF	BLACK
3 SHORTING BAR POSITIONS CONFIGURATION			
PLUG WITH KEYING OPTION "A" AND		PA66 35% GF	GRAY
3 SHORTING BAR POSITIONS CONFIGURATION			
DESCRIPTION		MATERIAL	FINISH/COLOR
INVENT. : DESIGNED BY:	DWN M. FORISKA CHK M. FORISKA APVD A. VALASEK PRODUCT SPEC APPLICATION SPEC WEIGHT - -	16APR2002 16APR2002 16APR2002 NAME 24 WAY ARM, PLUG ASSEMBLY WITHOUT SHORTING BARS, CUSTOMER SPEC. SIZE CAGE CODE DRAWING NO A 1 00779 C=3-1419157-9 RESTRICTED TO -	
CUSTOMER DRAWING		SCALE 3:1	SHEET 2 OF 3 REV BK

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG M FORSKA	16APR2002		 TE Connectivity
		CHK M FORSKA	16APR2002		
DIMENSIONS: mm		APVD A VALASK	16APR2002		
		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.1 1 PLC ±0.3 2 PLC ±0.10 3 PLC ±. 4 PLC ±. ANGLES ±1°			
MATERIAL - SEE CHART ABOVE		FINISH - -		NAME 24 WAY ARM, PLUG ASSEMBLY WITHOUT SHORTING BARS, CUSTOMER SPEC.	
		APPLICATION SPEC -		SIZE A1	
		WEIGHT -		CAGE CODE 00779	
		CUSTOMER DRAWING		DRAWING NO C=3-1419157-9	
		SCALE 3:1		RESTRICTED TO -	
		SHEET 2		OF 3	
		REV BK			

PIN-OUT CHART																							
12	13	14	15	16	17	18	19	20	21	22	23	24	1-1438103-5	KEY "A"									
12	13	14	15	16	17	18	19	20	21	22	23	24	1-1438356-2	KEY "D"									
12	13	14	15	16	18	19	20	21	22	23	24	2-1438095-3	KEY "B"										
12	13	14	15	16	17	18	19	20	21	22	23	24	1-1438103-4	KEY "A"									
13	14	15	16	17	18	19	20	21	22	23	24	1438582-3	KEY "E"										
13	14	15	16	17	18	19	20	21	22	23	24	1-1438356-1	KEY "D"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438096-4	KEY "C"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438103-3	KEY "A"										
13	14	15	16	17	18	19	20	21	22	23	24	1-1438356-0	KEY "D"										
12	13	14	15	16	18	19	20	21	22	23	24	2-1438095-2	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438096-3	KEY "C"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438096-2	KEY "C"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438096-1	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1438583-3	KEY "F"										
13	14	15	16	17	18	19	20	21	22	23	24	1438583-2	KEY "F"										
13	14	15	16	17	18	19	20	21	22	23	24	1438583-1	KEY "F"										
13	14	15	16	17	18	19	20	21	22	23	24	1438582-2	KEY "E"										
13	14	15	16	17	18	19	20	21	22	23	24	1438582-1	KEY "E"										
13	14	15	16	17	18	19	20	21	22	23	24	1-1438103-2	KEY "A"										
12	13	14	15	16	18	19	20	21	22	23	24	2-1438095-1	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	2-1438095-0	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-9	KEY "B"										
13	14	15	16	17	18	19	20	21	22	23	24	1-1438103-1	KEY "A"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-8	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-7	KEY "B"										
12	13	14	15	16	17	18	19	20	21	22	23	24	1-1438103-0	KEY "A"									
13	14	15	16	17	18	19	20	21	22	23	24	2-1438103-0	KEY "A"										
13	14	15	16	17	18	19	20	21	22	23	24	1438356-9	KEY "D"										
12	13	14	15	16	18	19	20	21	22	23	24	1438356-8	KEY "D"										
12	13	14	15	16	18	19	20	21	22	23	24	1438103-9	KEY "A"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-6	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-5	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-4	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1438356-7	KEY "D"										
12	13	14	15	16	17	18	19	20	21	22	23	1438356-6	KEY "D"										
12	13	14	15	16	18	19	20	21	22	23	24	1438356-5	KEY "D"										
12	13	14	15	16	17	18	19	20	21	22	23	1438356-4	KEY "D"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-3	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-2	KEY "B"										
13	14	15	16	17	18	19	20	21	22	23	24	1438103-8	KEY "A"										
12	13	14	15	16	17	18	19	20	21	22	23	1438356-3	KEY "D"										
13	14	15	16	17	18	19	20	21	22	23	24	1-1438095-1	KEY "B"										
13	14	15	16	17	18	19	20	21	22	23	24	1-1438096-0	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1438096-9	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1438096-8	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1438096-7	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1438096-6	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1438096-5	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1438096-4	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1438096-3	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1438096-2	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1-1438095-0	KEY "B"										
13	14	15	16	17	18	19	20	21	22	23	24	1438095-9	KEY "B"										
13	14	15	16	17	18	19	20	21	22	23	24	1438095-8	KEY "B"										
13	14	15	16	17	18	19	20	21	22	23	24	1438095-7	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1438095-6	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1438095-5	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1438095-4	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1438095-3	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1438095-2	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1438356-2	KEY "D"										
12	13	14	15	16	18	19	20	21	22	23	24	1438103-7	KEY "A"										
12	13	14	15	16	18	19	20	21	22	23	24	1438103-6	KEY "A"										
13	14	15	16	17	18	19	20	21	22	23	24	1438103-5	KEY "A"										
12	13	14	15	16	18	19	20	21	22	23	24	1438103-4	KEY "A"										
13	14	15	16	17	18	19	20	21	22	23	24	1438096-5	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1438103-3	KEY "A"										
13	14	15	16	17	18	19	20	21	22	23	24	1438103-2	KEY "A"										
13	14	15	16	17	18	19	20	21	22	23	24	7-1419157-7	KEY "A"										
13	14	15	16	17	18	19	20	21	22	23	24	1438096-6	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1438103-1	KEY "A"										
13	14	15	16	17	18	19	20	21	22	23	24	1438356-1	KEY "D"										
13	14	15	16	17	18	19	20	21	22	23	24	4-1419171-1	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	4-1419171-0	KEY "B"										
13	14	15	16	17	18	19	20	21	22	23	24	3-1419171-9	KEY "A"										
12	13	14	15	16	17	18	19	20	21	22	23	24	ASSEMBLY PART NUMBER	PLUG KEYING OPTION									
HOLE POSITION																							
CAVITIES WITH A NUMERIC SYMBOL INDICATE CLOSED TERMINAL HOLE POSITIONS																							
BLANK CAVITIES INDICATE OPEN TERMINAL HOLE POSITIONS																							

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9