


Broadcast and Professional AV Solutions



**Broadcast and Audio Video
Products and Systems**

Be certain.

Table of Contents

Table of Contents	Page
This guide features Belden's most popular Broadcast and Audio/Visual products. Please visit www.belden.com or call 1.800.Belden.1 (1.800.235.3361) to learn more about our complete offering.	
Audio Solutions	3-4
Microphone Cable	3
Digital Microphone Cable	3
Analog Multi-Pair Snake Cable	3
Digital Multi-Pair Snake Cable	3
Other Digital Audio Products	4
Line Level Cable	4
Intercom/Paging/Public Address Cable	4
Speaker Cable	4
Class 1 Speaker Cable	4
Video Distribution Solutions (HD-SDI)	5
Miniature Coax Cable	5
RG-59 Coax Cable	5
RG-6 Coax Cable	5
RG-7 Coax Cable	5
RG-11 Coax Cable	5
Video Camera Solutions	6
Triax Cable	6
Electronic News Gathering (ENG) Cable	6
SMPTE311M Cable	6
Tactical Fiber Cable	6
Video Display Solutions	6-8
RGB Cable	6
S-Video Cable	6
Low Skew Cable	7
Nano Skew Patch Cords	7
HDMI Cable	7
PerfectPath™ Locking HDMI - 700 Series	7
10GX Horizontal Cable	7
CAT6+ Horizontal Cable	7
CAT5E Horizontal Cable	7
Satellite and CATV Cable	8
CCTV Cable	8
Distributed Antenna Systems (DAS) Cable	8
Video Display Accessories	8
Commercial Automation and Control Solutions	8-9
Fiber Cabling and Connectors for Automation and Control	8
AMX™ and Crestron® Control System Cable	9
DMX® System Cable	9
Cable Management Solutions	9
Free Standing Enclosures	9
2 and 4 Post Racks	9
Vertical Cable Managers	9
Wall Mount Enclosures	9

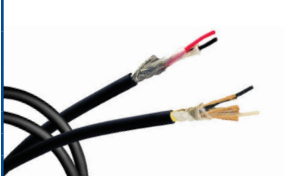
Table of Contents	Page
Networking Solutions	10
AV Multimedia Modules	10
KeyConnect Faceplates	10
Networking Solutions – 10GX (TIA/EIA Category 6A LAN)	10-11
10GX KeyConnect Modular Jacks	10
10GX KeyConnect Patch Panels	10
Category 6 Field-Installable Metal Body Ruggedized Plug	10
10GX KeyConnect Patch Panels (featuring designation strips)	10
10GX Modular Cords (Bonded-Pairs CMR)	11
10GX Category 6A Horizontal Cable	11
10GXS Small Diameter Category 6A Cable	11
10GX Pre-Terminated System	11
Networking Solutions – CAT6+ (TIA/EIA Category 6 LAN)	11-12
CAT6+ KeyConnect Modular Jacks	11
CAT6+ KeyConnect Patch Panels	11
CAT6+ KeyConnect Patch Panels (featuring designation strips)	11
CAT6+ Modular Cords (Bonded-Pairs CMR)	11
CAT6+ Horizontal Cable	12
3600 Pre-Terminated System	12
CAT6+ Shielded Cabling System	12
CAT6+ Accessories	12
Networking Solutions – CAT5E (TIA/EIA Category 5e LAN)	12-13
CAT5E KeyConnect Modular Jacks	12
CAT5E KeyConnect Patch Panels	12
CAT5E Modular Cords (Bonded-Pairs CMR)	13
CAT5E Horizontal Cable	13
CAT5E Shielded Cabling System	13
CAT5E Accessories	13
Networking Solutions – FiberExpress® System	14-16
FX Brilliance Universal Connectors	14
FX Breakout Kits	14
FX Brilliance Installation Kit	14
FX UHD Housings	14
FX UHD Shelves	14
FX UHD and FX Ultra Type-A Cassettes	14
FX UHD and FX Ultra Type-A-Alternative Cassettes	15
FX UHD and FX Ultra Frames	15
FX MPO Trunk Assemblies	15
FX Patch Cords	16
FX Color-coded Pigtail Kits	16
FX Cable	16
Broadcast Cable Assemblies	17
Part Number Index	18-19
Recommended Transmission Distance at Serial Digital Data Rates	20
Return Loss Headroom (1694A)	20

Be certain.



Audio Solutions


Microphone Cable

	Description	Belden Part Number	
		Non Plenum	
	26 AWG, Star Quad	1172A	
	24 AWG, Star Quad	1192A	
	24 AWG, 1 Pair, Braid Shield, Analog/Digital, CMR Rated	1800F	
	20 AWG, 2 Conductor, Rugged All-Rubber Construction	8412	
	20 AWG, 2 Conductor, High Strength Construction	1776	

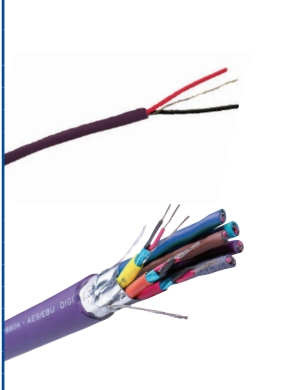
Digital Microphone Cable

	Description	Belden Part Number	
		Non Plenum	
	26 AWG, 1 Pair, Braid Shield	2221	
	24 AWG, 1 Pair, Braid Shield, Analog/Digital, CMR Rated	1800F	

Analog Multi-Pair Snake Cable


	Description	Belden Part Number			
		Non Plenum	Plenum	Banana Peel Plenum	Waterblocked
	24 AWG, 4 Pair, Individually Shielded/Jacketed, Flexible	1510C	—	—	—
	24 AWG, 6 Pair, Individually Shielded/Jacketed, Flexible	1511C	—	—	—
	24 AWG, 8 Pair, Individually Shielded/Jacketed, Flexible	1512C	—	—	—
	24 AWG, 12 Pair, Individually Shielded/Jacketed, Flexible	1513C	—	—	—
	24 AWG, 16 Pair, Individually Shielded/Jacketed, Flexible	1514C	—	—	—
	22 AWG, 2 Pair, Bonded Foil, Siamese Construction	9451D	9451DP	—	—
	22 AWG, 2 Pair, Individually Shielded/Jacketed, Install	1814R	—	—	1814WB
	22 AWG, 4 Pair, Individually Shielded/Jacketed, Install	1815R	1815P	9451PS4	1815WB
	22 AWG, 6 Pair, Individually Shielded/Jacketed, Install	1816R	1816P	9451PS6	1816WB
	22 AWG, 8 Pair, Individually Shielded/Jacketed, Install	1817R	1817P	—	1817WB
	22 AWG, 12 Pair, Individually Shielded/Jacketed, Install	1818R	1818P	—	1818WB
	22 AWG, 16 Pair, Individually Shielded/Jacketed, Install	1819R	—	—	—
	22 AWG, 20 Pair, Individually Shielded/Jacketed, Install	1820R	—	—	—
	22 AWG, 24 Pair, Individually Shielded/Jacketed, Install	1821R	—	—	—
	22 AWG, 26 Pair, Individually Shielded/Jacketed, Install	1822R	—	—	—
	22 AWG, 32 Pair, Individually Shielded/Jacketed, Install	1823R	—	—	—
	22 AWG, 2 Pair, Individually Shielded	—	6541PA	—	—
	22 AWG, 3 Pair, Individually Shielded	—	6542PA	—	—
	22 AWG, 4 Pair, Individually Shielded	—	6543PA	—	—
	22 AWG, 6 Pair, Individually Shielded	—	6545PA	—	—
	22 AWG, 8 Pair, Individually Shielded	—	6546PA	—	—
	22 AWG, 12 Pair, Individually Shielded	—	6548PA	—	—
	22 AWG, 16 Pair, Individually Shielded	—	6549PA	—	—

Digital Multi-Pair Snake Cable


	Description	Belden Part Number	
		Non Plenum	Plenum
	24 AWG, 1 Pair, Foil Shield	1800B	1801B
	24 AWG, 2 Pair, Foil Shield, Siamese Construction	1802B	1801BD
	26 AWG, 4 Pair, Individually Shielded/Jacketed Pairs	7890A	SPECIAL - Call for Details
	26 AWG, 8 Pair, Individually Shielded/Jacketed Pairs	7880A	—
	26 AWG, 12 Pair, Individually Shielded/Jacketed Pairs	7892A	—
	26 AWG, 16 Pair, Individually Shielded/Jacketed Pairs	7893A	—
	24 AWG, 2 Pair, Individually Shielded/Jacketed Pairs	1802F	—
	24 AWG, 4 Pair, Individually Shielded/Jacketed Pairs	1803F	—
	24 AWG, 4 Pair, Individually Shielded/Jacketed, Banana Peel Construction	—	1801BS4
	24 AWG, 6 pair, Individually Shielded/Jacketed, Banana Peel Construction	—	1801BS6
	24 AWG, 8 Pair, Individually Shielded/Overall Shield	1805F	—
	24 AWG, 12 Pair, Individually Shielded/Overall Shield	1806F	—
	24 AWG, 16 Pair, Individually Shielded/Overall Shield	1850F	—
	24 AWG, 24 Pair, Individually Shielded/Overall Shield	1852F	—
	24 AWG, 32 Pair, Individually Shielded/Overall Shield	1854F	—

Audio Solutions (continued)

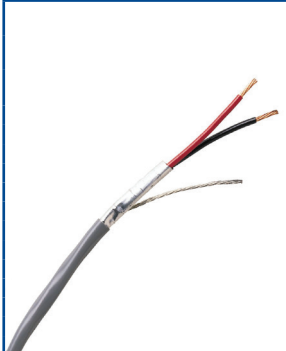
Other Digital Audio Products

	Description	Belden Part Number	
		Non Plenum	
	AES/EBU Digital Audio, 1 Pair, Category 5E, Patch		1353A
	CatSnake, 4 Pair, Category 5E, Heavy Duty		1304A
	CatSnake, 16 Pair, Category 5e, Individually and Overall Jacketed		1304A4
	CatSnake, 4 Pair, Category 5E, Heavy Duty, Flexible, Upjacketed		1305A
	Digital Audio Coax	See Video Distribution Solutions on page 5.	


Line Level Cable

	Description	Belden Part Number		
		Non Plenum	Plenum	Waterblocked
	22 AWG, 1 Pair	8451	—	—
	22 AWG, 1 Pair, Bonded Foil	9451	9451P	9451WB
	22 AWG, 2 Pair, Bonded Foil, Siamese Construction	9451D	9451DP	—
	22 AWG, 2 Pair, Individually Shielded	8723	82723	—

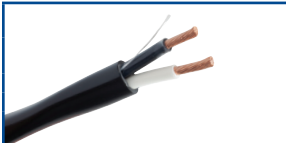
Intercom/Paging/Public Address Cable

	Description	Belden Part Number				
		Bare Copper		Tinned Copper		
		Non Plenum	Plenum	Non Plenum	Plenum	Waterblocked
	22 AWG, 1 Pair, Shielded	5500FE	6500FE	5500FH	6500FH	5500F1
	22 AWG, 1 Pair, Shielded, Foil Bonded to Jacket for Easy Stripping	—	—	—	6500PE	—
	20 AWG, 1 Pair, Shielded	5400FE	6400FE	5400FH	6400FH	—
	18 AWG, 1 Pair, Shielded	5300FE	6300FE	5300FH	6300FH	5300F1
	16 AWG, 1 Pair, Shielded	5200FE	6200FE	5200FH	6200FH	5240F1
	14 AWG, 1 Pair, Shielded	5100FE	6100FE	5100FH	6100FH	5140F1
	12 AWG, 1 Pair, Shielded	5000FE	6000FE	5000FH	6000FH	—
	22 AWG, 1 Pair, Shielded + 22 AWG, 2 Conductor	5502GE	6502GE	—	—	—
	18 AWG, 1 Pair, Shielded + 18 AWG, 2 Conductor	5302GE	—	—	—	—
	22 AWG, 4 Conductor, Shielded	5502FE	6502FE	—	—	—
	18 AWG, 4 Conductor, Shielded	5302FE	6302FE	—	—	—
	22 AWG, 2 Pair, Individually Shielded	—	—	1325R	1325A	—
	22 AWG, 3 Pair, Individually Shielded	—	—	1326R	1326A	—

Speaker Cable

	Description	Belden Part Number				
		Bare Copper		Tinned Copper		
		Non Plenum	Plenum	Non Plenum	Plenum	Waterblocked
	18 AWG, 2 Conductor, 7 strand	5300UE	6300UE	5300UH	6300UH	5300U1
	18 AWG, 4 Conductor, 7 strand	5302UE	6302UE	5302UH	6302UH	5302U1
	16 AWG, 2 Conductor, 19 strand	5200UE	6200UE	—	—	5240U1
	16 AWG, 4 Conductor, 19 strand	5202UE	6202UE	5202UH	6202UH	5202U1
	14 AWG, 2 Conductor, 19 strand	5100UE	6100UE	—	—	5140U1
	14 AWG, 4 Conductor, 19 strand	5102UE	6102UE	5102UH	6102UH	5102U1
	12 AWG, 2 Conductor, 19 strand	5000UE	6000UE	5000UH	6000UH	—
	10 AWG, 2 Conductor, 65 strand	5T00UP	6T00UP	—	—	—
	16 AWG, 2 Conductor, Oxygen-free High Conductivity, Indoor/Outdoor	1307A	—	—	—	—
	16 AWG, 4 Conductor, Oxygen-free High Conductivity, Indoor/Outdoor	1308A	—	—	—	—
	14 AWG, 2 Conductor, Oxygen-free High Conductivity, Indoor/Outdoor	1309A	—	—	—	—
	14 AWG, 4 Conductor, Oxygen-free High Conductivity, Indoor/Outdoor	1310A	—	—	—	—
	12 AWG, 2 Conductor, Oxygen-free High Conductivity, Indoor/Outdoor	1311A	—	—	—	—
	12 AWG, 4 Conductor, Oxygen-free High Conductivity, Indoor/Outdoor	1312A	—	—	—	—
	10 AWG, 2 Conductor, Oxygen-free High Conductivity, Indoor/Outdoor	1313A	—	—	—	—

Class 1 Speaker Cable

	Description	Belden Part Number		
		Non Plenum	Waterblocked	High Strand
	8 AWG Class 1 Speaker Cable	8808	8808WB	8808H
	10 AWG Class 1 Speaker Cable	8810	8810WB	8810H
	12 AWG Class 1 Speaker Cable	8812	—	—
	14 AWG Class 1 Speaker Cable	8814	—	—

Be certain.



Video Distribution Solutions (HD-SDI)

Miniature Coax Cable

Description	Belden Part Number								
	Cable	4.5 GHz Compression				4.5 GHz Crimp			
		BNC Connectors	BNC Locking	Compression Tool	Strip Tool	BNC 3 Piece	Crimp Tool	Strip Tools	Boots
SubMiniature, 28.5 AWG, Precision Video, Non Plenum	179DT	179DTBHD1	179DTBHDL	CPLCRBC-BR	PS59/6/RGB	179DTBHD3	BB3PHCT	BB3PST	SLS-RGB-*
Miniature 23 AWG Precision Video, Non Plenum and Plenum	1855A	1855ABHD1	1855ABHDL	CPLCRBC-BR	PS59/6/RGB	1855ABHD3	BB3PHCT	BB3PST	SLS-RGB-*
Miniature RG59 Precision Video, Non Plenum and Plenum	1855P	1855ABHD1	1855ABHDL	CPLCRBC-BR	PS59/6/RGB	1855ABHD3	BB3PHCT	BB3PST	SLS-RGB-*
5 Cond Miniature 23 AWG Precision Video, Non Plenum, Banana Peel	1855S5	1855ABHD1	1855ABHDL	CPLCRBC-BR	PS59/6/RGB	1855ABHD3	BB3PHCT	BB3PST	SLS-RGB-*
VideoFlex 5 Pack Snake, Non Plenum (1855A)	7789A	1855ABHD1	1855ABHDL	CPLCRBC-BR	PS59/6/RGB	1855ABHD3	BB3PHCT	BB3PST	SLS-RGB-*

* indicate color when ordering, Yellow, Red, White or Black

RG-59 Coax Cable

Description	Belden Part Number								
	Cable	4.5 GHz Compression				4.5 GHz Crimp			
		BNC Connectors	BNC Locking	Compression Tool	Strip Tool	BNC 3 Piece	Crimp Tool	Strip Tools	Boots
RG59 Precision Video, Non Plenum	1505A	1505ABHD1	1505ABHDL	CPLCRBC-BR	PSA59/6	1505ABHD3	BB3PHCT	BB3PST	SLS-59/6
RG59 Precision Video, Plenum	1506A	1506ABHD1	1506ABHDL	CPLCRBC-BR	PSA59/6	1506ABHD3	BB3PHCT	BB3PST	SLS-59/6
RG59 Precision Video, Flexible	1505F	1505ABHD1	1505ABHDL	CPLCRBC-BR	PSA59/6	1505ABHD3	BB3PHCT	BB3PST	SLS-59/6
5 Cond RG59 Precision Video, Non Plenum, Banana Peel	1505S5	1505ABHD1	1505ABHDL	CPLCRBC-BR	PSA59/6	1505ABHD3	BB3PHCT	BB3PST	SLS-59/6
VideoFlex 5 Pack Snake, Non Plenum (1505A)	7796A	1505ABHD1	1505ABHDL	CPLCRBC-BR	PSA59/6	1505ABHD3	BB3PHCT	BB3PST	SLS-59/6

RG-6 Coax Cable

Description	Belden Part Number								
	Cable	4.5 GHz Compression				4.5 GHz Crimp			
		BNC Connectors	BNC Locking	Compression Tool	Strip Tool	BNC 3 Piece	Crimp Tool	Strip Tools	Boots
RG6 Precision Video, Non Plenum	1694A	1694ABHD1	1694ABHDL	CPLCRBC-BR	PSA59/6	1694ABHD3	BB3PHCT	BB3PST	SLS-59/6
RG6 Precision Video, Plenum	1695A	1695ABHD1	1695ABHDL	CPLCRBC-BR	PSA59/6	1694ABHD3	BB3PHCT	BB3PST	SLS-59/6
RG6 Precision Video, Flexible	1694F	1694ABHD1	1694ABHDL	CPLCRBC-BR	PSA59/6	1694ABHD3	BB3PHCT	BB3PST	SLS-59/6
RG6 Precision Video, Dual Link	1694D	1694ABHD1	1694ABHDL	CPLCRBC-BR	PSA59/6	1694ABHD3	BB3PHCT	BB3PST	SLS-59/6
RG6 Precision Video, Indoor/Outdoor Waterblocked	1694WB	1694ABHD1	1694ABHDLW*	CPLCRBC-BR	PSA59/6	1694ABHD3	BB3PHCT	BB3PST	SLS-59/6
5 Pack Snake, Non Plenum (1694A), Banana Peel	1694S5	1694ABHD1	1694ABHDL	CPLCRBC-BR	PSA59/6	1694ABHD3	BB3PHCT	BB3PST	SLS-59/6
5 Pack Snake, Plenum (1695A), Banana Peel	1695S5	1695ABHD1	1695ABHDL	CPLCRBC-BR	PSA59/6	1694ABHD3	BB3PHCT	BB3PST	SLS-59/6
VideoFlex 5 Pack Snake, Non Plenum (1694A)	7712A	1694ABHD1	1694ABHDL	CPLCRBC-BR	PSA59/6	1694ABHD3	BB3PHCT	BB3PST	SLS-59/6

*Connector is also watertight.

RG-7 Coax Cable


Description	Belden Part Number			
	Cable	Connectors 4.5 Gig BNC Compression	Compression Tool	Strip Tool
RG7 Precision Video, Non Plenum	1794A	1794ABHD1	CPLCRBC1794	PS-11

RG-11 Coax Cable

Description	Belden Part Number					
	Cable	Connectors 3.0 Gig BNC Compression	BNC Compression Tool	Connectors 3.0 Gig F Compression	F Compression Tools	Strip Tool
RG11 Precision Video, Non Plenum	7731A	FSNS11QBNC	SNSUNI, CPLCCT-11BNC	716SNS1P11HQ	SNSUNI, L3011B, CPLCCT-SS59/11	PS-11
RG11 Precision Video, Plenum	7732A	FSNS11HBNCPLA	SNSUNI, CPLCCT-11BNC	716SNS1P11HPLA	SNSUNI, L3011B, CPLCCT-SS59/11	PS-11
RG 11 Precision Video, Waterblocked	7731WB	FSNS11QBNC	SNSUNI, CPLCCT-11BNC	716SNS1P11HQ	SNSUNI, L3011B, CPLCCT-SS59/11	PS-11


Video Camera Solutions

Triax Cable


	Description	Belden Part Number		
		Non Plenum	Plenum	Waterblocked
	RG59 Triax	8232, 8232A or 1856A	88232	—
	RG59 High Flex Triax	1857A	—	—
	RG11 Triax	8233A	8233P	8233WB
	RG11 High Flex Triax	1858A	1859A	—

For information about Triax Cable Assemblies, please see page 17.

Electronic News Gathering (ENG) Cable


	Description	Belden Part Number
	2 RG59 20 AWG digital coax (150A) + 4 Pair 22 AWG, Shielded, for analog audio (9451)	1347A
	RG59 ENG EFP Applications (Connectors and Tools)	1505ABHD1, CPLCRBC-BR, PSA59/6, SLS-59/6

SMPTE 311M Cable

	Description	Belden Part Number		
		Non Plenum	Plenum	Waterblocked
	Light Duty	7804LW	—	—
	12 mm Double Jacket Studio	7817A	—	—
	Outdoor Harsh Environment	7818A	—	—
	Industry Standard SMPTE 311M HDTV - (2) fiber, (2) 24 AWG, (4) 20 AWG	7804R	7804P	7804WB
	Heavy Gauge SMPTE 311M HDTV - (2) fiber, (2) 24 AWG, (2) 16 AWG	7804C	—	—
	3 Channel SMPTE Stadium Cable	7824R	7824P	7824WB
	Electrical Camera Cable	7825R	7825P	—

For information about SMPTE 311M Cable Assemblies, please see page 17.

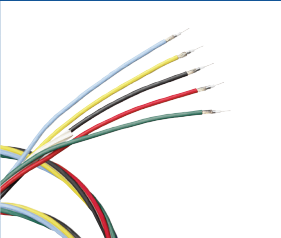
Tactical Fiber Cable

	Description	Belden Part Number	
		Singlemode	62.5/125 μm
	2 Channel *Neutrik Certified for use with OpticalCON Connectors	B96566	B96571
	4 Channel *Neutrik Certified for use with OpticalCON Connectors	B96639	B96551
	6 Channel	B96567	B96572
	8 Channel	B96568	B96573
	10 Channel	B96569	B96574
	12 Channel	B96570	B96575


For information about Tactical Fiber Cable Assemblies, please see page 17.

Video Display Solutions

RGB Cable

	Description	Belden Part Number			
		Cable	3.0 Gig BNC Compression	Compression Tool	Strip Tool
	5 Conductor Mini Hi-Res RGB, Non Plenum	1279R	FS1BNC	CPLCCT-SLM	PS59/6/RGB
	5 Conductor Mini Hi-Res RGB, Plenum	1279P	FS1BNC	CPLCCT-SLM	PS59/6/RGB
	Banana Peel 5 Conductor Mini Hi-Res RGB, Non Plenum	1281S5	FS1BNC	CPLCCT-SLM	PS59/6/RGB
	Banana Peel 5 Conductor Mini Hi-Res RGB, Plenum	1282S5	FS1BNC	CPLCCT-SLM	PS59/6/RGB
	3 Conductor Mini Hi-Res RGB, Non Plenum	1277R	FS1BNC	CPLCCT-SLM	PS59/6/RGB
	3 Conductor Mini Hi-Res RGB, Plenum	1277P	FS1BNC	CPLCCT-SLM	PS59/6/RGB
	1 Conductor, 75 Ohm Miniature Coax, Non Plenum	1281R	FS1BNC	CPLCCT-SLM	PS59/6/RGB
	1 Conductor, 75 Ohm Miniature Coax, Plenum	1281P	FS1BNC	CPLCCT-SLM	PS59/6/RGB

S-Video Cable


	Description	Belden Part Number
	S-Video Dual 30 AWG Coax Twin Parallel Flat, Non Plenum	1807A
	S-Video Dual 30 AWG Coax Twin Parallel Flat, Plenum	7700A
	S-Video Dual 30 AWG Coax Round, Non Plenum	1808A

Be certain.



Video Display Solutions (continued)


Low Skew Cable

	Description	Belden Part Number	
		Cable	RJ-45 Plugs
	Nano Skew, Non Plenum	7987R	R301602, R301601
	Nano Skew, Plenum	7987P	R301602, R301601
	Low Skew Cat 5E, Non Plenum	7988R	R301602, R301601
	Low Skew Cat 5E, Plenum	7988P	R301602, R301601


Nano Skew Patch Cords

Description	Ft	M	Belden Part Number	
			Non Plenum CMR	Plenum CMP
Nano Skew UTP/3	3	0.9	AC303569	AC303579
Nano Skew UTP/6	6	1.8	AC303570	AC303580
Nano Skew UTP/12	12	3.7	AC303571	AC303581
Nano Skew UTP/25	25	7.6	AC303572	AC303582
Nano Skew UTP/35	35	10.7	AC303573	AC303583
Nano Skew UTP/50	50	15.2	AC303574	AC303584
Nano Skew UTP/75	75	22.8	AC303575	AC303585
Nano Skew UTP/100	100	30.5	AC303576	AC303586

HDMI Cable


	Description	Belden Part Number
	HDMI Cable Assemblies, 1 Meter	HD2001
	HDMI Cable Assemblies, 2 Meter	HD2002
	HDMI Cable Assemblies, 3 Meter	HD2003
	HDMI Cable Assemblies, 4 Meter	HD2004
	HDMI Cable Assemblies, 7 Meter	HD2007

Perfect Path™ Locking HDMI - 700 Series

	Description	Belden Part Number
	High Speed Cable w/ Ethernet Channel and PerfectLock™ Connectors, 2 feet	HD-700-2
	High Speed Cable w/ Ethernet Channel and PerfectLock™ Connectors, 4 feet	HD-700-4
	High Speed Cable w/ Ethernet Channel and PerfectLock™ Connectors, 8 feet	HD-700-8
	High Speed Cable w/ Ethernet Channel and PerfectLock™ Connectors, 16 feet	HD-700-16
	High Speed Cable w/ Ethernet Channel and PerfectLock™ Connectors, 25 feet	HD-700-25
	High Speed Cable w/ Ethernet Channel and PerfectLock™ Connectors, 35 feet	HD-700-35
	High Speed Cable w/ Ethernet Channel and PerfectLock™ Connectors, 50 feet	HD-700-50


Features Perfect Lock™ locking connectors with 25lbs retention.

10GX Horizontal Cable

	Description	Belden Part Number				
		Bonded		Non-Bonded		
		Blue	White	Blue	White	Purple
	10GX Solution - CMR	10GX32 0061000	10GX32 0091000	10GX12 0061000	10GX12 0091000	10GX12 0071000
	10GX Solution - CMP	10GX33 D151000	10GX33 0091000	10GX13 D151000	10GX13 0091000	10GX13 0071000


Other colors available

CAT6+ Horizontal Cable

	Description	Bonded			Non-Bonded			
		Blue	White	Black	Blue	White	Purple	Black
	3600 Solution - CMR	3632 006A1000	3632 009A1000	3632 010A1000	3612 006A1000	3612 009A1000	3612 007A1000	3612 010A1000
	3600 Solution - CMP	3633 D15A1000	3633 009A1000	3633 010A1000	3613 D15A1000	3613 009A1000	3613 007A1000	3613 010A1000
	2400 Solution - CMR	1872A 006A1000	1872A 009A1000	1872A 010A1000	2412 006A1000	2412 009A1000	2412 007A1000	2412 010A1000
	2400 Solution - CMP	1874A D15A1000	1874A 009A1000	1874A 010A1000	2413 D15A1000	2413 009A1000	2413 007A1000	2413 010A1000

Other colors available


CAT5E Horizontal Cable

	Description	Bonded			Non-Bonded			
		Blue	White	Black	Blue	White	Purple	Black
	1200 Solution - CMR	1700A 006U1000	1700A 009U1000	1700A 010U1000	1212 006U1000	1212 009U1000	1212 007U1000	1212 010U1000
	1200 Solution - CMP	1701A D15U1000	1701A 009U1000	1701A 010U1000	1213 D15U1000	1213 009U1000	1213 007U1000	1213 010U1000

Other colors available


Video Display Solutions (continued)

Satellite and CATV Cable

	Description	Belden Part Number					
		Cable	F	RCA	BNC	Connector Tool BNC Compression	Strip Tool
	DBS/Satellite - RG-6 18 AWG Solid BC Dual Shield, Non Plenum	1829AC	FSNS6U	FSNS6RCAU	FSNS6BNCU	CPSNSCT-596 or CPLCCT-SLM	PSA59/6
	CATV - RG-6 18 AWG Solid CCS Dual Shield, Non Plenum	9116	FSNS6U	FSNS6RCAU	FSNS6BNCU	CPSNSCT-596 or CPLCCT-SLM	PSA59/6
	CATV - RG-6 18 AWG Solid CCS Dual Shield, Plenum	9116P	FSNS6PL	FSNS6RCAPL	FSNS6BNCPL	CPSNSCT-596 or CPLCCT-SLM	PSA59/6
	CATV - RG-6 18 AWG Solid CCS Quad Shield, Non Plenum	1189A	FSNS6U	FSNS6RCAU	FSNS6BNCU	CPSNSCT-596 or CPLCCT-SLM	PSA59/6
	CATV - RG-6 18 AWG Solid CCS Quad Shield, Plenum	1189AP	FSNS6PLQ	FSNS6RCAPLQ	FSNS6BNCPLQ	CPSNSCT-596 or CPLCCT-SLM	PSA59/6
	CATV - RG11 14 AWG Solid CCS Dual Shield, Non Plenum	1523A	716SNS1P11H	—	FSNS11HBNC	SNSUNI or CPLCCT-11BNC	PS-11
	CATV - RG11 14 AWG Solid CCS Dual Shield, Plenum	1523AP	716SNS1P11HPLA	—	FSNSHBNCPLA	SNSUNI or CPLCCT-11BNC	PS-11
	CATV - RG11 14 AWG Solid CCS Quad Shield, Non Plenum	7999A	—	—	—	—	—
	CATV - RG11 14 AWG Solid CCS Quad Shield, Plenum	7999AP	—	—	—	—	—

* RG11 BNC Compression Connectors to 1.0 Gig

CCTV Cable

	Description	Belden Part Number				
		Cable	Connectors F Compression	BNC Compression	Connector Tool BNC Compression	Strip Tool
	CCTV - RG59 20 AWG Solid BC 95% Braid Shield Non Plenum	543945	FSNS59U	FSNS59BNC SL	CPSNSCT-596 or CPLCCT-SLM	PSA59/6
	CCTV - RG59 20 AWG Solid BC 95% Braid Shield Plenum	643948	FSNS59PL	FSNS59BNCPL	CPSNSCT-596 or CPLCCT-SLM	PSA59/6
	CCTV - RG59 20 AWG Solid BC 95% Braid Shield + 18/2 Non Plenum	549945	FSNS59U	FSNS59BNC SL	CPSNSCT-596 or CPLCCT-SLM	PSA59/6
	CCTV - RG59 20 AWG Solid BC 95% Braid Shield + 18/2 Plenum	649948	FSNS59PL	FSNS59BNCPL	CPSNSCT-596 or CPLCCT-SLM	PSA59/6
	CCTV - RG6 18 AWG Solid BC 95% Braid Shield Non Plenum	533945	FSNS6U	FSNS6BNCU	CPSNSCT-596 or CPLCCT-SLM	PSA59/6
	CCTV - RG6 18 AWG Solid BC 95% Braid Shield Plenum	633948	FSNS6PL	FSNS6BNCPL	CPSNSCT-596 or CPLCCT-SLM	PSA59/6
	CCTV - RG6 18 AWG Solid BC 95% Braid Shield + 18/2 Non Plenum	539945	FSNS6U	FSNS6BNCU	CPSNSCT-596 or CPLCCT-SLM	PSA59/6
	CCTV - RG6 18 AWG Solid BC 95% Braid Shield + 18/2 Plenum	639948	FSNS6PL	FSNS6BNCPL	CPSNSCT-596 or CPLCCT-SLM	PSA59/6

Distributed Antenna Systems (DAS) Cable

	Description	Belden Part Number
	Wireless - RG58	8240

Video Display Accessories

	Description	Belden Part Number
	Strain Relief Boot for RGB/Mini Coax	SLS-RGB
	Strain Relief Boot for RG-59 and RG-6	SLS-59/6

Commercial Automation and Control Solutions

Fiber Cabling and Connectors for Automation and Control

Description	Belden Part Number
For use in AV control systems: 4 fiber OM4 50/125 Multi-mode breakout style cable Non plenum	B9E006
For use in AV control systems: 4 fiber OM4 50/125 Multi-mode breakout style cable Plenum	B9E014
Brilliance SC FiberExpress Connector for 900 Micron Fiber	AX105207-S1 / AX105207-B25
Precision Installation Kit (Basic Kit, Fiber Preparation Tools, Precision Cleaver and Visual Fault Locator)	AX104271
FX PATCH CORD, OM4, LC DUPLEX - LC DUPLEX, OFNR, DUPLEX ZIP 2.0 MM, A-TO-B, ERIKA VIOLET JACKET, 20 M	FP4LDD020MR2XE
FX PATCH CORD, OM4, LC DUPLEX - LC DUPLEX, OFNR, DUPLEX ZIP 2.0 MM, A-TO-B, ERIKA VIOLET JACKET, 30 M	FP4LDD030MR2XE
FX PATCH CORD, OM4, LC DUPLEX - LC DUPLEX, OFNR, DUPLEX ZIP 2.0 MM, A-TO-B, ERIKA VIOLET JACKET, 40 M	FP4LDD040MR2XE
FX PATCH CORD, OM4, LC DUPLEX - LC DUPLEX, OFNR, DUPLEX ZIP 2.0 MM, A-TO-B, ERIKA VIOLET JACKET, 50 M	FP4LDD050MR2XE
FX PATCH CORD, OM4, LC DUPLEX - LC DUPLEX, OFNR, DUPLEX ZIP 2.0 MM, A-TO-B, ERIKA VIOLET JACKET, 60 M	FP4LDD060MR2XE


Trademarks are the property of their respective owners.

Be certain.




Commercial Automation and Control Solutions (continued)

AMX™ and Crestron® Control System Cable

	Description	Belden Part Number	
		Non Plenum	Plenum
	22 AWG, 1 Shielded TC Pair (100Ω), + 18 AWG, 2 TC Conductor	1502R	1502P
	22 AWG, 1 Shielded BC Pair (100Ω), + 18 AWG, 2 BC Conductor	1392A	1392P


DMX® System Cable

	Description	Belden Part Number	
		Non Plenum	Plenum
	24 AWG, 1 Pair DMX Cable	9841	82841
	22 AWG, 1 Pair DMX Cable	3105A	—
	24 AWG, 2 Pair DMX Cable	9842	82842
	22 AWG, 2 Pair DMX Cable	3107A	—


For DMX on Ethernet, see pages 10-13 for networking, or visit Belden.com to download a dedicated Lighting Cable catalog.

Cable Management Solutions

Free Standing Enclosures


	Description (H x W x D)	Model	RU'S	Width (in)	Depth (in)	Belden Part Number	
						Non Plenum	Plenum
	84" x 29" x 30" Black, 19" MTG, Vented top, Perf front & rear w/sides	XST	25, 39, 42, 45	29	30	XST84-3-154420	
	84" x 29" x 34" Black, 19" MTG, Vented top, Perf front & rear w/sides	XDP	25, 39, 42, 45	29	34	XDP84-3-154420	
	47u" x 19.9" x 24" Black, 19" MTG, Frame Only	XSF	10-48	19	36	XSF47-24-100000	
	45u" x 22" x 24" Black, 19" MTG, Vented top, Vented front and rear, flush mount sides	XMF	11-57	22	24, 30, 36, 40	XMF45241222200	
	44u" x 22" x 26" Black, 19" MTG, Vented top, Solid rear, sides	XME	24-44	22	20, 26.5	XME442620210	
	44u" x 22" x 36" Black, 19" MTG, Vented top, Perf front, perf rear, sides	XMER	24-44	22	26.5, 31.5, 36	XMER4436233200	

2 and 4 Post Racks

	Description (H x W x D)	Model	RU	Width (in)	Depth (in)	Screw	Type	Belden Part Number
								Belden Part Number
	84" x 19" x 3" Channel Knock down	BHRR	45	19	—	12-24	Alum	BHRR194
	84" x 19" x 6" Channel Knock down	BHRR	45	19	—	12-24	Alum	BHRR6194
	84" x 23" x 3" Channel Knock down	BHRR	45	23	—	12-24	Alum	BHRR234
	84" x 19" x 3" Channel Knock down	XDR	44	19	—	12-24	Steel	XDR8419-312
	84" x 19" x 3" Channel Knock down	XDR	44	19	—	10-32	Steel	XDR8419-310
	84" x 19" x 3" Channel Welded	XDR	44	19	—	10/12	Steel	XDR8419-310W
	84" x 23" x 3" Channel Welded	XDR	44	23	—	10/12	Steel	XDR8423-31XW
	84" x 19" x 6" Channel Seismic	XDR	44	19	—	10-32	Steel	XDRS8419-610
	84" x 19" x 3" Channel 4 Post Knock down	XDR	44	19	24, 28, 32, 36	10/12	Steel	XDR8419-3#XXX
	84" x 23" x 3" Channel 4 Post Knock down	XDR	44	23	24, 28, 32, 36	10/12	Steel	XDR8423-31#XX


= Screw Size Variable 0=10-32, 2=12-24 Screw, Depth 24, 28, 32, 36

Vertical Cable Managers

	Description	Model	Width (in)	Depth (in)	Belden Part Number
					Belden Part Number
	Single Sided Vertical organizer low density	BHVL	3.6, 6, 10, 12	8.75	BHVLOXX
	Single sided Vertical organizer high density	BHVH	3.6, 6, 10, 12	8.75	BHVHOXX
	Double sided Vertical organizer high/low density	BHVHL	3.6, 6, 10, 12	17.37	BHVHLXX
	Double sided Vertical organizer high/high density	BHVHH	3.6, 6, 10, 12	17.37	BHVHHXX

X = Width Variable 03=3.6", 06=6", 10=10", 12=12"

Wall Mount Enclosures


	Description (H x W)	Model	RU	Width (in)	Depth (in)	Belden Part Number
						Belden Part Number
	24" x 19" Black Wall mount w/glass door	XWM	12	19	20, 24	XWM-24XX-GD-3
	24" x 19" Black Wall mount w/steel door	XWM	12	19	20, 24	XWM-24XX-SD-3
	36" x 19" Black Wall mount w/glass door	XWM	18	19	20, 24	XWM-36XX-GD-3
	36" x 19" Black Wall mount w/steel door	XWM	18	19	20, 24	XWM-36XX-SD-3
	48" x 19" Black Wall mount w/glass door	XWM	25	19	20, 24	XWM-48XX-GD-3
	48" x 19" Black Wall mount w/steel door	XWM	25	19	20, 24	XWM-48XX-SD-3

Depth Variable 20=20", 24=24"


Consult Belden Cable Management Catalog to access enclosure configuration matrix and accessories listing. NEMA compliant enclosures also available.

Networking Solutions

AV Multimedia Modules

	Description	Belden Part Number		
		Almond	Elec. White	Black
	3.5mm Audio Coupler, F/F, Gold	AX105334-AL	AX105334-EW	AX105334-BK
	3.5mm Audio Coupler, F/Solder, Gold	AX105335-AL	AX105335-EW	AX105335-BK
	S-video Coupler, F/F	AX105336-AL	AX105336-EW	AX105336-BK
	RCA Gold-plated Coupler, F/F, Red	AX105337-AL	AX105337-EW	AX105337-BK
	RCA Gold-plated Coupler, F/F, White	AX105338-AL	AX105338-EW	AX105338-BK
	RCA Gold-plated Coupler, F/F, Yellow	AX105339-AL	AX105339-EW	AX105339-BK
	RCA Gold-plated Coupler, F/F, Green	AX105340-AL	AX105340-EW	AX105340-BK
	RCA Gold-plated Coupler, F/F, Blue	AX105341-AL	AX105341-EW	AX105341-BK
	Video F Coax 3GHz, Recessed, Gold-Plated	AX105346-AL	AX105346-EW	AX105346-BK
	Video F Coax, Recessed	AX102903	AX102904	AX102905
	Video F Coax, Flush	AX102906	AX102907	AX102908
	Video BNC Coax, Flush	AX104573	AX104575	AX104574
	USB 3.0 Coupler, A to A	AX105342-AL	AX105342-EW	AX105342-BK
	USB 2.0 Coupler, B to B	AX105344-AL	AX105344-EW	AX105344-BK
HDMI Coupler (Version 1.4)	AX105345-AL	AX105345-EW	AX105345-BK	

KeyConnect Faceplates

	Description	Belden Part Number		
		Elec. White*	Stainless Steel*	Stainless Steel**
	1-Port, Single Gang	AX102660	—	AX102006
	2-Port, Single Gang	AX102655	AX104231	AX102007
	4-Port, Single Gang	AX102249	AX104232	AX102009
	6-Port, Single Gang	AX102251	AX104233	AX102010
	4-Port, Double Gang	—	AX104479	AX102011
	6-Port, Double Gang	AX102671	AX104480	AX102012
	Wall Mount Phone Plates	—	—	AX102005
	Single-gang Back Box, 1.89 in.	AX102657	—	—
	Double-gang Back Box, 1.89 in.	AX104131	—	—

Other configurations (i.e. numbers of ports) available; * With ID window; ** Without ID window


Networking Solutions – 10GX (TIA/EIA Category 6A LAN)

10GX KeyConnect Modular Jacks

	Color	Belden Part Number
	White	AX102282
	Black	AX102283
	Red	AX104153
	Blue	AX104156
	Purple	AX104157


A broad range of dark and pastel colors are also available

10GX KeyConnect Patch Panels


	Description	Belden Part Number
	KeyConnect, 24-Port, 1U*	AX103254
	KeyConnect, 48-Port, 2U*	AX103256
	AngleFlex, 24-Port, 1U**	AX103248
	AngleFlex, 48-Port, 2U**	AX103249
	KeyConnect, 24-Port, 1U**	AX103114
	KeyConnect, 48-Port, 1U**	AX103121
KeyConnect, 48-Port, 2U**	AX103115	

* Preloaded (Titanium); ** Modular patch panels

Category 6 Field-Installable Metal Body Ruggedized Plug

	Description	Belden Part Number
	DataTuff® Industrial Ethernet Ruggedized Modular Plug Kit UTP/STP, T568A	R301601
	DataTuff® Industrial Ethernet Ruggedized Modular Plug Kit UTP/STP, T568B	R301602

10GX KeyConnect Patch Panels (featuring designation strips)


	Description	Belden Part Number
	10GX KeyConnect Patch Panel featuring designation strips, 24-port, 1U, Black	AX105152
	10GX KeyConnect Patch Panel featuring designation strips, 48-port, 2U, Black	AX105153

Be certain.




Networking Solutions – 10GX (TIA/EIA Category 6A LAN) (continued)

10GX Modular Cords (Bonded-Pairs CMR)

	Description	Belden Part Number			
		Black	Blue	Purple	White
	2 ft. (0.6 m)	CA21100002	CA21106002	CA21107002	CA21109002
	4 ft. (1.2 m)	CA21100004	CA21106004	CA21107004	CA21109004
	7 ft. (2.1 m)	CA21100007	CA21106007	CA21107007	CA21109007
	10 ft. (3.0 m)	CA21100010	CA21106010	CA21107010	CA21109010
	15 ft. (4.6 m)	CA21100015	CA21106015	CA21107015	CA21109015


Other lengths and colors available

10GX Category 6A Horizontal Cable

	Description	Belden Part Number				
		Bonded		Non-Bonded		
		Blue	White	Blue	White	Purple
	10GX Solution - CMR	10GX32 0061000	10GX32 0091000	10GX12 0061000	10GX12 0091000	10GX12 0071000
	10GX Solution - CMP	10GX33 D151000	10GX33 0091000	10GX13 D151000	10GX13 0091000	10GX13 0071000


Other Colors and Reel-in-Box Available

10GXS Small Diameter Category 6A Horizontal Cable

	Description	Belden Part Number				
		Bonded (Available June 2015)		Non-Bonded		
		Blue	White	Blue	White	Purple
	10GX Solution - CMR	10GXS32 0061000	10GXS32 0091000	10GXS12 0061000	10GXS12 0091000	10GXS12 0071000
	10GX Solution - CMP	10GXS33 D151000	10GXS33 0091000	10GXS13 D151000	10GXS13 0091000	10GXS13 0071000

Other Colors and Reel-in-Box Available

10GX Pre-Terminated System

	Cable Assembly*		KeyConnect Coupler Patch Panel (Preloaded)		Modular Coupler	
	CMR, Black	CA21100xxxA06	24-port, 1U, Titanium	AX104141	Black	AX104024
CMP, Black	CA22100xxxA06	48-port, 2U, Titanium	AX104142			

* Use xxx to specify length in feet—006-050 ft in increments of 1 ft—055-265 ft in increments of 5 ft


Networking Solutions – CAT6+ (TIA/EIA Category 6 LAN)

CAT6+ KeyConnect Modular Jacks

	Color	Belden Part Number
	White	AX101320
	Black	AX101321
	Red	AX104190
	Blue	AX104193
	Purple	AX104194


A broad range of dark and pastel colors are also available

CAT6+ KeyConnect Patch Panels


	Description	Belden Part Number
	KeyConnect, 24-Port, 1U*	AX103253
	KeyConnect, 48-Port, 2U*	AX103255
	AngleFlex, 24-Port, 1U**	AX103248
	AngleFlex, 48-Port, 2U**	AX103249
	KeyConnect, 24-Port, 1U**	AX103114
	KeyConnect, 48-Port, 1U**	AX103121
	KeyConnect, 48-Port, 2U**	AX103115

* Preloaded; ** Modular patch panels

CAT6+ KeyConnect Patch Panels (featuring designation strips)

	Description	Belden Part Number
	CAT6+ KeyConnect Patch Panels featuring designation strips, 24-port, 1U, Black	AX105156
	CAT6+ KeyConnect Patch Panels featuring designation strips, 48-port, 2U, Black	AX105157

CAT6+ Modular Cords (Bonded-Pairs CMR)

	Description	Belden Part Number			
		Black	Blue	Purple	White
	2 ft. (0.6 m)	C601100002	C601106002	C601107002	C601109002
	4 ft. (1.2 m)	C601100004	C601106004	C601107004	C601109004
	7 ft. (2.1 m)	C601100007	C601106007	C601107007	C601109007
	10 ft. (3.0 m)	C601100010	C601106010	C601107010	C601109010
	15 ft. (4.6 m)	C601100015	C601106015	C601107015	C601109015

Other lengths and colors available

Networking Solutions – CAT6+ (TIA/EIA Category 6 LAN) (continued)

CAT6+ Horizontal Cable

Description	Bonded			Non-Bonded			
	Blue	White	Black	Blue	White	Purple	Black
3600 Solution - CMR	3632 006A1000	3632 009A1000	3632 010A1000	3612 006A1000	3612 009A1000	3612 007A1000	3612 010A1000
3600 Solution - CMP	3633 D15A1000	3633 009A1000	3633 010A1000	3613 D15A1000	3613 009A1000	3613 007A1000	3613 010A1000
2400 Solution - CMR	1872A 006A1000	1872A 009A1000	1872A 010A1000	2412 006A1000	2412 009A1000	2412 007A1000	2412 010A1000
2400 Solution - CMP	1874A D15A1000	1874A 009A1000	1874A 010A1000	2413 D15A1000	2413 009A1000	2413 007A1000	2413 010A1000
Indoor/Outdoor Category 6 (CMR/CMX)	—	—	7940A	—	—	—	—
Indoor/Outdoor Category 6 Shielded (CMR/CMX)	—	—	7953A	—	—	—	—

Other colors available

3600 Pre-Terminated System

Cable Assembly*	KeyConnect Coupler Patch Panel (Preloaded)	Modular Coupler
CMR, Black C601106xxxA06	24-port, 1U, Titanium AX104227	Black AX104215
CMP, Black C602106xxxA06	48-port, 2U, Titanium AX104228	

* Use xxx to specify length in feet—006-050 ft in increments of 1 ft—055-265 ft in increments of 5 ft

CAT6+ Shielded Cabling System

Description	Belden Part Number				
	Blue	Gray	White	Black	Metallic
Belden DataTwist 2400, F/UTP, Non Plenum	1351A 0061000	1351A 0081000	1351A 0091000	—	—
Belden DataTwist 2400, F/UTP, Plenum	1352A 0061000	1352A 0081000	1352A 0091000	—	—
Shielded Modular Jack, Metallic	—	—	—	—	AX104596
Shielded Modular Patch Panel, 24-Port, 1U, Titanium (empty)	—	—	—	—	AX104563
Shielded Modular Patch Panel, 48-Port, 2U, Titanium (empty)	—	—	—	—	AX104564
2 ft (.6m), Shielded Patch Cord, 4-Pair, T568A/B-T568A/B, Non Plenum	C6F1106002	C6F1108002	C6F1109002	C6F1100002	—
4 ft (1.2m), Shielded Patch Cord, 4-Pair, T568A/B-T568A/B, Non Plenum	C6F1106004	C6F1108004	C6F1109004	C6F1100004	—
7 ft (2.1m), Shielded Patch Cord, 4-Pair, T568A/B-T568A/B, Non Plenum	C6F1106007	C6F1108007	C6F1109007	C6F1100007	—
15 ft (4.6m), Shielded Patch Cord, 4-Pair, T568A/B-T568A/B, Non Plenum	C6F1106015	C6F1108015	C6F1109015	C6F1100015	—
25 ft (7.6m), Shielded Patch Cord, 4-Pair, T568A/B-T568A/B, Non Plenum	C6F1106025	C6F1108025	C6F1109025	C6F1100025	—
15 ft (4.6m), Shielded Pigtailed, 4-Pair, T568B-Open, Non Plenum	C6F1306015	C6F1308015	—	—	—
25 ft (7.6m), Shielded Pigtailed, 4-Pair, T568B-Open, Non Plenum	C6F1306025	C6F1308025	—	—	—

CAT6+ Accessories

Description	Belden Part Number
Connecting Tool	AX100749
Termination Station	AX101852
Release Tool	AX101185
Cable Preparation Tool	1797B
Patch Cord Tool	AX102775

Description	Belden Part Number
Velcro Cable Ties, 25 Per Roll, Black, 8 in	AX100783
Velcro Cable Ties, 25 Per Roll, Black, 12 in	AX100784
Wrap-Around Labels, Gray, 48 Labels/Sheet (25 sheets per pack)	AX101555

Networking Solutions – CAT5E (TIA/EIA Category 5e LAN)

CAT5E KeyConnect Modular Jacks

Color	Belden Part Number
White	AX101309
Black	AX101310
Red	AX104183
Blue	AX104186
Purple	AX104187

A broad range of dark and pastel colors are also available

CAT5E KeyConnect Patch Panels

Description	Belden Part Number
HD-110, 24-Port, 1U*	AX103258
HD-110, 48-Port, 2U*	AX103259
AngleFlex, 24-Port, 1U**	AX103248
AngleFlex, 48-Port, 2U**	AX103249
KeyConnect, 24-Port, 1U**	AX103114
KeyConnect, 48-Port, 1U**	AX103121
KeyConnect, 48-Port, 2U**	AX103115

*Preloaded; **Modular patch panels

Be certain.



Networking Solutions – CAT5E (TIA/EIA Category 5e LAN) (continued)

CAT5E Modular Cords (Bonded-Pairs CMR)

Description	Belden Part Number			
	Black	Blue	Purple	White
2 ft. (0.6 m)	C501100002	C501106002	C501107002	C501109002
4 ft. (1.2 m)	C501100004	C501106004	C501107004	C501109004
7 ft. (2.1 m)	C501100007	C501106007	C501107007	C501109007
10 ft. (3.0 m)	C501100010	C501106010	C501107010	C501109010
15 ft. (4.6 m)	C501100015	C501106015	C501107015	C501109015

Other lengths and colors available

CAT5E Horizontal Cable

Description	Bonded			Non-Bonded			
	Blue	White	Black	Blue	White	Purple	Black
1200 Solution - CMR	1700A 006U1000	1700A 009U1000	1700A 010U1000	1212 006U1000	1212 009U1000	1212 007U1000	1212 010U1000
1200 Solution - CMP	1701A D15U1000	1701A 009U1000	1701A 010U1000	1213 D15U1000	1213 009U1000	1213 007U1000	1213 010U1000
Indoor/Outdoor Category 5e (CMR/CMX)	—	—	7918A	—	1594A	—	7923A
Indoor/Outdoor Category 5e (Waterblocked)	—	—	—	—	—	—	7934A
Indoor/Outdoor Category 5e Shielded (CMR/CMX)	—	—	—	—	—	—	7919A
Indoor/Outdoor Category 5e Shielded (Waterblocked)	—	—	—	—	—	—	7937A
Indoor/Outdoor Tactical Category 5e (Heavy Duty Jacket)	—	—	1304A	—	—	—	—
4 Channel CatSnake Tactical Category 5e (16 pairs total)	—	—	1304A4	—	—	—	—
Indoor/Outdoor Tactical Category 5e (Upjacketed)	—	—	1305A	—	—	—	—
1 Pair Category 5e	1353A 006U1000	1353A 009U1000	1353A 010U1000	—	—	—	—

Other colors available

CAT5E Shielded Cabling System


Description	Blue	Gray	White	Black	Metallic
	Belden DataTwist 1200, F/UTP, Non Plenum	1212F 0061000	1212F 0081000	1212F 0091000	1212F 0101000
Belden DataTwist 1200, F/UTP, Plenum	1213F 0061000	1213F 0081000	1213F 0091000	1213F 0101000	—
Shielded Modular Jack, Metallic	—	—	—	—	AX104595
Shielded Modular Patch Panel, 24-Port, 1U, Titanium (empty)	—	—	—	—	AX104563
Shielded Modular Patch Panel, 48-Port, 2U, Titanium (empty)	—	—	—	—	AX104564
2 ft (6m), Shielded Patch Cord, 4-Pair, T568A/B-T568A/B, Non Plenum	C5F1106002	C5F1108002	C5F1109002	C5F1100002	—
4 ft (1.2m), Shielded Patch Cord, 4-Pair, T568A/B-T568A/B, Non Plenum	C5F1106004	C5F1108004	C5F1109004	C5F1100004	—
7 ft (2.1m), Shielded Patch Cord, 4-Pair, T568A/B-T568A/B, Non Plenum	C5F1106007	C5F1108007	C5F1109007	C5F1100007	—
15 ft (4.6m), Shielded Patch Cord, 4-Pair, T568A/B-T568A/B, Non Plenum	C5F1106015	C5F1108015	C5F1109015	C5F1100015	—
25 ft (7.6m), Shielded Patch Cord, 4-Pair, T568A/B-T568A/B, Non Plenum	C5F1106025	C5F1108025	C5F1109025	C5F1100025	—
15 ft (4.6m), Shielded Pigtailed, 4-Pair, T568B-Open, Non Plenum	C5F1306015	C5F1308015	—	—	—
25 ft (7.6m), Shielded Pigtailed, 4-Pair, T568B-Open, Non Plenum	C5F1306025	C5F1308025	—	—	—

CAT5E Accessories

Description	Belden Part Number	Description	Belden Part Number
Connecting Tool	AX100749	Velcro Cable Ties, 25 Per Roll, Black, 8 in	AX100783
Termination Station	AX101852	Velcro Cable Ties, 25 Per Roll, Black, 12 in	AX100784
Release Tool	AX101185	Wrap-Around Labels, Gray, 48 Labels/Sheet (25 sheets per pack)	AX101555
Cable Preparation Tool	1797B		
Patch Cord Tool	AX102775		


Networking Solutions – FiberExpress System

FX Brilliance Universal Connectors

	Description		Belden Part Number		
			Multimode, OM1	Multimode, OM3/OM4 - Aqua	Multimode, OM4 - Erika Violet
	LC with 900 µm Boot, 25 per package		AX105200-B25	AX105202-B25	AX105252-B25
	SC with 900 µm Boot, 25 per package		AX105205-B25	AX105207-B25	AX105253-B25
ST with 900 µm Boot, 25 per package		AX105210-B25	AX105212-B25	AX105254-B25	
		Belden Part Number			
Description		Singlemode, OS2	Singlemode, OS2/APC		
LC with 900 µm Boot		AX105203-B25	-		
SC with 900 µm Boot		AX105208-B25	AX105209-B25		
ST with 900 µm Boot		AX105213-B25	-		

FX Brilliance Universal includes a boot for 900 µm Tight Buffered fiber. Boots for 2 mm/3 mm Jacketed fiber are sold separately. Replace -B25 with -S1 for sample 1 per package.


FX Breakout Kits

	Description	Belden Part Number
	Breakout Kit for 2.0 mm Subunits, 6-fiber, 1-Pack	AX101100
	Breakout Kit for 3.0 mm Subunits, 12-fiber, 1-Pack	AX101101
	Breakout kit for 5.2 mm Subunits (Central Tube), 6-fiber, 1-Pack	AX104695
	Breakout kit for 5.2 mm Subunits (Central Tube), 12-fiber, 1-Pack	AX104696


FX Brilliance Installation Kit

	Description	Belden Part Number
	Precision Installation Kit (Basic Kit, Fiber Preparation Tools, Precision Cleaver and Visual Fault Locator)	AX104271

FX UHD Housings


	Description	Number of Module Bays	Total LC Duplex/ MPO Ports using FX Ultra Frames and Cassettes	Total LC Duplex/ MPO Ports using FX UHD Frames and Cassettes	Belden Part Number	
					Titanium	Black
	1U Housing with Front and Rear Cable Tray	4	48	72	AX104681	AX105563
	4U Housing with Front and Rear Cable Tray	16	192	288	AX104683	AX105565
	4U 23" Housing with Front and Rear Cable Tray	20	240	360	AX105379	-
	Optional 1U Splice Housing Kit, 144 splices (add up to 4 on the 4U Housing) ¹	N/A	N/A	N/A	AX104684	AX105678
Optional Patch Cord Tray Cover, 19in ²	N/A	N/A	N/A	AX105162	-	

FX UHD Shelves

	Description	Number of Module Bays	Total LC Duplex/ MPO Ports using FX Ultra Frames and Cassettes	Total LC Duplex/ MPO Ports using FX UHD Frames and Cassettes	Belden Part Number	
					Titanium	Black
	1U Standard Fixed Shelf	4	48	72	AX105164	AX105673
	1U Recessed Fixed Shelf	4	48	72	AX105165	AX105674
	4U Standard Fixed Shelf	10	120	180	AX105166	AX105675
4U Recessed Fixed Shelf	10	120	180	AX105167	AX105676	

See the FX UHD System Product Bulletin (PB500) for further options

FX UHD and FX Ultra Type-A Cassettes

	Description			Belden Part Number					
	Patch Ports (fibers)	Trunk Ports	Family	OM1 Beige Adapters	OM3 Aqua Adapters	OM4 Erika Violet Adapters	OS2 Blue Adapters	SM/APC Green Adapters	
	LC Duplex to MPO-12(f)								
	18 (36)	3	FX UHD*	-	FC3H18LDMF	FC4H18LDMF	FCSH18LDMF	FCSH18LAMF	
	12 (24)	2	FX Ultra	FC1U12LDMF	FC3U12LDMF	FC4U12LDMF	FCSU12LDMF	FCSU12LAMF	
	SC Duplex to MPO-12(f)								
	6 (12)	1	FX Ultra	FC1U06SDMF	FC3U06SDMF	FC4U06SDMF	FCSU06SDMF	FCSU06SAMF	
	SC Simplex to MPO-12(f)								
	12 (12)	1	FX Ultra	-	-	-	FCSU12SCMF	FCSU12SBMF	

¹Optional HD Patch cord release tool AX104685

Be certain.



Networking Solutions – FiberExpress System (continued)

FX UHD and FX Ultra Type-A-Alternate Cassettes*

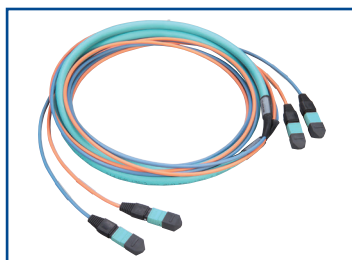
Patch Ports (fibers)	Description		Belden Part Number				
	Trunk Ports	Family	OM1 Beige Adapters	OM3 Aqua Adapters	OM4 Erika Violet Adapters	OS2 Blue Adapters	SM/APC Green Adapters
LC Duplex to MPO-12(f)							
18 (36)	3	FX UHD*	-	FC3H18LDMF1A	FC4H18LDMF1E	FCSH18LDMF1B	FCSH18LAMF1G
12 (24)	2	FX Ultra	FC1U12LDMF1K	FC3U12LDMF1A	FC4U12LDMF1E	FCSU12LDMF1B	FCSU12LAMF1G
SC Duplex to MPO-12(f)							
6 (12)	1	FX Ultra	FC1U06SDMF1T	FC3U06SDMF1A	FC4U06SDMF1E	FCSU06SDMF1B	FCSU06SAMF1G
SC Simplex to MPO-12(f)							
12 (12)	1	FX Ultra	-	-	-	FCSU12SCMF1B	FCSU12SBMF1G

* In order to maintain proper port numbering within a 10G installation AND chart your path to 40G and beyond, please refer to our Fiber Optic Catalog that outlines when and where to use Type-A-Alternate Cassettes, as well as the process for migrating to 40G.

FX UHD and FX Ultra Frames

Patch Ports (fibers)	Description		Belden Part Number			
	Family	OM1 Beige Adapters	OM3 Aqua Adapters	OM4 Erika Violet Adapters	SM Blue Adapters	SM/APC Green Adapters
MPO Type-A (Key-Up/Key-Down)						
18	FX UHD	-	FF3H18MP	FF4H18MP	-	FFSH18MP
12	FX Ultra	-	FF3U12MP	FF4U12MP	-	FFSU12MP
LC Duplex						
18 (36)	FX UHD	-	FF3H18LD	FF4H18LD	FFSH18LD	FFSH18LA
12 (24)	FX Ultra	FF1U12LD	FF3U12LD	FF4U12LD	FFSU12LD	FFSU12LA
SC Duplex						
6 (12)	FX Ultra	FF1U06SD	FF3U06SD	FF4U06SD	FFSU06SD	FFSU06SA
SC Simplex						
12 (12)	FX Ultra	-	-	-	FFSU12SC	FFSU12SB
ST						
12 (12), Metal	FX Ultra	FFSU12ST				-

FX MPO Trunk Assemblies



Building a SmartPart Number

Fixed Series	1. Choose Fiber Type	2. Choose Connectors	3. Choose Connector Gender	4. Choose Polarity (outside)	5. Choose Connector Count (per side)	6. Choose Length
FM	4	M	M	B	2	025M
Fiber Type	Connectors	Connector Gender		Polarity (outside)	Connector Count	Length
3 OM3	M MPO-12	M Male to Male	E Extension (M to F)	A Type-A	1 12 Fiber	005M to 350M (use M as decimal)
4 OM4				B Type-B	2 24 Fiber	
S OS2				C Type-C	D 144 Fiber	

Examples:

FM4MMB2025M : FX MPO TRUNK, OM4, MPO-12(MALE TO MALE), TYPE-B, 2 MPO (24 FIBERS), 25 M, OFNP, MINI-DISTRIBUTION (3.0MM SUB-UNITS), FAN-OUT: 0.5M x IN-LINE, ERIKA VIOLET JACKET

FMSMEBD17M5: FX MPO TRUNK, OS2, MPO-12(MALE TO FEMALE), TYPE-B, 12 MPO (144 FIBERS), 17.5 M, OFNP, MINI-DISTRIBUTION (3.0MM SUB-UNITS), FAN-OUT: 0.5M x IN-LINE, YELLOW JACKET

Networking Solutions – FiberExpress System (continued)

Standard FX Patch Cords

Length (m)	OM1	OM3	OM4	OS2	OS2/APC
	Beige	Aqua	Erika Violet	Blue	Green
MPO-12(f) to MPO-12(f)					
2	–	FP3MFMF002M	FP4MFMF002M	–	FPSMFMF002M
3	–	FP3MFMF003M	FP4MFMF003M	–	FPSMFMF003M
5	–	FP3MFMF005M	FP4MFMF005M	–	FPSMFMF005M
LC Duplex to LC Duplex					
2	–	FP3LDLD002M	FP4LDLD002M	FPSLDLD002M	FPSLALA002M
3	–	FP3LDLD003M	FP4LDLD003M	FPSLDLD003M	FPSLALA003M
5	–	FP3LDLD005M	FP4LDLD005M	FPSLDLD005M	FPSLALA005M
SC Duplex to SC Duplex					
2	FP1SDSD002M	FP3SDSD002M	FP4SDSD002M	FPSSSD002M	FPSSASA002M
3	FP1SDSD003M	FP3SDSD003M	FP4SDSD003M	FPSSSD003M	FPSSASA003M
5	FP1SDSD005M	FP3SDSD005M	FP4SDSD005M	FPSSSD005M	FPSSASA005M
ST to ST (Duplex Cord)					
2	FP1STST002M	FP3STST002M	FP4STST002M	FPSSTST002M	–
3	FP1STST003M	FP3STST003M	FP4STST003M	FPSSTST003M	–
5	FP1STST005M	FP3STST005M	FP4STST005M	FPSSTST005M	–
Hybrid: LC Duplex to SC Duplex					
3	FP1LSD003M	FP3LSD003M	FP4LSD003M	FPSLSD003M	FPSLASA003M
Hybrid: SC Duplex to ST					
3	FP1SDST003M	FP3SDST003M	–	FPSSDST003M	–

FX Color-coded Pigtail Kits (900 µm)

Description	Belden Part Number				
	OM1	OM3	OM4	OS2	SM/APC
LC	–	FT3LC900PR12	FT4LC900PR12	FTSLC900PR12	FTSLB900PR12
SC	FT1SC900PR12	FT3SC900PR12	FT4SC900PR12	FTSSC900PR12	FTSSB900PR12
ST	FT1ST900PR12	FT3ST900PR12	–	FTSST900PR12	–

Standard Color-coded Pigtail Kits contain 12 color-coded 900 µm fibers, 2 m in length.

FX Cable

Description			Belden Part Number						
			2 fibers	6 fibers	12 fibers	24 fibers	48 fibers	96 fibers	144 fibers
Indoor	Interconnect	Riser	B96915	–	–	–	–	–	–
		Plenum	B96919	–	–	–	–	–	–
Indoor	Distribution Tight buffer	Riser	B9X037	B9X039	B9X042	B9X601	B9X606	B9X622	B9X619
		Plenum	B9X043	B9X045	B9X048	B9X611	B9X616	B9X623	B9X621
	Breakout 2.0mm units	Riser	B9X005	B9X007	B9X010	B9X012	–	–	–
		Plenum	B9X013	B9X015	B9X018	B9X020	–	–	–
Indoor / Outdoor	Interlocked Armor Dist.	Riser	–	B9X230	B9X231	B9X232	B9X235	B9X237	B9X238
		Plenum	–	B9X240	B9X241	B9X242	B9X245	B9X247	B9X248
Outdoor	Loose Tube	Riser	–	B9X510T	B9X511T	B9X500T	B9X505T	B9X513T	B9X509T
Indoor / Outdoor	Distribution Tight Buffer	Riser	B9X037T	B9X039T	B9X042T	B9X601T	B9X606T	–	–
		Plenum	B9X043T	B9X045T	B9X048T	B9X611T	B9X616T	–	–
	Loose Tube	Riser	–	B9X810	B9X811	B9X812	B9X814	B9X816	B9X817
		Plenum	–	B9X202	B9X204	B9X205	B9X207	B9X211	B9X215

Other Fiber Counts are available; See our full line up in our Belden Optical Fiber Catalog

Where X is replaced by:

OM1	OM2	OM3	OM4	Single-mode
B	A	C	E	W

Other connector and adapter types are available

Other patch cord combinations and lengths are available

Be certain.



Broadcast Cable Assemblies

Belden is continuing to build on its reputation as the solutions provider for the Broadcast and Pro AV markets, with the addition of pre-terminated, custom made, cable assemblies to its solutions portfolio. Belden is now able to offer a wide range of cable assemblies in custom lengths using SMPTE, Tactical Fiber, Coax, Triax, and Audio cables and industry leading connector brands, in cable assemblies with the same superior quality that you have come to expect from Belden. All assemblies are manufactured to Belden's strict quality standards and undergo rigorous testing to ensure that your signal is transmitted flawlessly and safely.

Some of the cable and connector choices include, but are not limited to the list to the right.

Assembly configurators have been developed to help our customers navigate the breadth of cable and connector alternatives offered and to simplify the process of "building" assemblies that fit their particular installation requirements.



Broadcast Coax/Triax Assembly Configurator

Assembly	Connector 1	Product Code	Connector 2	Length & Unit of Measure	Jacket Color
A	05	1855A	05	150	R

Please select options 1 to 9 (in order):

1. Cable Type:	Coax
2. UL Type:	CMR
3. Cable Grade:	RG-59
4. Cable Construction:	1855A
5. Connector 1 Make:	Belden
6. Connector 1:	1-Piece Compression-1855A
7. Connector 2 Make:	Belden
8. Connector 2:	1-Piece Compression-1855A
9. Type a Length (feet):	150
10. Jacket Color:	RED

Special Labeling Instructions:

Cable Information	
AWG	23
Plenum Rated	No
Riser Rated	Yes
Belden Color Code	002

Connector Information	
Connector 1 Product Code	1855ABHD1
Connector 1 Finish/Band Color	Polished Nickel/Purple
Connector 2 Product Code	1855ABHD1
Connector 2 Finish/Band Color	Polished Nickel/Purple

Part Number:

Description:

Lead Time:






Minimum Order Qty:

Version 1.2

Once configured, each assembly will have a "smart part" number assigned to it that will allow the user to easily determine the construction of the assembly and can be used for repeat ordering. To facilitate the quoting process, the configurators have built-in functionality that allows the user to build a BOM of different assemblies that can then be sent in for quoting purposes.

Assembly	Connector 1	Product Code	Connector 2	Length & Unit of Measure	Jacket Color
A	05	1855A	05	150	R

For more information or to access the configurators, please visit our website; <http://www.belden.com/broadcast-assemblies.cfm>, or call 1-800-422-9961.

Coax	
	<p>Cables: 1694A, 1694WB, 1855A, 1505A, 1505F, 1694F, 1855P, 7731A, 7732A, 1506A, 179DT, 1695A</p> <p>Connectors: Belden Brilliance HD-BNC, King's BNC & Mini DIN's, Amphenol BNC & Mini DIN's</p>
Triax	
	<p>Cables: RG-11 - 8233, 8233A, 8233P, 1859A RG-59 - 1856A, 1857A, 1856B, 88232</p> <p>Connectors: King's Lemo</p>
Tactical Fiber	
	<p>Cables: Single Mode and Multi Mode 2 - 12 channels</p> <p>Connectors: LC, SC & ST Tyco, Amphenol, QPC, Neutrik OpticalCON</p>
SMPTE	
	<p>Cables: 7804R - Industry Standard 7804P - Industry Standard Plenum 7804LW - Light Duty 7804WB - Industry Standard Waterblocked 7804C - Heavy Gauge Standard 7817A - Double Jacket 7818A - Harsh Environment</p> <p>Connectors: Lemo King's Amphenol</p>
Audio Cable	
	<p>Cables: 9451, 9451P, 1800B, 1815R, 1816R, 1513C</p> <p>Connectors: Neutrik XLR Amphenol XLR DT-12</p>

Recommended Transmission Distance at Serial Digital Data Rates

Data Rate:	143 Mb/s		177 Mb/s		270 Mb/s		360 Mb/s		1.5 Gb/s		3.0 Gb/s	
Spec:	SMPTE 259M		ITU-R BT. 601		SMPTE 259M		SMPTE 259M		SMPTE 292M		SMPTE 424M	
Cable Part Number	Composite SD-SDI (NTSC)		Composite SD-SDI (PAL)		Component SD-SDI		Widescreen SD-SDI		HD-SDI		1080p/50-60 3G-SDI	
	Ft.	m	Ft.	m	Ft.	m	Ft.	m	Ft.	m	Ft.	m
179DT	542	165	498	152	416	127	362	110	115	35	81	25
1865A*	686	209	627	191	517	158	446	136	134	41	90	27
1855P	986	301	904	276	746	227	640	195	190	58	125	38
1855A	1022	312	932	284	781	238	680	207	215	66	149	45
1505F	1173	358	1060	323	858	262	732	223	220	67	147	45
1506A***	1354	413	1243	379	1030	314	887	270	265	81	177	54
1694F	1460	445	1312	400	1066	325	916	279	280	85	189	58
1505A**	1440	439	1317	401	1105	337	958	292	304	93	210	64
1695A	1706	520	1566	477	1276	389	1104	337	322	98	211	64
1694WB****	1733	528	1597	487	1333	406	1161	354	363	111	249	76
1694A****	1791	546	1650	503	1371	418	1188	362	371	113	256	78
1694D	1791	546	1650	503	1371	418	1188	362	371	113	256	78
7732A	2575	785	2335	712	1929	588	1638	499	451	137	283	86
1794A	2276	694	2078	633	1746	532	1510	460	469	143	320	98
7731A	2791	851	2613	796	2146	654	1871	570	580	177	393	120

The serial digital interconnect standards are designed to operate where the signal loss at 1/2 the clock frequency does not exceed the approximate loss values listed below. The recommended length values shown are based on typical attenuation values for the cables listed and the following criteria: **Maximum length = 30 dB loss at 1/2 the clock frequency: SMPTE 259M, PAL, Widescreen. Maximum length = 20 dB loss at 1/2 the clock frequency: SMPTE 292M and SMPTE 424M.**

The bit error rate (BER) can vary dramatically as the calculated distances are approached. BER is dependent on receiver design and the losses of the actual coax used. Distribution and routing equipment manufacturers should be contacted to verify their maximum recommended transmission.

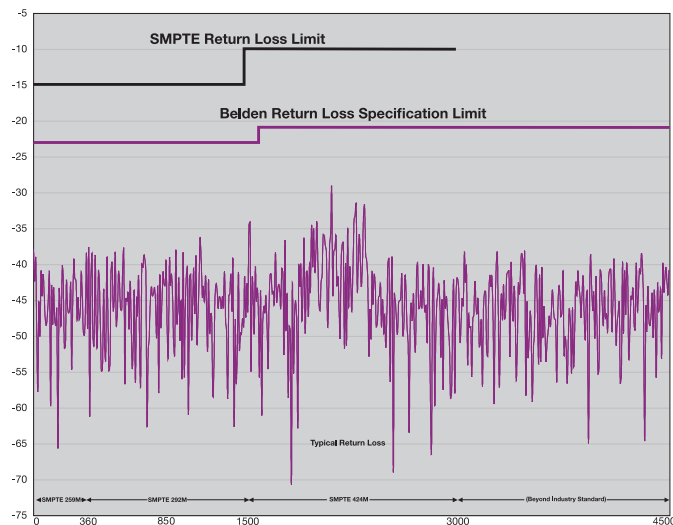
* Includes cables that use 1855A as a constituent, such as 7787A, 7788A, 7789A, 7790A, 7791A, 7792A, 1855S3, 1855S5, 1855S6

** Includes cables that use 1505A as a constituent, such as 7794A, 7795A, 7796A, 7798A, 1505S3, 1505S5, 1505S6

*** Includes cables that use 1506A as a constituent, such as 1283S3, 1283S5, 1283S6

**** Includes cables that use 1694A as a constituent, such as 7710A, 7711A, 7712A, 7713A, 1694S3, 1694S5, 1694S6, 1694WB, 1694D

Return Loss Headroom (1694A)



Maximum Recommended Transmission Distance at Digital Audio Data Rates* (AES3-2003)**

Part Number	6 MHz		12 MHz		25 MHz	
	Ft.	m	Ft.	m	Ft.	m
1353A	1112	339	772	235	525	160
9180, 7880A Series	813	248	633	193	474	144
1800F	664	203	424	129	279	85
1800B, 1801B, 1802B, 1803F Series	1105	337	877	267	649	198
1696A	1538	469	1250	381	1015	309
179DT (AES3)†♦	1005	306	722	220	522	159
(AES-3id)††	402	123	289	88	209	64
1855A (AES3)†♦	1992	607	1538	469	1111	339
(AES-3id)††	796	242	615	188	444	135
1505A (AES3)†♦	2911	887	2222	677	1538	469
(AES-3id)††	1164	355	888	270	615	188
1505F (AES3)†♦	2985	910	2041	622	1389	423
(AES-3id)††	1194	364	816	249	556	169
1694A (AES3)†♦	3407	1039	2500	762	2000	610
(AES-3id)††	1363	416	1000	305	800	244
1694F (AES3)†♦	3660	1116	2411	735	1701	518
(AES-3id)††	1811	552	1193	364	841	256

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9