

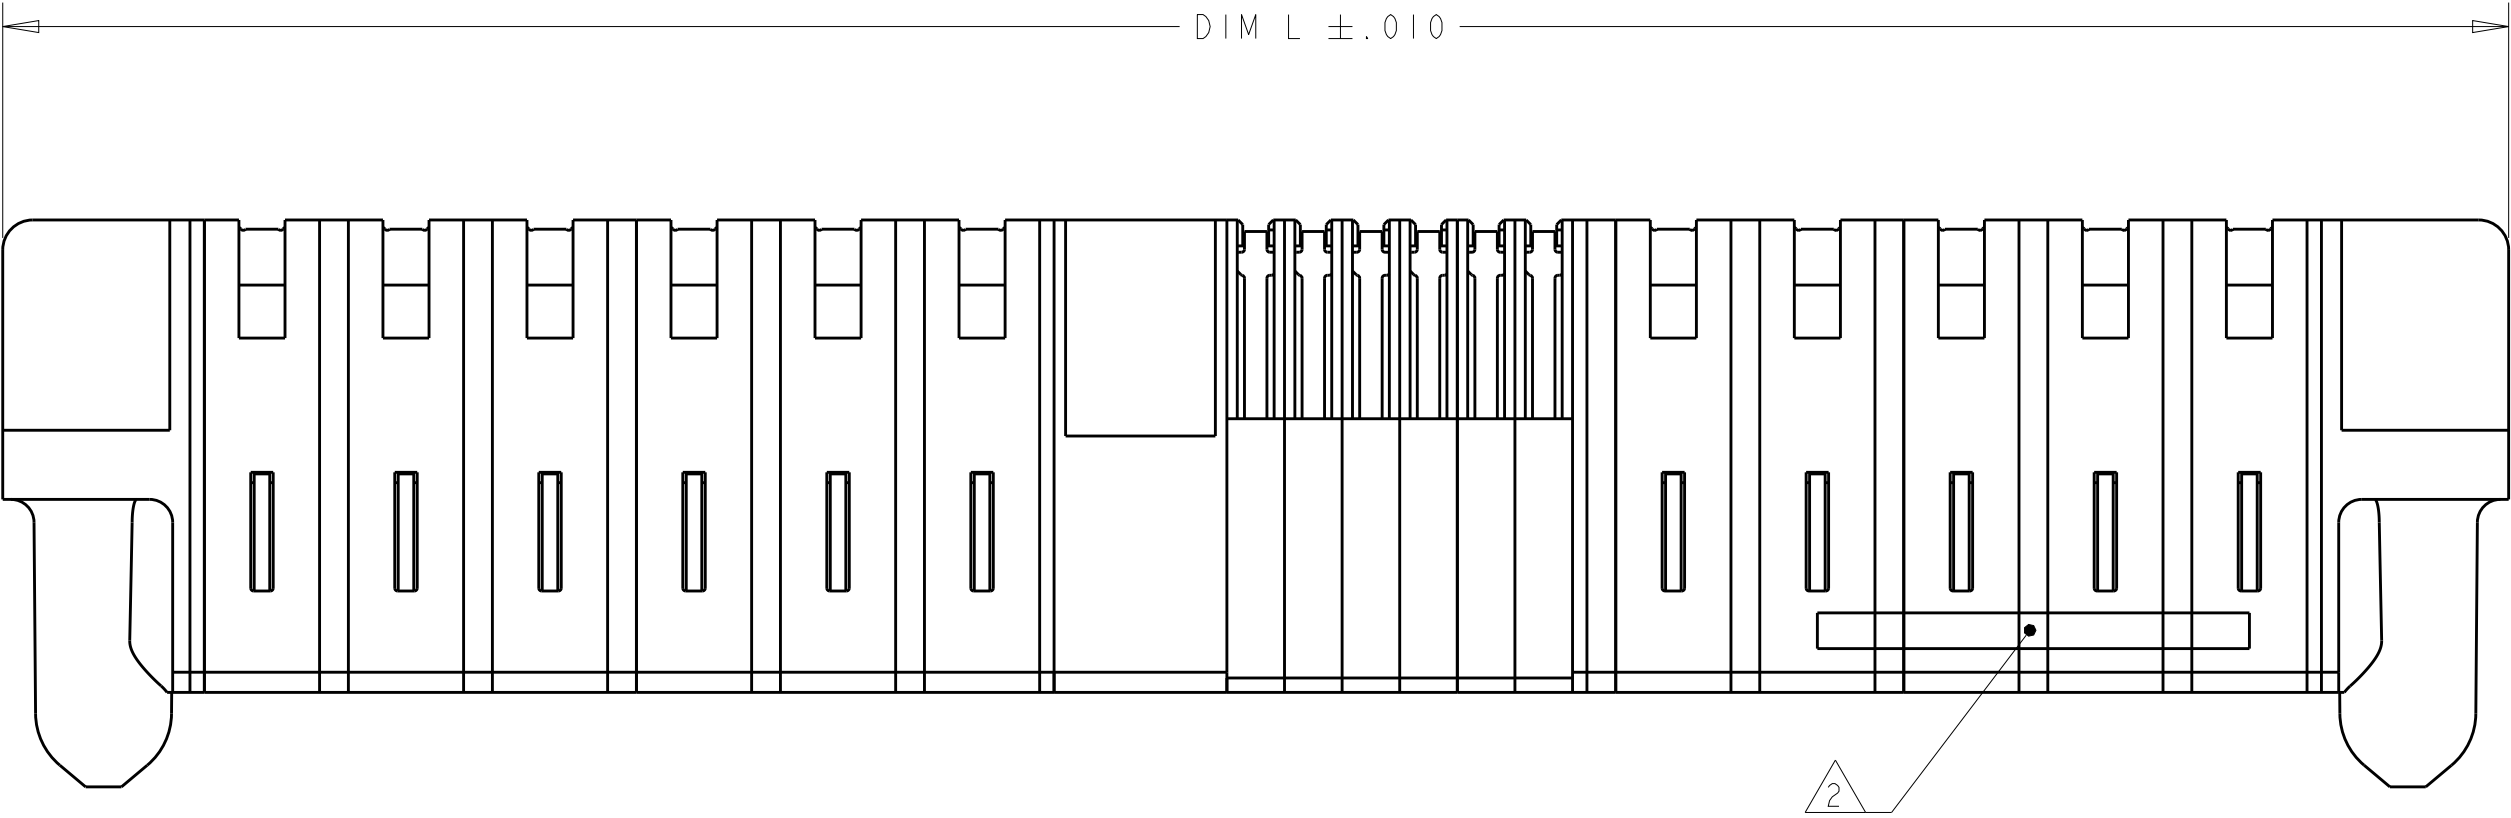
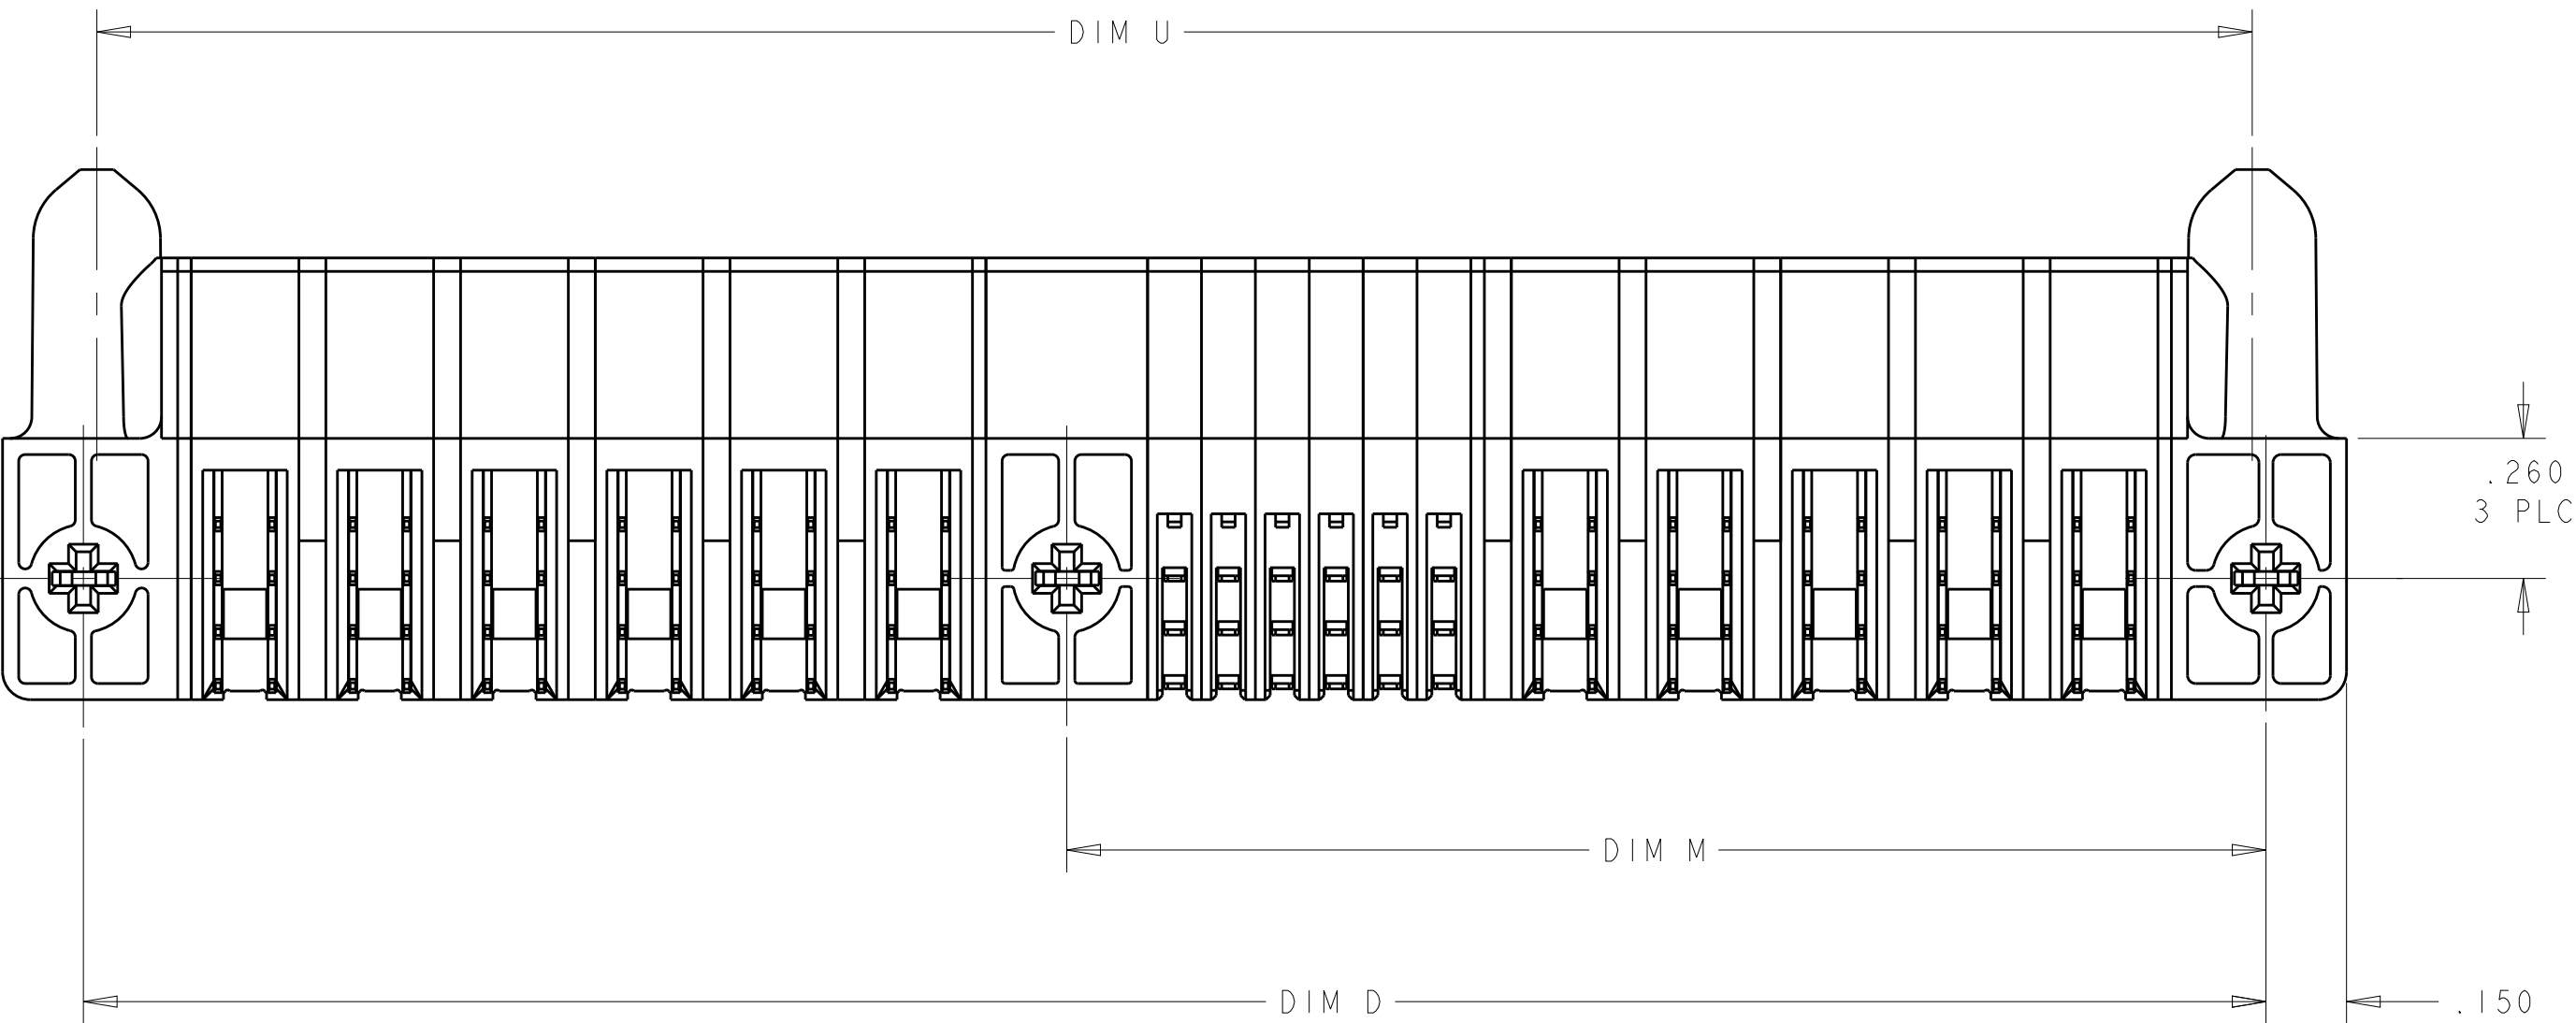
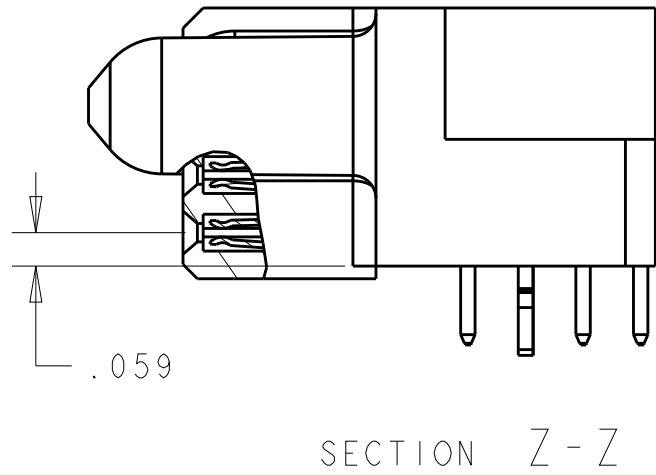


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		G	REV PER ECO-15-000526	19JAN2015	LAW	CZ

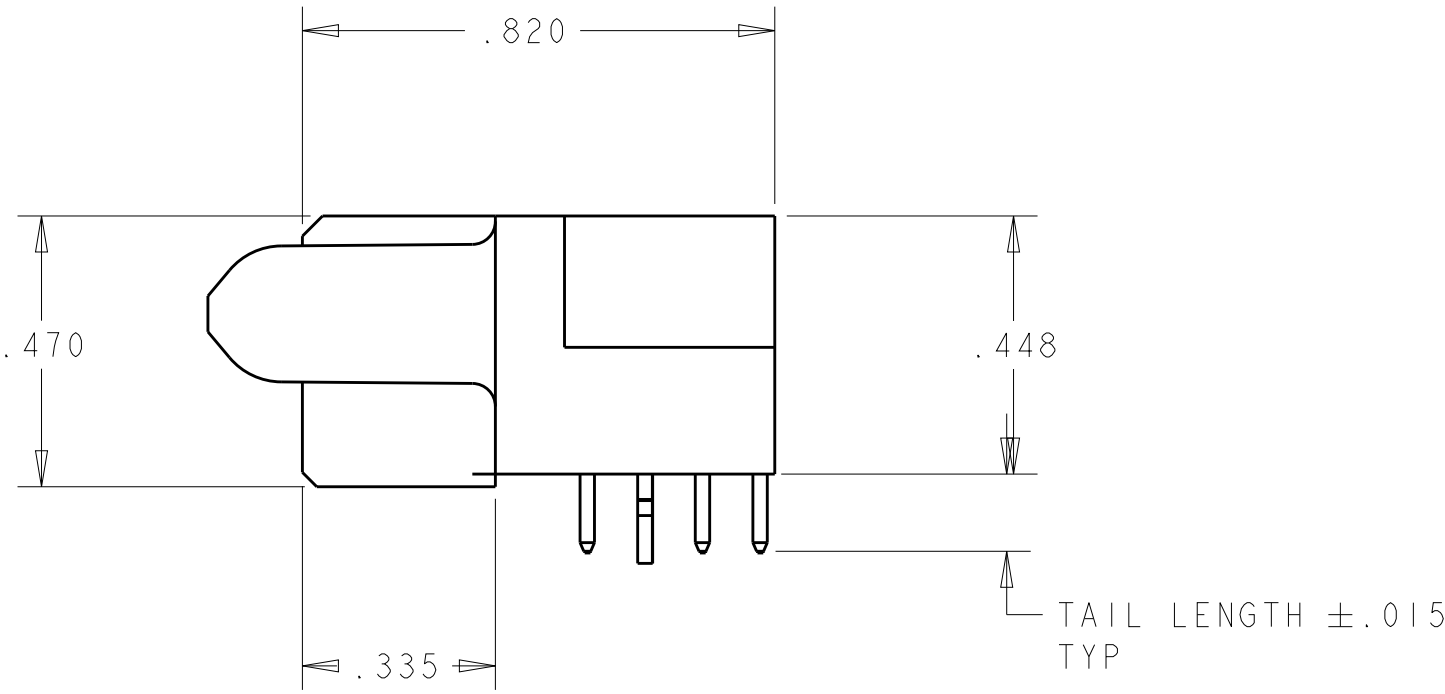

- 1 OPTIONAL CENTER MODULE, WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE.
- 2 "AMP", PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN.
- 3 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, BLACK, UL94 V-0
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4 CONTACT PLATING: NOBLE PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
- 5 MECHANICAL CONNECTOR KEEP OUT ZONE.
- 6 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7 PCB- ALL HOLE DIAMETERS ARE FINISHED DIMENSIONS.
- 8 PCB- Ø.0453 +/- .0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001-.003 CU PLATING TO ACHIEVE A Ø.040±.003 HOLE.

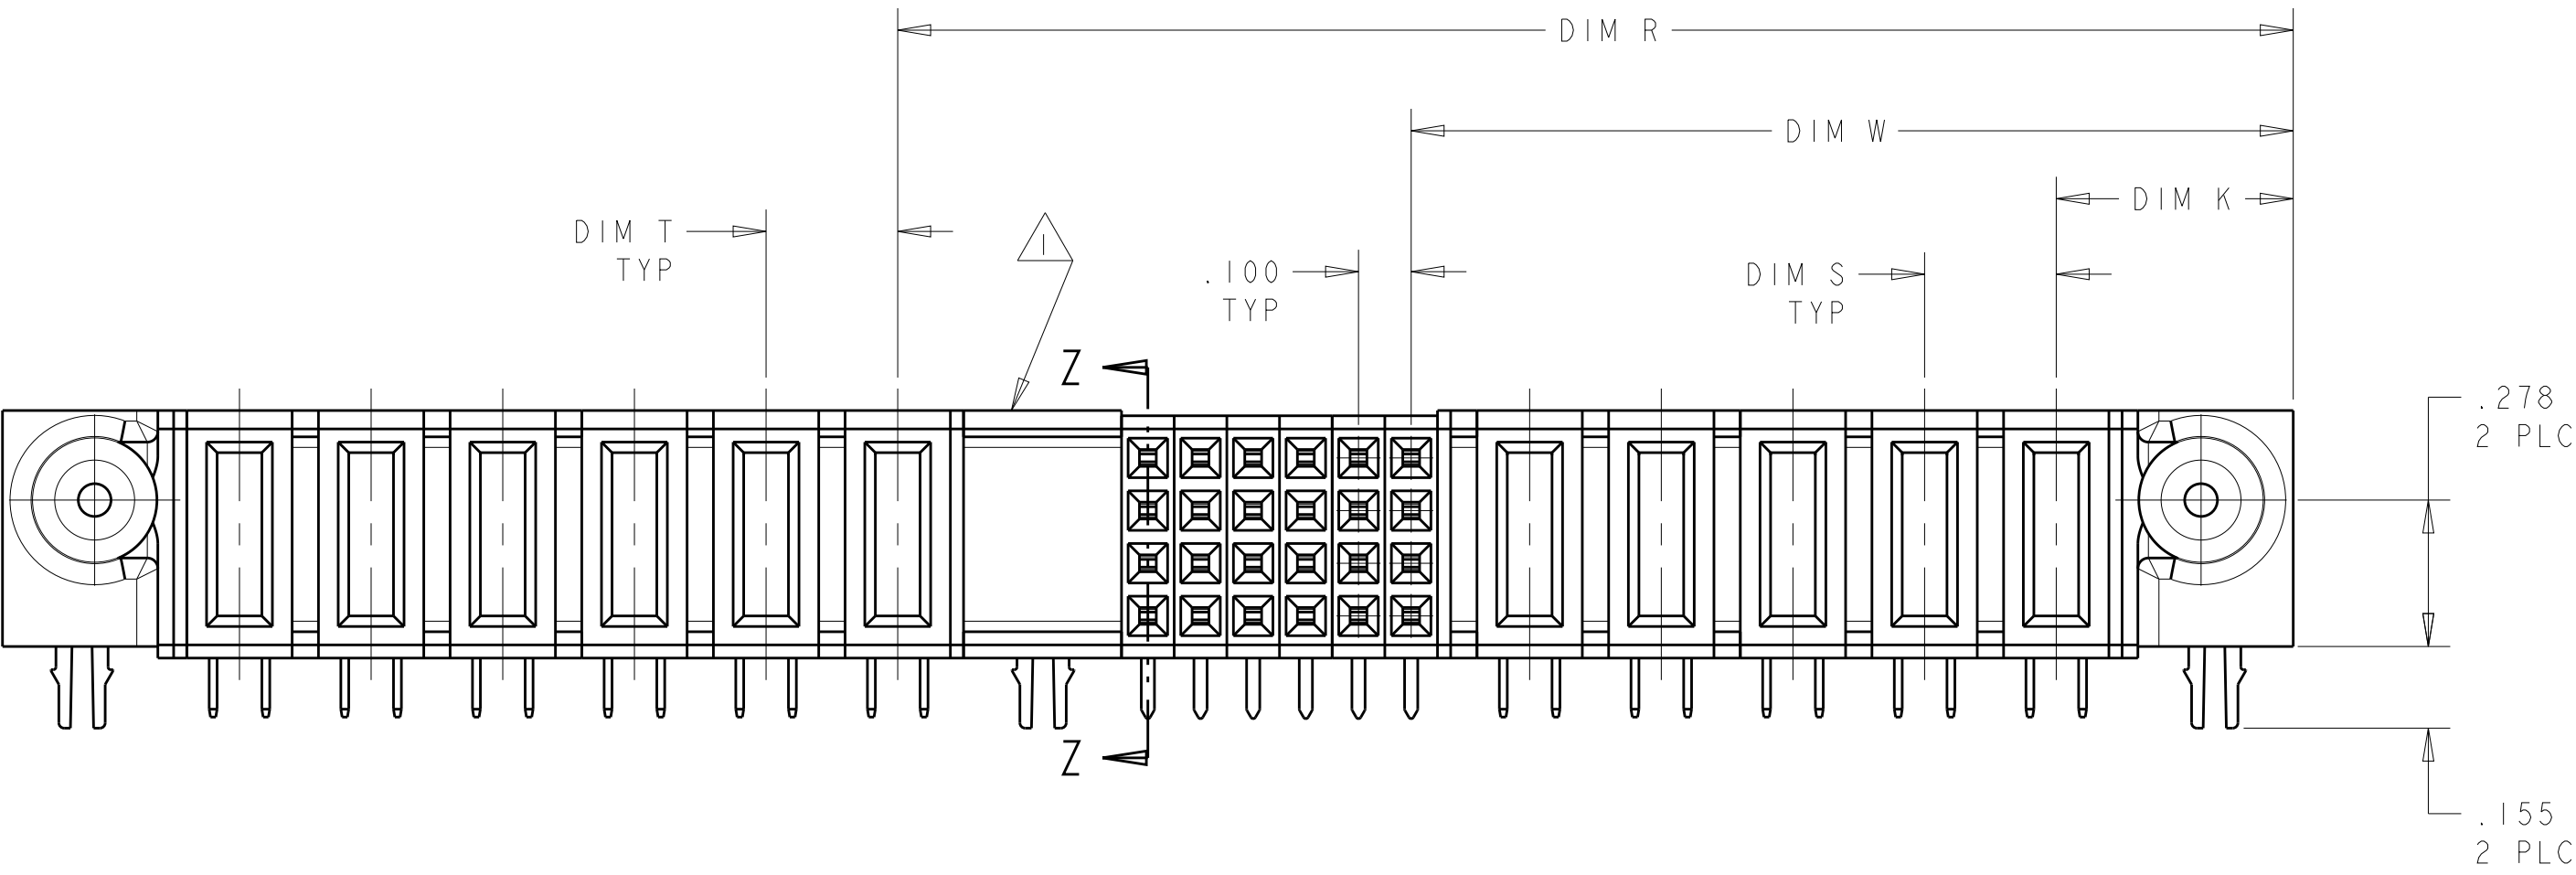


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI 21FEB05	TE Connectivity	
		CHK M.PERCHERKE 21FEB05		
DIMENSIONS:		APVD M.PERCHERKE 21FEB05	NAME RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
INCHES		PRODUCT SPEC		
		108-1973	SIZE CAGE CODE DRAWING NO	
		APPLICATION SPEC		
MATERIAL		114-13038	A100779C=6450160	
		FINISH		
		WEIGHT	Customer Drawing	
		Customer Drawing		
		SCALE 3:1	SHEET 1 OF 16	
		REV G1		

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

.700	-	-	-	.375	.750	-	1.050	-	16S	4-6450160-9
2.700	-	.200	2.600	1.425	2.750	-	3.050	.450	5P + 44S + 1P	4-6450160-8
4.000	-	-	-	.375	4.050	-	4.350	-	148S	4-6450160-6
2.000	.250	.250	1.650	.925	2.050	-	2.350	.450	2P + 24S + 2P	4-6450160-5
2.800	-	-	-	0.375	2.850	-	3.150	-	100S	4-6450160-4
1.100	-	-	1.000	.625	1.150	-	1.450	.450	1P + 12S + 1P	4-6450160-1
2.400	.250	.250	1.550	.875	2.450	-	2.750	.450	2P + 24S + 4P	4-6450160-0
4.700	.250	.250	2.850	2.375	4.750	-	5.050	.450	8P + 16S + 8P	3-6450160-9
5.400	.300	.300	2.875	2.175	5.450	-	5.750	.475	6P + 24S + 9P	3-6450160-8
2.900	.250	.250	2.050	1.375	2.950	-	3.250	.450	4P + 24S + 4P	3-6450160-7
3.900	.250	.250	2.550	1.875	3.950	-	4.250	.450	6P + 24S + 6P	3-6450160-6
3.800	.250	.250	3.450	.875	3.850	-	4.150	.450	2P + 100S + 2P	3-6450160-4
3.700	.300	.200	2.700	2.025	3.750	-	4.050	.450	8P+24S+4ACP	3-6450160-3
2.800	.300	.250	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	3-6450160-2
1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	3-6450160-1
4.375	.300	.250	3.375	2.375	3.450	2.950	4.725	.450	8P+24S+1M+4ACP	3-6450160-0
4.100	.250	.300	2.250	1.575	4.150	-	4.450	.475	4ACP + 24S + 8P	2-6450160-9
2.000	.250	.300	1.650	1.325	2.050	-	2.350	.475	3ACP + 8S + 2P	2-6450160-7
2.600	.200	.200	1.900	1.225	2.650	-	2.950	.450	4HDP + 24S + 4HDP	2-6450160-6
2.000	.250	.250	1.650	.925	2.050	-	2.350	.450	2P + 24S + 2P	2-6450160-5
4.000	.250	.250	2.650	1.675	4.050	2.225	4.350	.450	5P + 24S + 1M + 6P	2-6450160-0
3.300	.250	.250	2.450	1.875	3.350	-	3.650	.450	6P + 20S + 4P	1-6450160-9
4.675	.300	.250	3.950	3.375	4.725	-	5.025	.450	12P + 20S + 3ACP	1-6450160-8
3.250	.250	.250	2.900	1.125	3.300	-	3.600	.450	3P + 68S + 2P	1-6450160-3
.900	-	-	-	.375	.950	-	1.250	-	0P + 24S + 0P	1-6450160-2
1.900	-	-	.975	.625	1.950	-	2.250	.450	1P + 12S + 5P	1-6450160-1
1.900	.250	.250	1.550	.875	1.950	-	2.250	.450	2P + 24S + 2P	1-6450160-0
3.300	.250	.250	2.450	1.875	3.350	-	3.650	.450	6P + 20S + 4P	6450160-9
2.400	.250	.250	1.800	1.125	2.450	-	2.750	.450	3P + 24S + 3P	6450160-8
3.050	.250	.300	1.950	1.275	3.100	-	3.400	.475	3ACP + 24S + 5P	6450160-7
7.400	.250	.250	5.050	2.875	7.450	-	7.750	.450	10P + 84S + 10P	6450160-6
4.000	.250	.250	2.650	1.675	4.050	2.225	4.350	.450	5P + 24S + 1M + 6P	6450160-5
4.000	.250	.250	2.650	1.675	4.050	2.225	4.350	.450	5P + 24S + 1M + 6P	6450160-4
1.575	-	-	1.425	.700	1.625	-	1.925	.475	1P + 24S + 1P	6450160-3
1.575	-	-	1.425	.700	1.625	-	1.925	.475	1P + 24S + 1P	6450160-2
5.100	.250	.250	3.250	2.375	5.150	-	5.450	.450	8P + 32S + 8P	6450160-1
U	T	S	R	W	D	M	L	K	DESCRIPTION	PART NUMBER

(E6) PART IS IN SHEET 15

THIS DRAWING IS A CONTROLLED DOCUMENT.
DIMENSIONS:
INCHES



0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.2°
FINISH

MATERIAL

Customer Drawing

DWN R. GRZYBOWSKI 21FEB05
CHK M. PERCHERKE 21FEB05
APVD M. PERCHERKE 21FEB05

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT -

Customer Drawing

NAME
RIGHT ANGLE RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE 100779
CAGE CODE
DRAWING NO
C=6450160


RESTRICTED TO
-

TE Connectivity

SCALE 3:1
SHEET 2 OF 16
REV G1


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER								SIGNAL								POWER													
			P16	P15	P14	P13	P12	P11	P10	P9	8	7	6	5	4	3	2	1	P8	P7	P6	P5	P4	P3	P2	P1						
6450160-1	D C B A		RA	RA	RA	RA	RA	RA	RA	H	G	H	G	H	G	H	G	H	G	H	G	H	G	H	RA	RA	RA	RA	RA	RA	RA	
9P + 36S + 8P																																

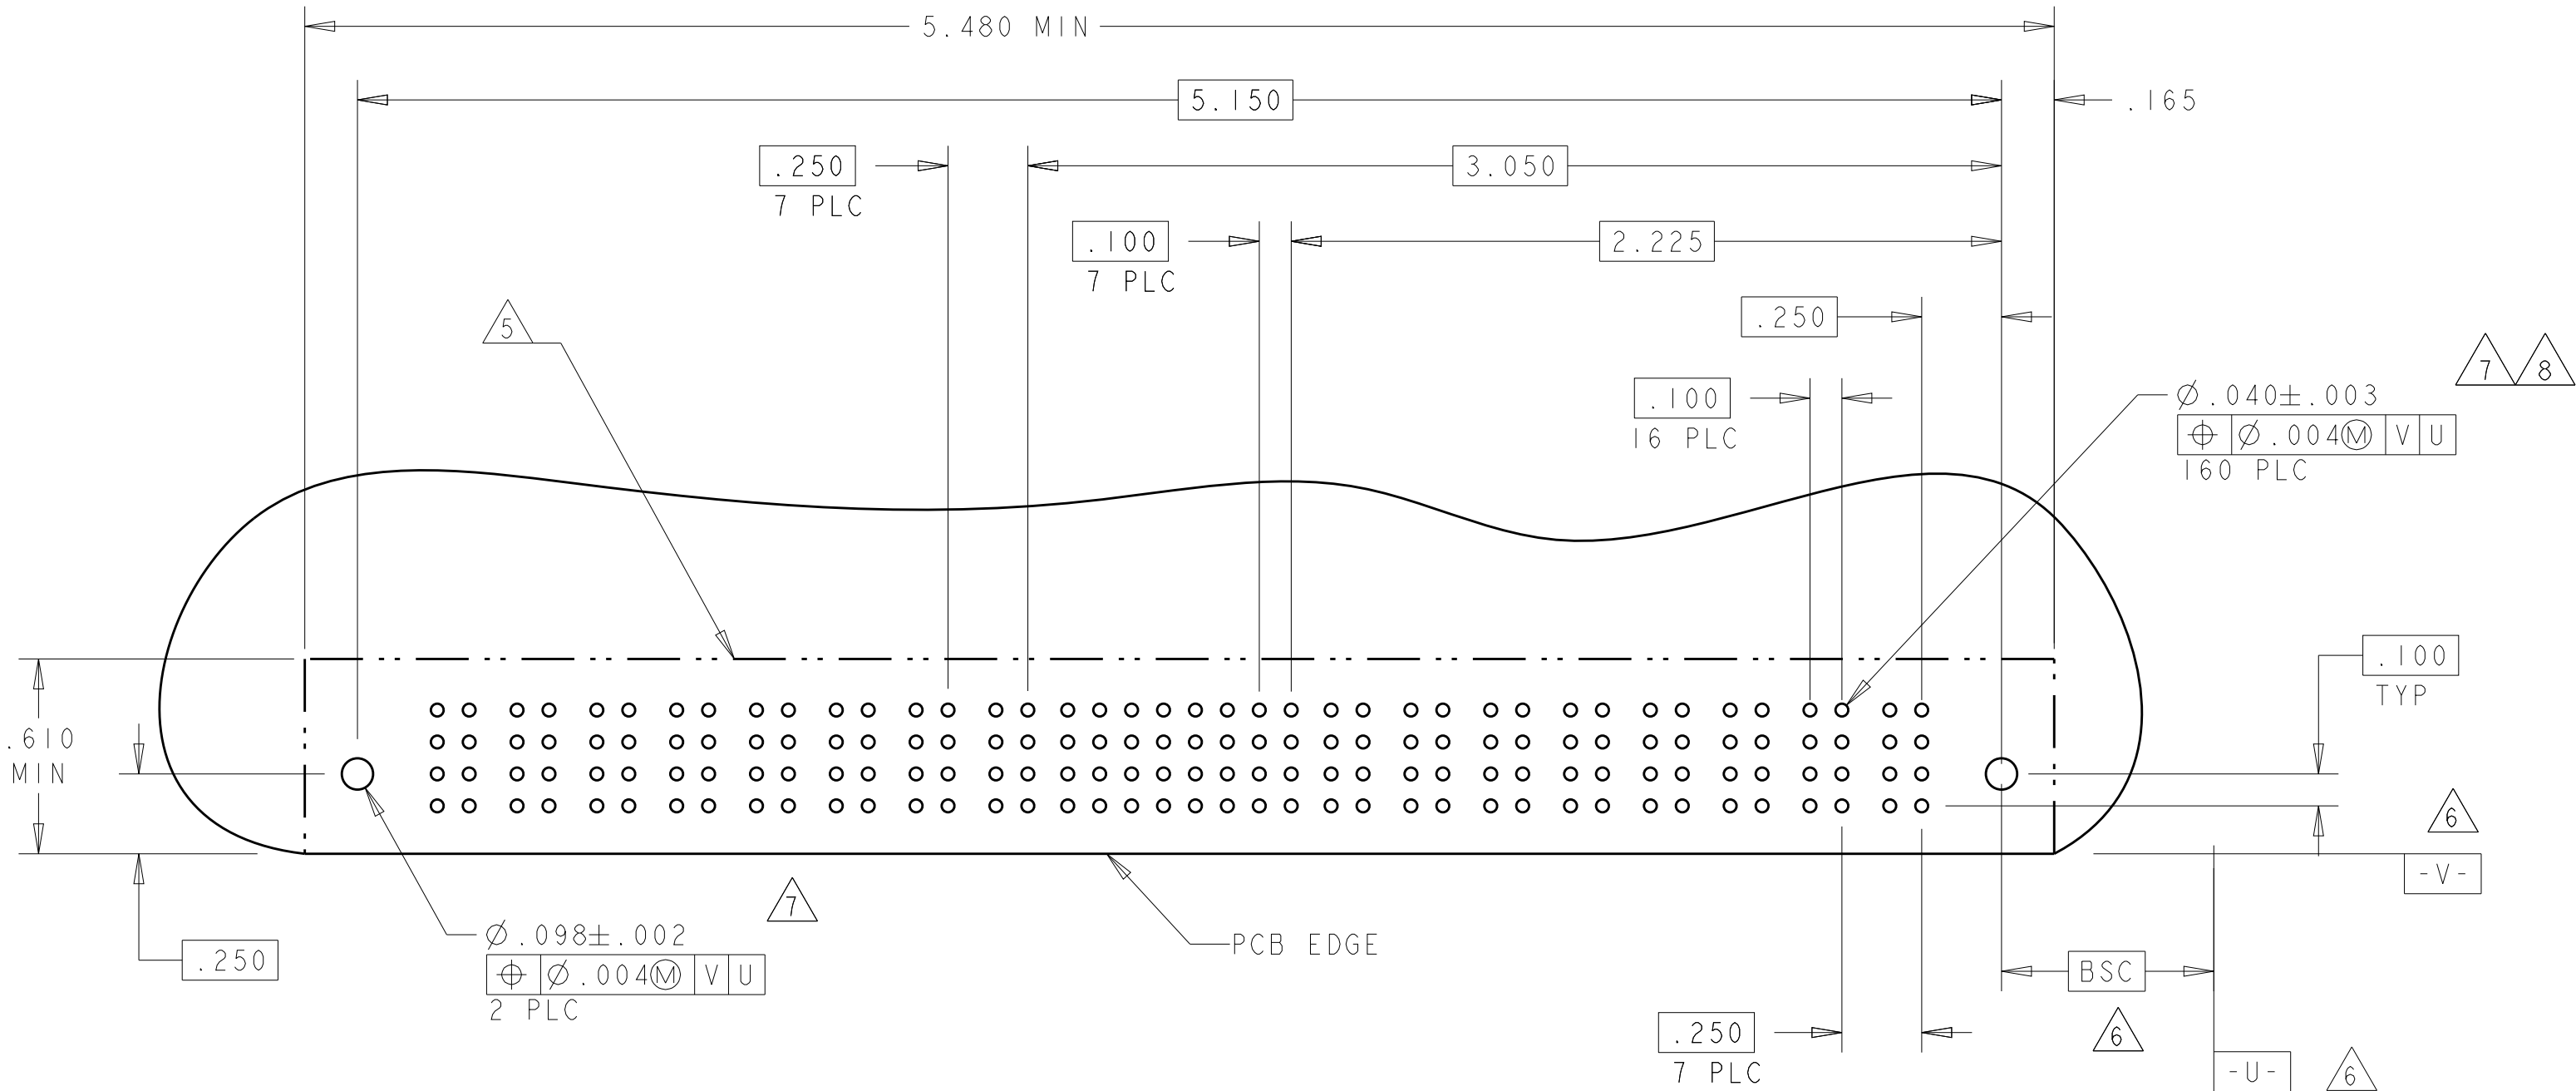


PART NUMBER	ROWS		POWER						MI	SIGNAL							POWER						
			P11	P10	P9	P8	P7	P6		6	5	4	3	2	1	P5	P4	P3	P2	P1			
6450160-4	D C B A		RB	RB	RB	RB	RB	HD	L	K	J	I	H	G	F	E	D	C	B	A	HD		
5P + 24S + 1M + 6P																							

PART NUMBER	ROWS		POWER						MI	SIGNAL						POWER						
			P11	P10	P9	P8	P7	P6		6	5	4	3	2	1	P5	P4	P3	P2	P1		
6450160-5	D C B A		RA	RA	RA	RA	RA	HD	H	G	G	H	G	H	RA	RA	RA	RA	RA	HD		
5P + 24S + 1M + 6P																					HD	

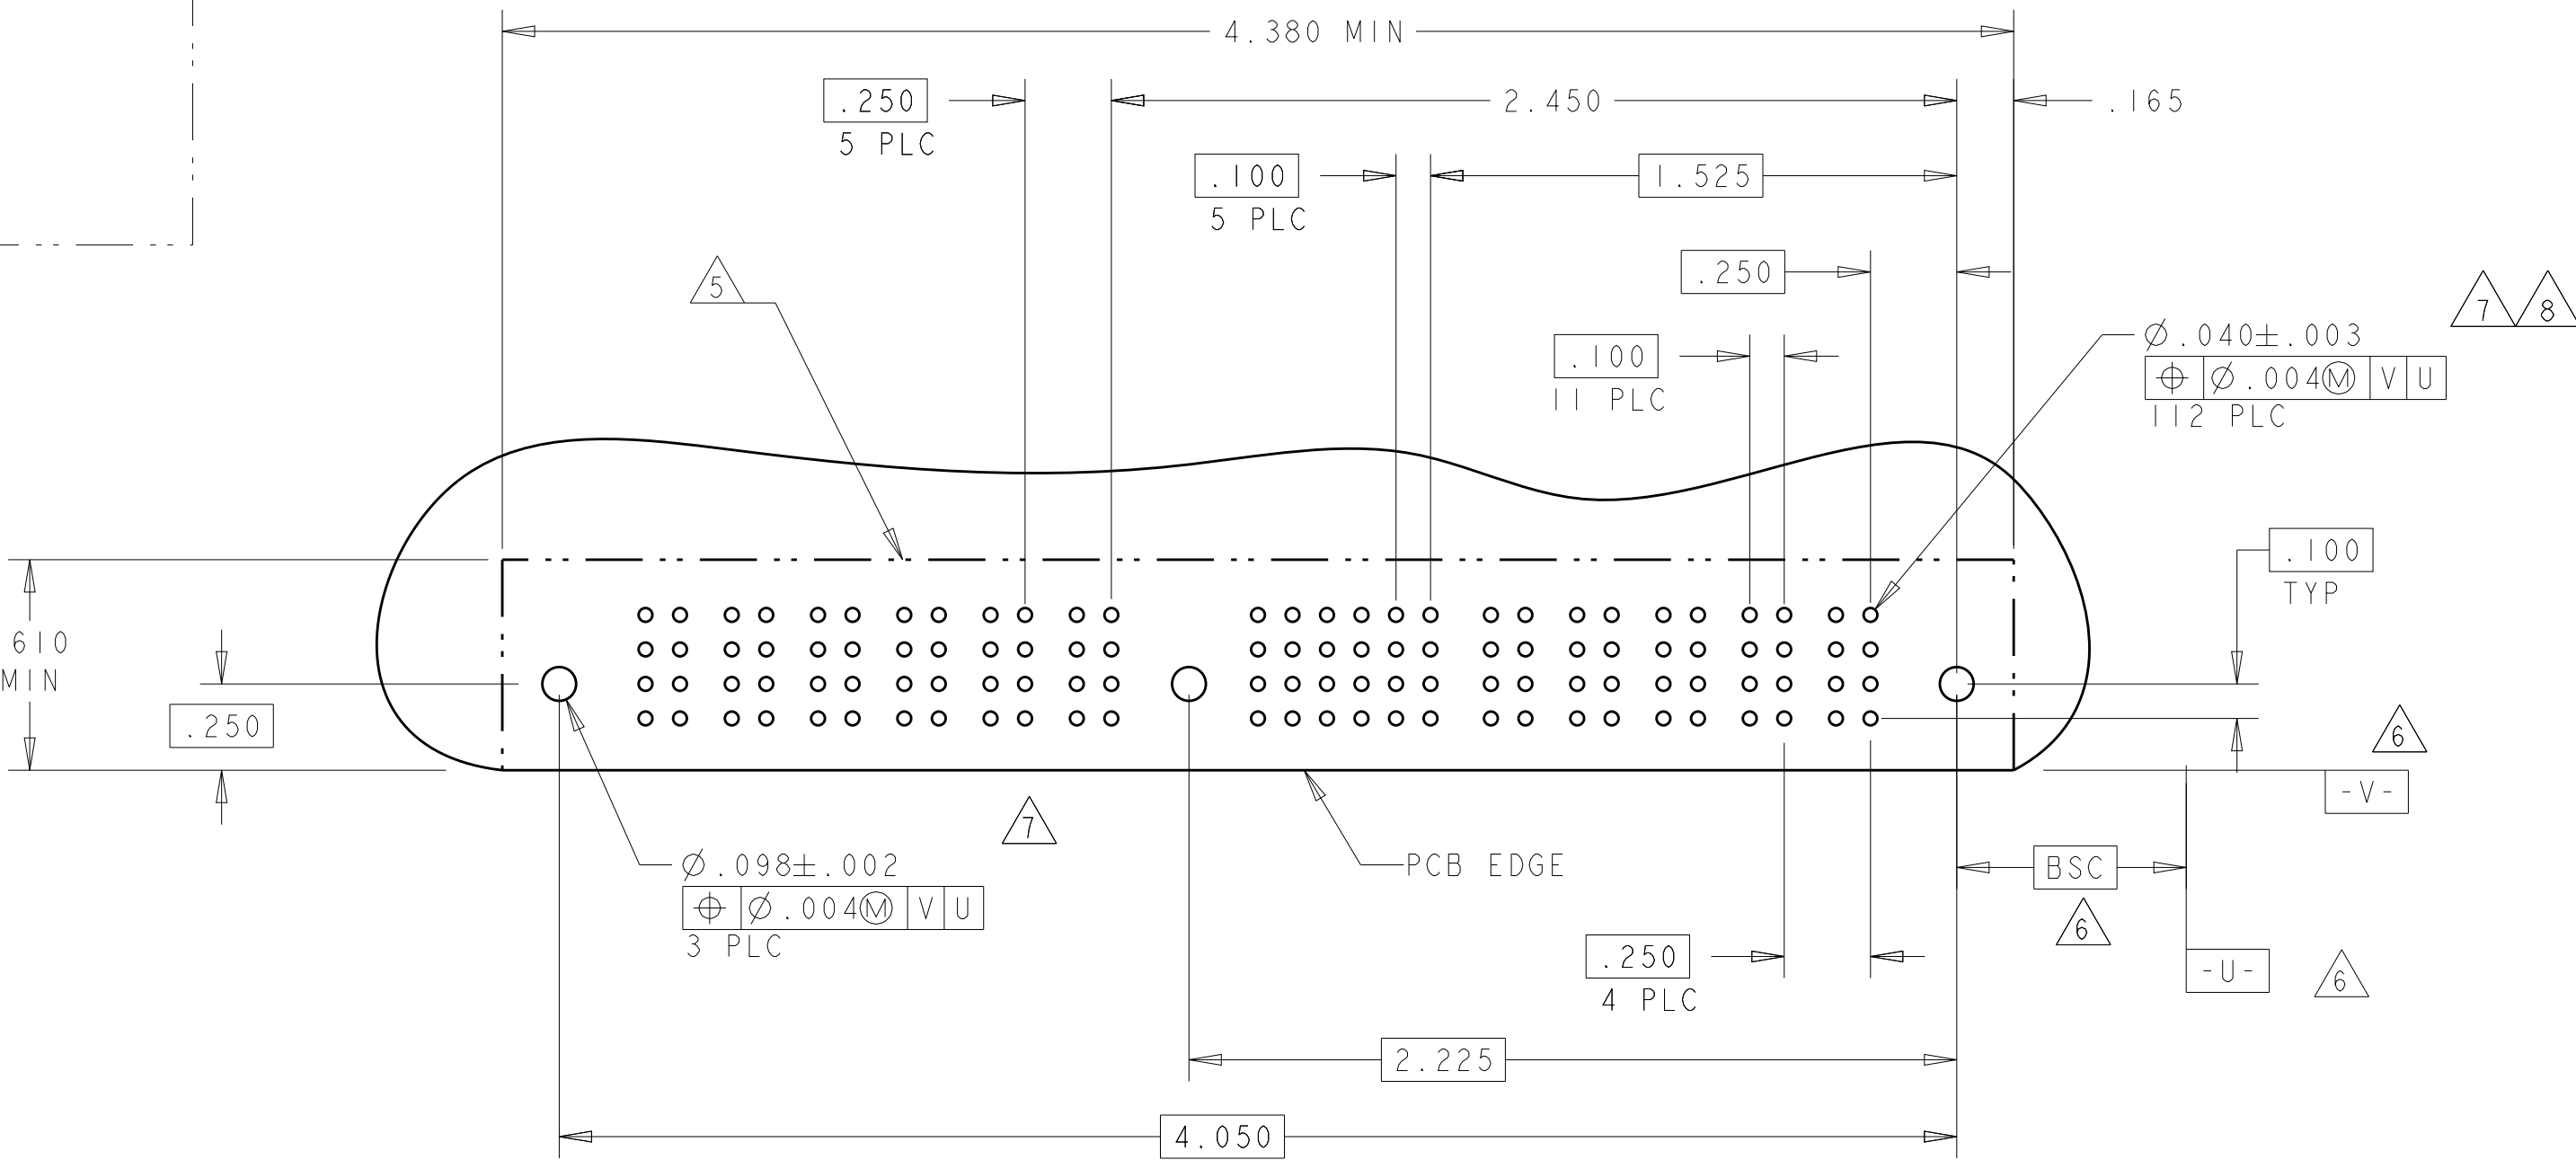

PART NUMBER	ROWS			POWER		SIGNAL							POWER	
		P2		6	5	4	3	2	1	P1				
6450160-2	D C B A			RB	L	L	L	L	L	L	L	L	RB	
					K	K	K	K	K	K	K	K		
					J	J	J	J	J	J	J	J		
					I	I	I	I	I	I	I	I		
IP + 24S + IP														

PART NUMBER	ROWS		POWER		SIGNAL							POWER		
			P2		6	5	4	3	2	1	P1			
6450160-3	D C B A			H	H	H	H	G	G	G	G			
				G	G	G	G	F	F	F	F			
				F	F	F	F	E	E	E	E			
				E	E	E	E							
IP + 24S + IP														

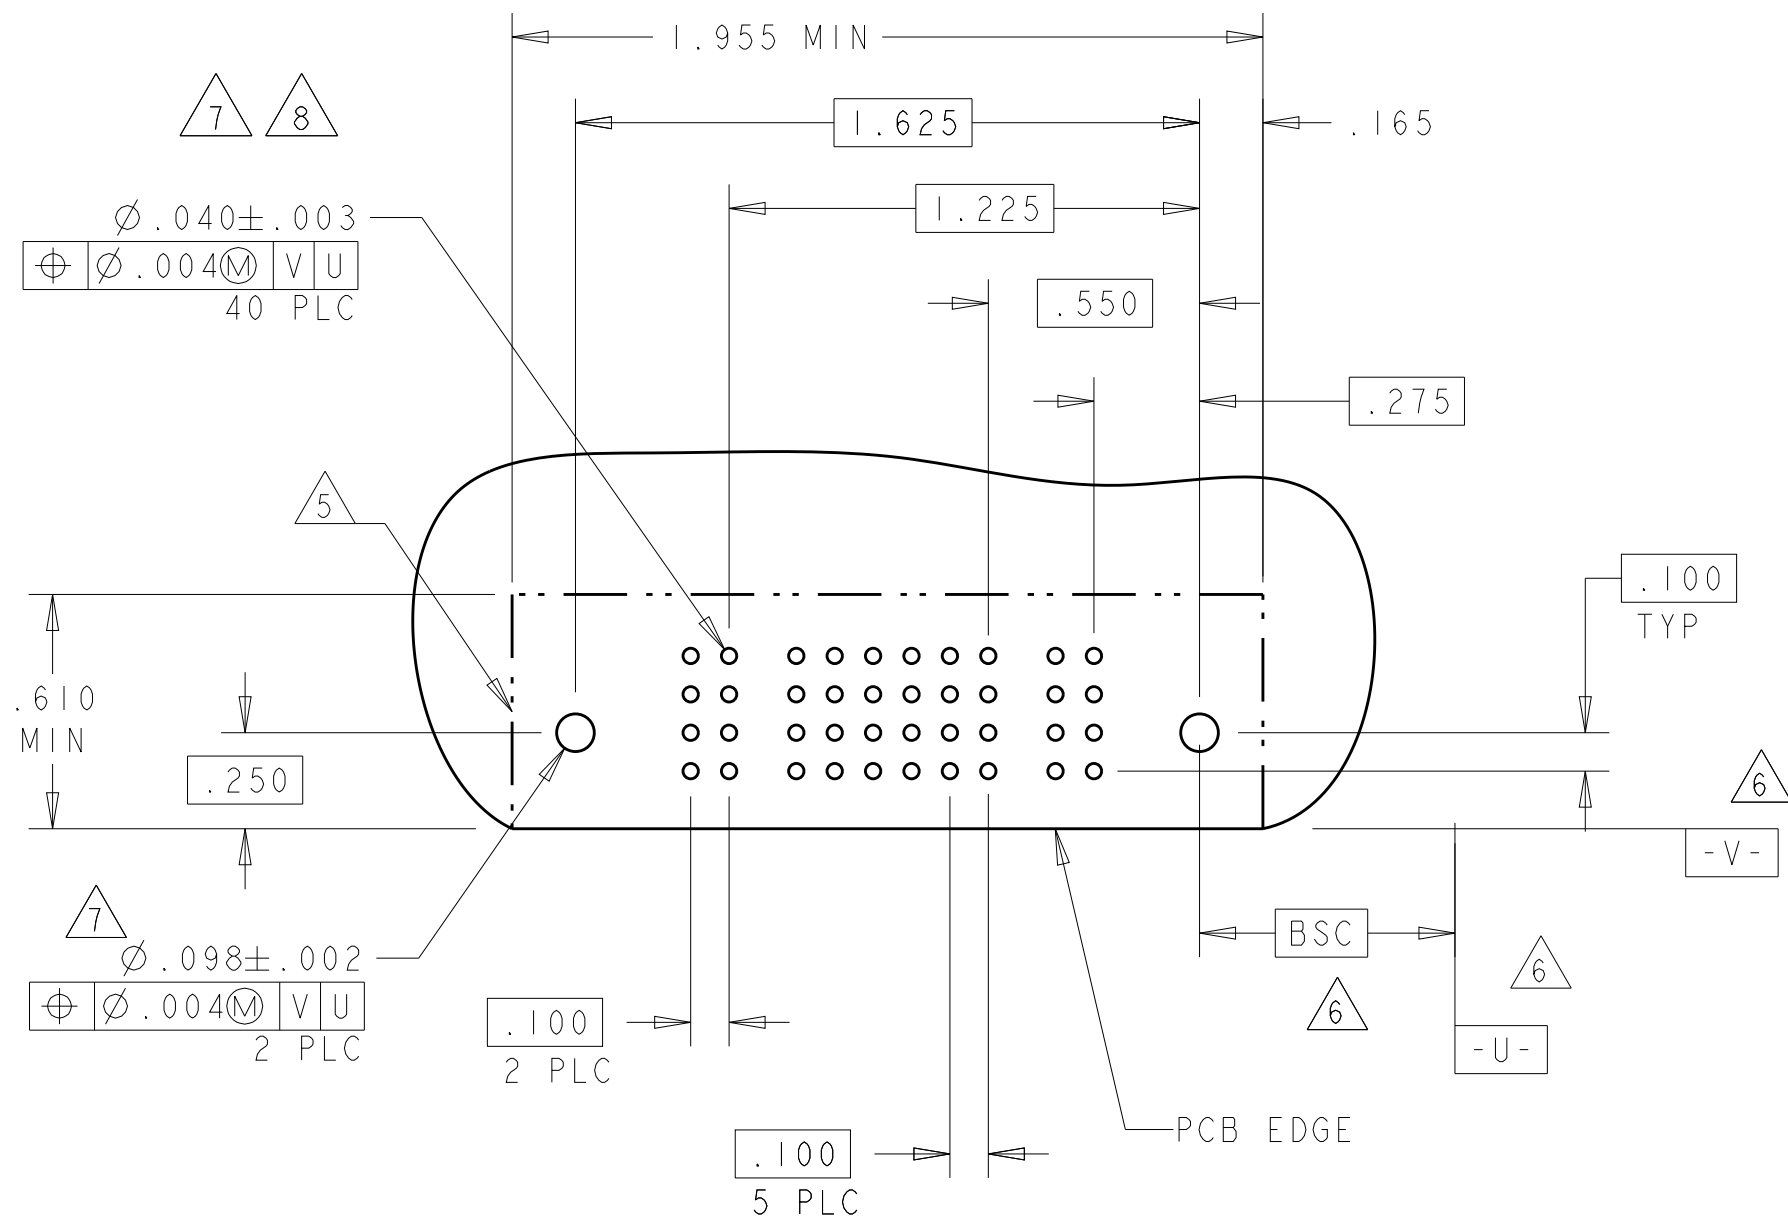

RN	TAIL LENGTH	DESCRIPTION
RM	.135	STD
RA	.135	MFBL
RB	.090	MFBL
CODE	TAIL LENGTH	DESCRIPTION
POWER CONTACT		

L	.090	D
K	.090	C
J	.090	B
I	.090	A
H	.135	D
G	.135	C
F	.135	B
E	.135	A
CODE	TAIL LENGTH	ROW
SIGNAL CONTACT		

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN: R. GRZYBOWSKI, 21FEB05
CHK: M. PERCHERKE, 21FEB05
APVD: M. PERCHERKE, 21FEB05

PRODUCT SPEC: 108-1973
APPLICATION SPEC: 114-13038
WEIGHT: -


Customer Drawing

TE Connectivity


RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE: A1, CAGE CODE: 100779, DRAWING NO: 6450160, SHEET 3 OF 16, REV G1


PART NUMBER	ROWS	POWER					SIGNAL							POWER		
		P8	P7	P6	P5	P4	G6	5	4	3	2	1	P3	P2	P1	
6450160-7	D C B A		RA	RA	RA	RA	H	H	H	H	H	H	RA	RA	RA	
							G	G	G	G	G	G				
							F	F	F	F	F	F				
							E	E	E	E	E	E				
3ACP + 24S + 5P		HD														HD

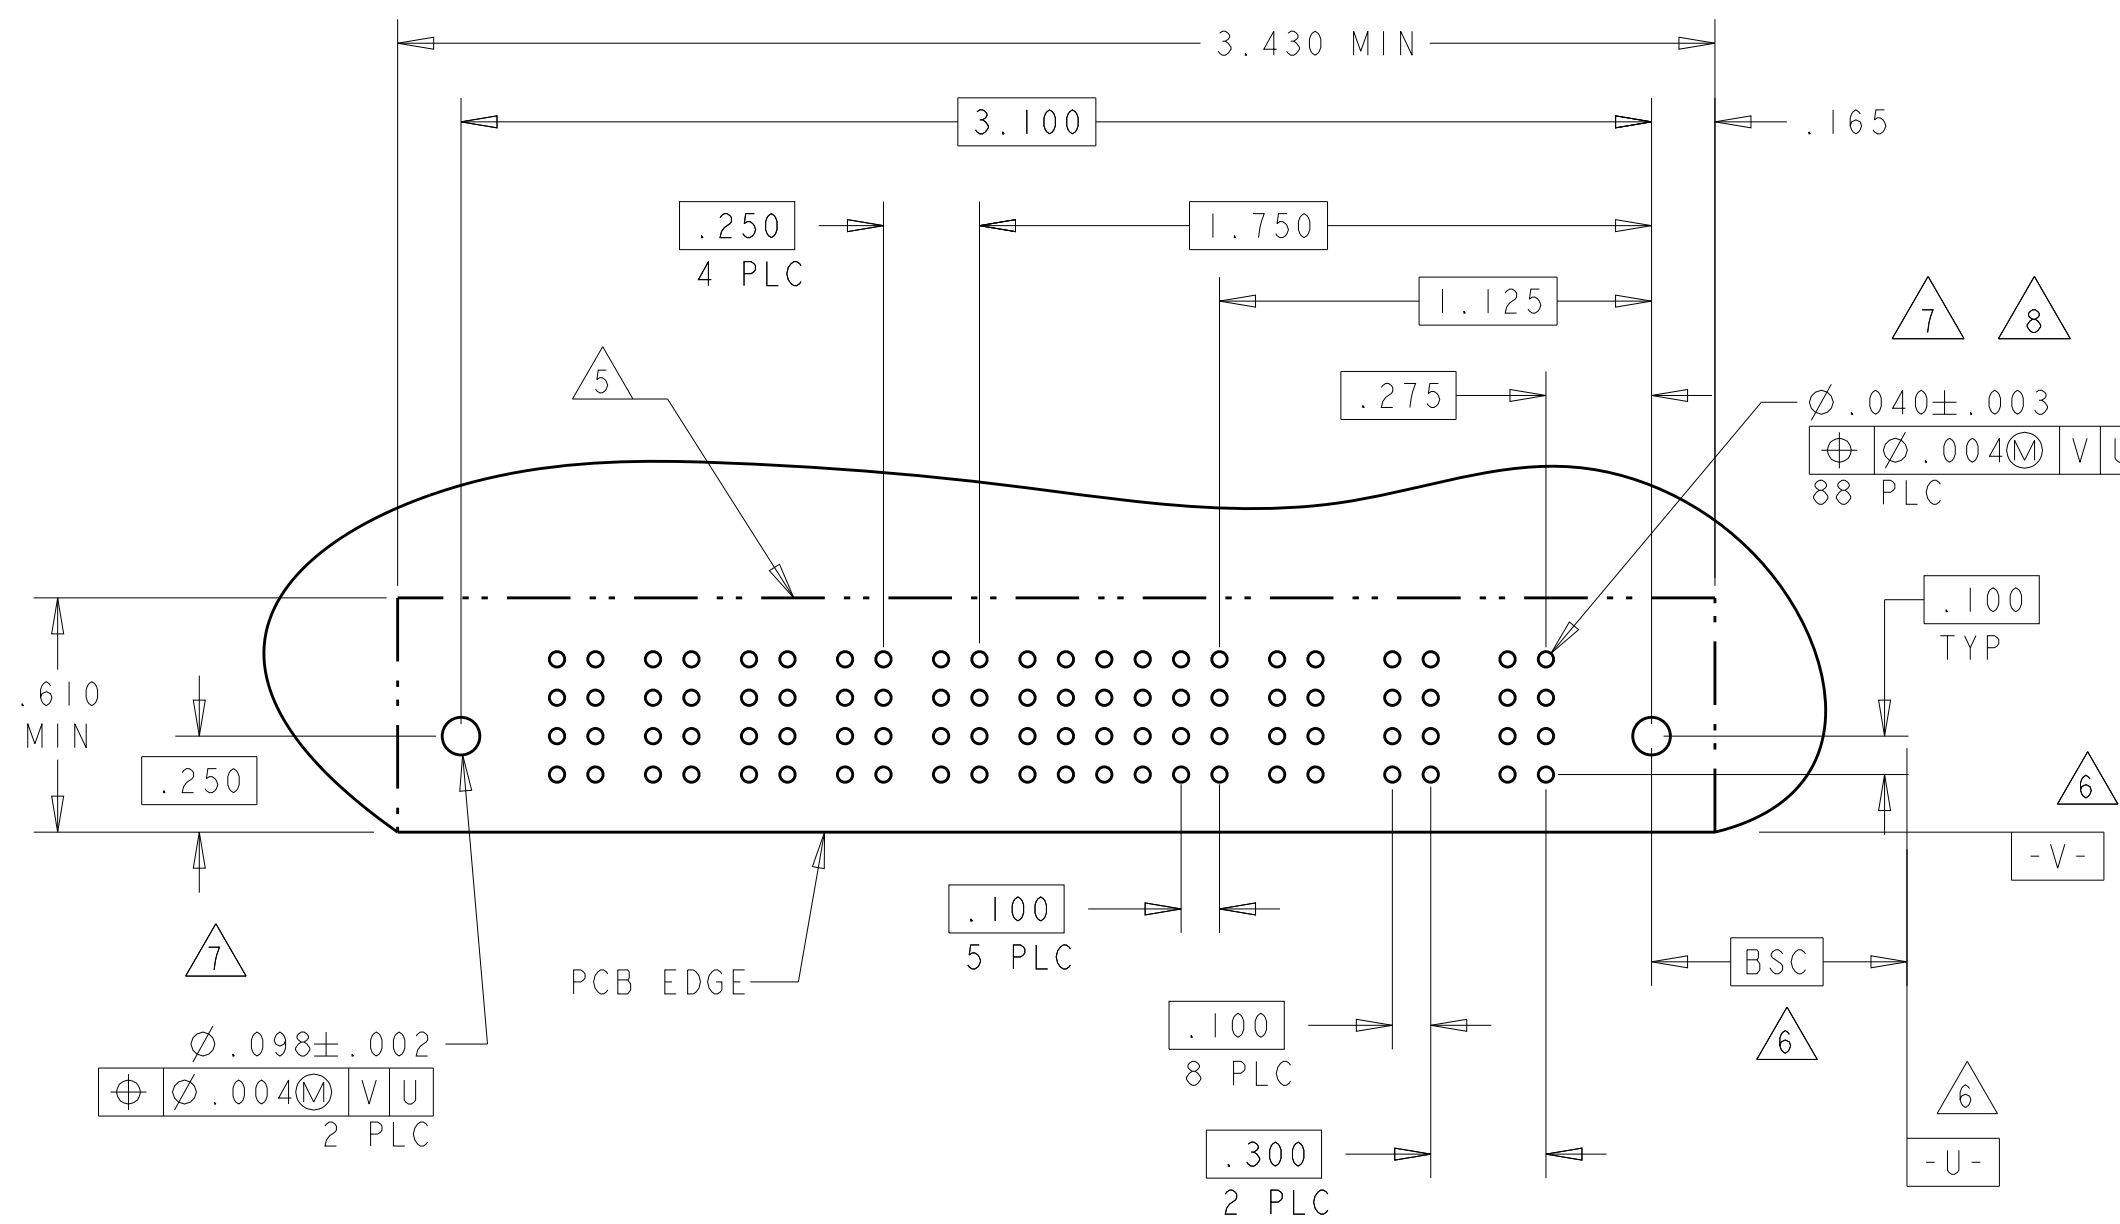


PART NUMBER	ROWS		POWER				SIGNAL				POWER									
			P10	P9	P8	P7	5	4	3	2	1	P6	P5	P4	P3	P2		P1		
6450160-9	D C B A		RA	RA	RA	RA	G	H	H	H	H	G	RA	RA	RA	RA	RA	RA		
6P + 20S + 4P																				

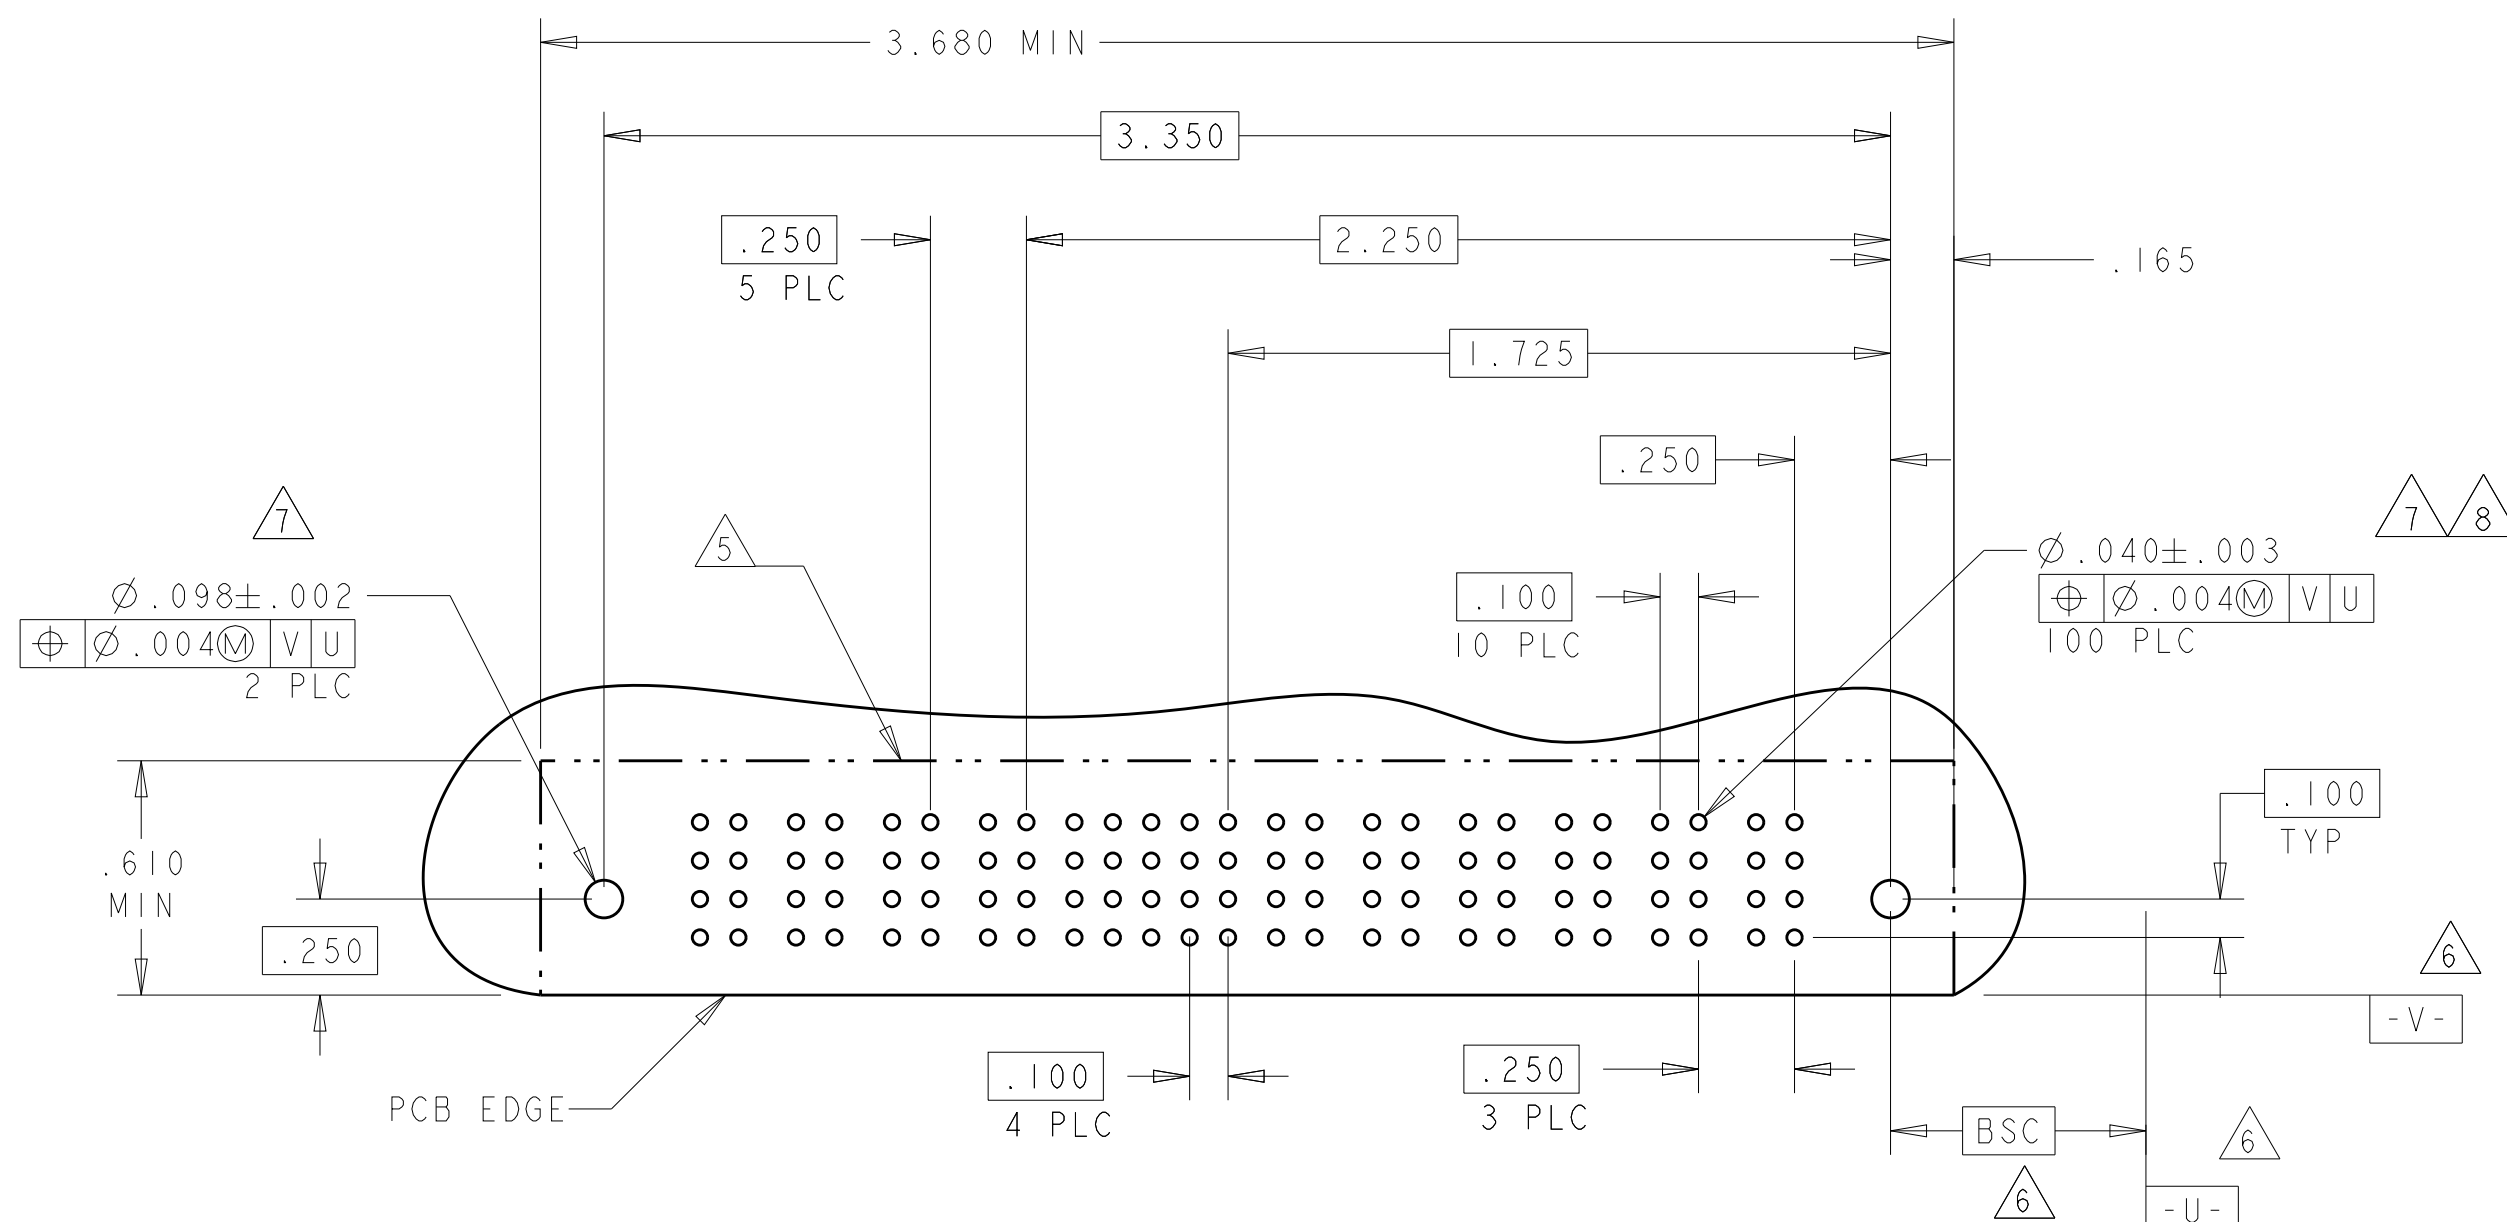4805 (3/11)


PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P4	P3	6	5	4	3	2	1	P2	P1	
I-6450160-0	D C B A		RA	RA	H	H	H	H	H	H	RA	RA	
					G	G	G	G	G	G			
					F	F	F	F	F	F			
					E	E	E	E	E	E			
2P + 24S + 2P													

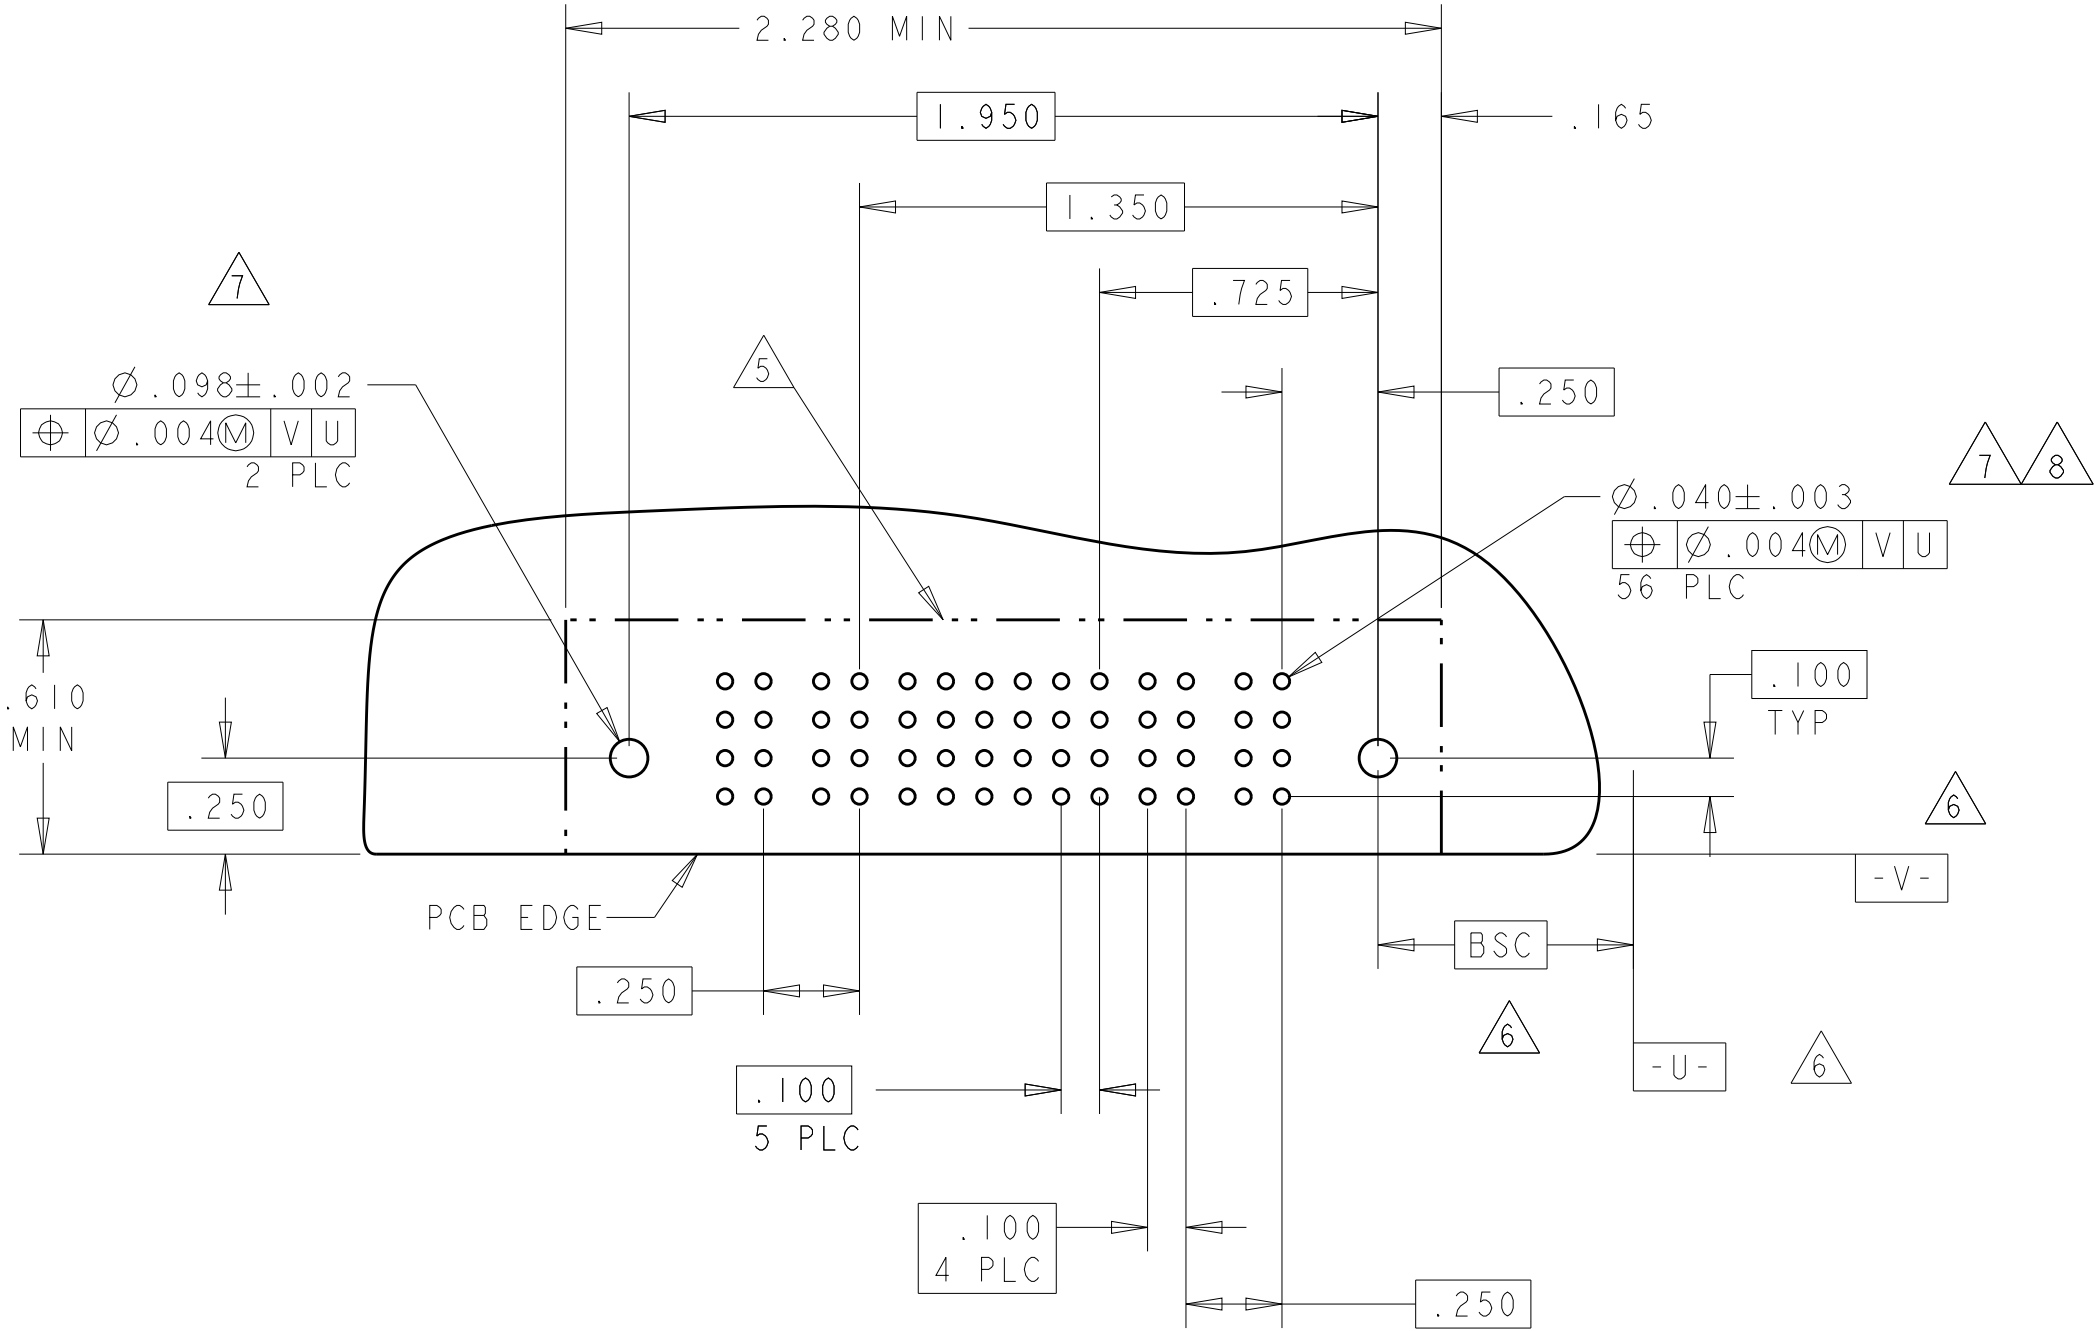


PART NUMBER	ROWS		POWER					SIGNAL			POWER	
			P6	P5	P4	P3	P2	3	2	1	P1	
I-6450160-1	D C B A	HD	RA	RA	RA	RA	H	H	H	RA	HD	
							G	G	G			
							F	F	F			
							E	E	E			
1P + 12S + 5P												

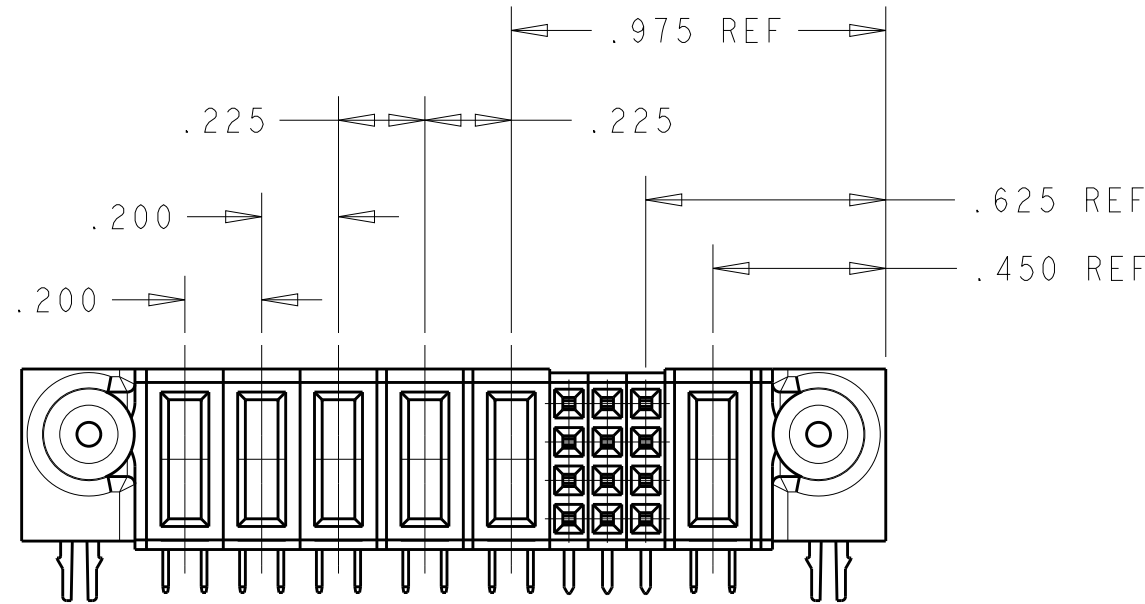

PART NUMBER	ROWS		SIGNAL							
			6	5	4	3	2	1		
I-6450160-2	D C B A		L	L	L	L	L	L		
			K	K	K	K	K	K		
			J	J	J	J	J	J		
			I	I	I	I	I	I		
		HD								HD
0P + 24S + 0P										

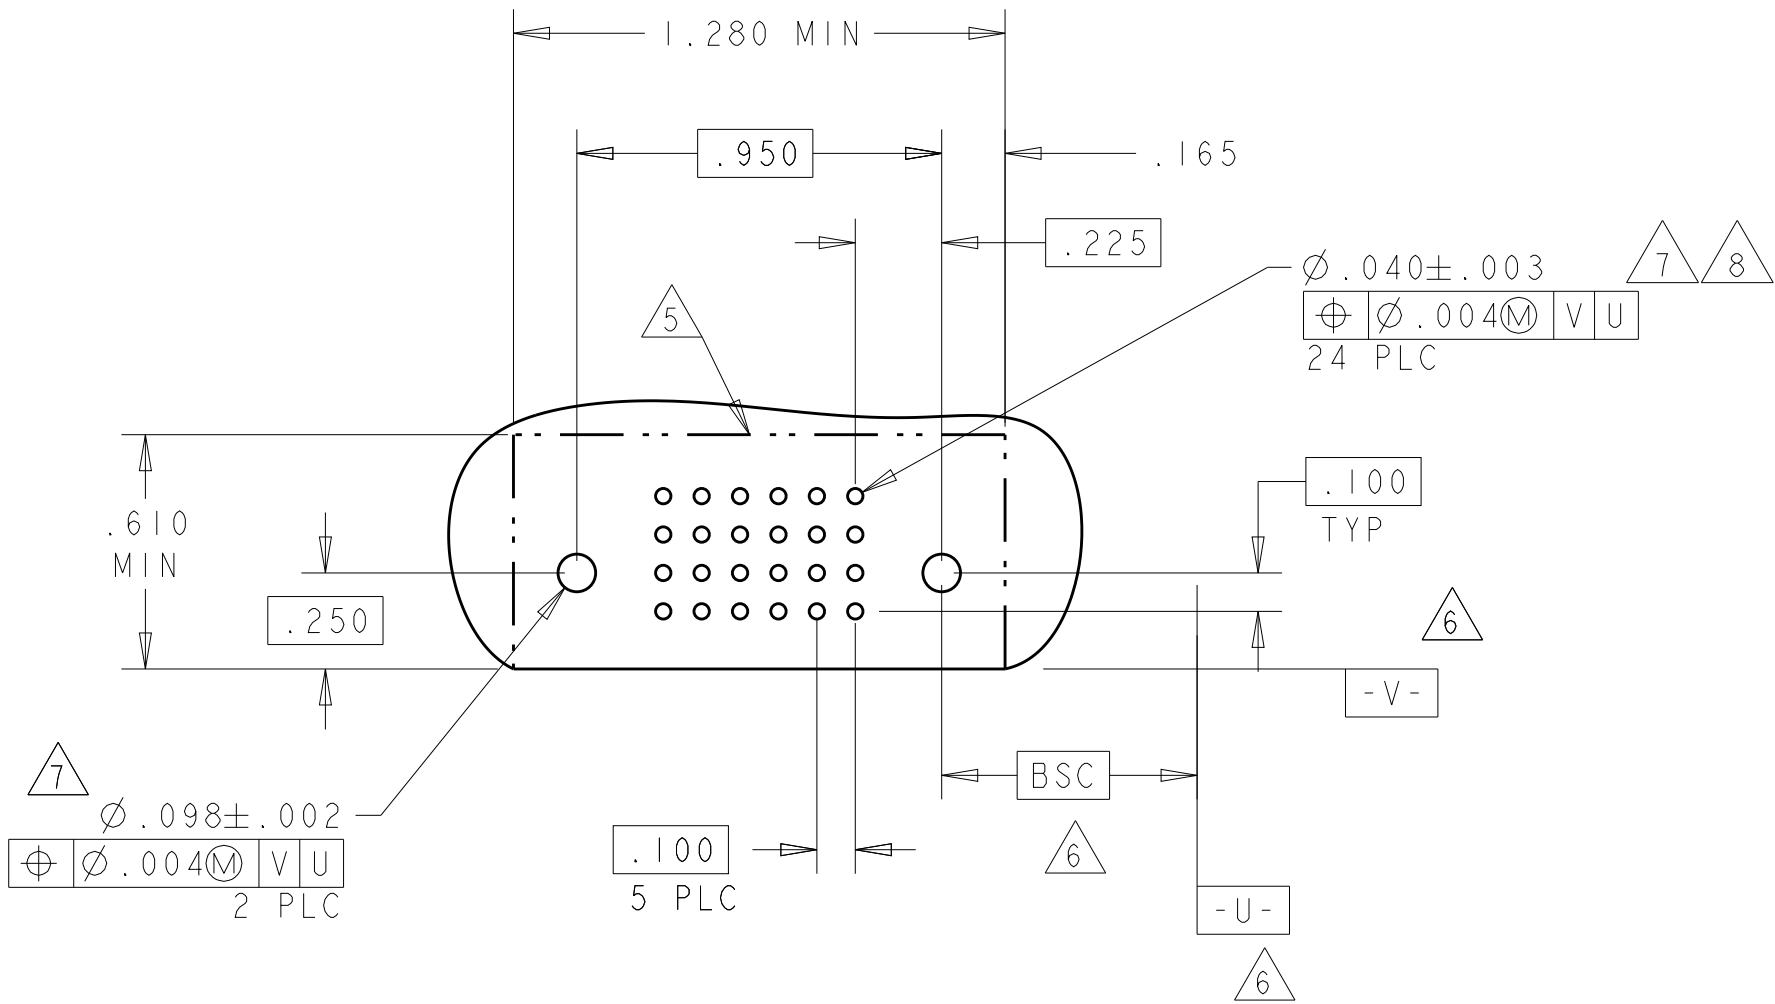

PART NUMBER	ROWS	POWER					SIGNAL					POWER					
		P10	P9	P8	P7		5	4	3	2	1	P6	P5	P4	P3	P2	P1
I-6450160-9	D C B A		RA	RA	RA	RA	H	H	H	H	H	RA	RA	RA	RA	RA	RA
							G	G	G	G	G						
							F	F	F	F	F						
							E	E	E	E	E						
6P + 20S + 4P																	

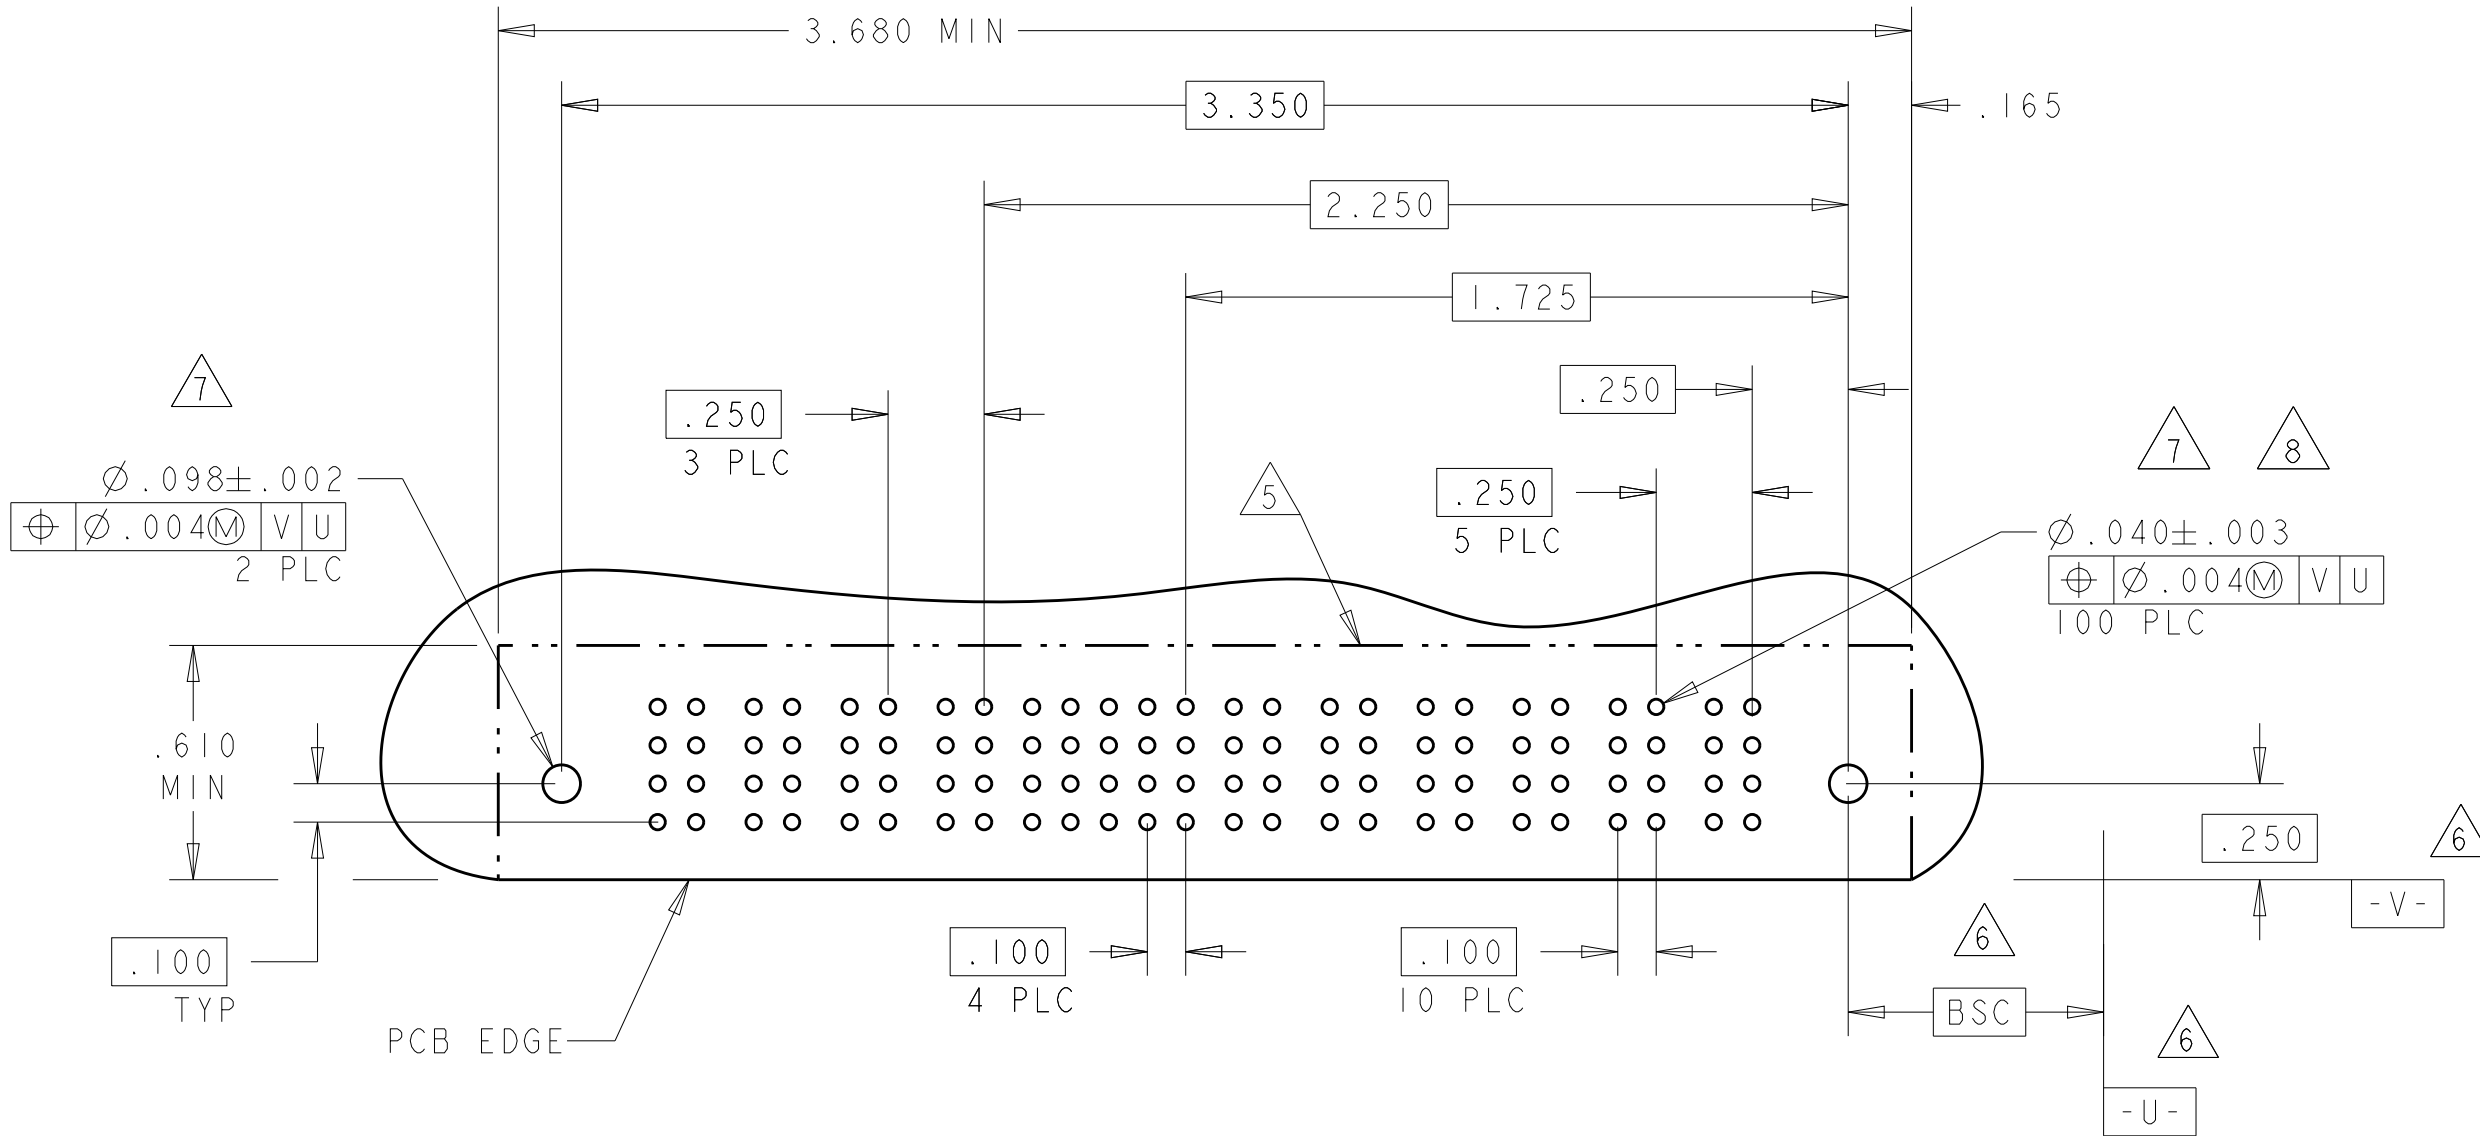

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN
R. GRZYBOWSKI
CHK
M. PERCHERKE
APVD
M. PERCHERKE

21FEB05
21FEB05
21FEB05

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.002
FINISH

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
Customer Drawing

NAME
RIGHT ANGLE RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450160

RESTRICTED TO
-

SCALE
4:1

SHEET
5

OF
16


REV
G1


TE Connectivity

TE

PART NUMBER	ROWS	POWER		SIGNAL							POWER		
		P4	P3	6	5	4	3	2	1	P2	P1		
2-6450160-5	D C B A	   	   	   	   	   	   	   	   	   	   		
2P + 24S + 2P			   	   	   	   	   	   	   	   	   	   	


PART NUMBER	ROWS		POWER		SIGNAL							POWER		
			P4	P3	6	5	4	3	2	1	P2	P1		
4-6450160-5	D C B A													
														

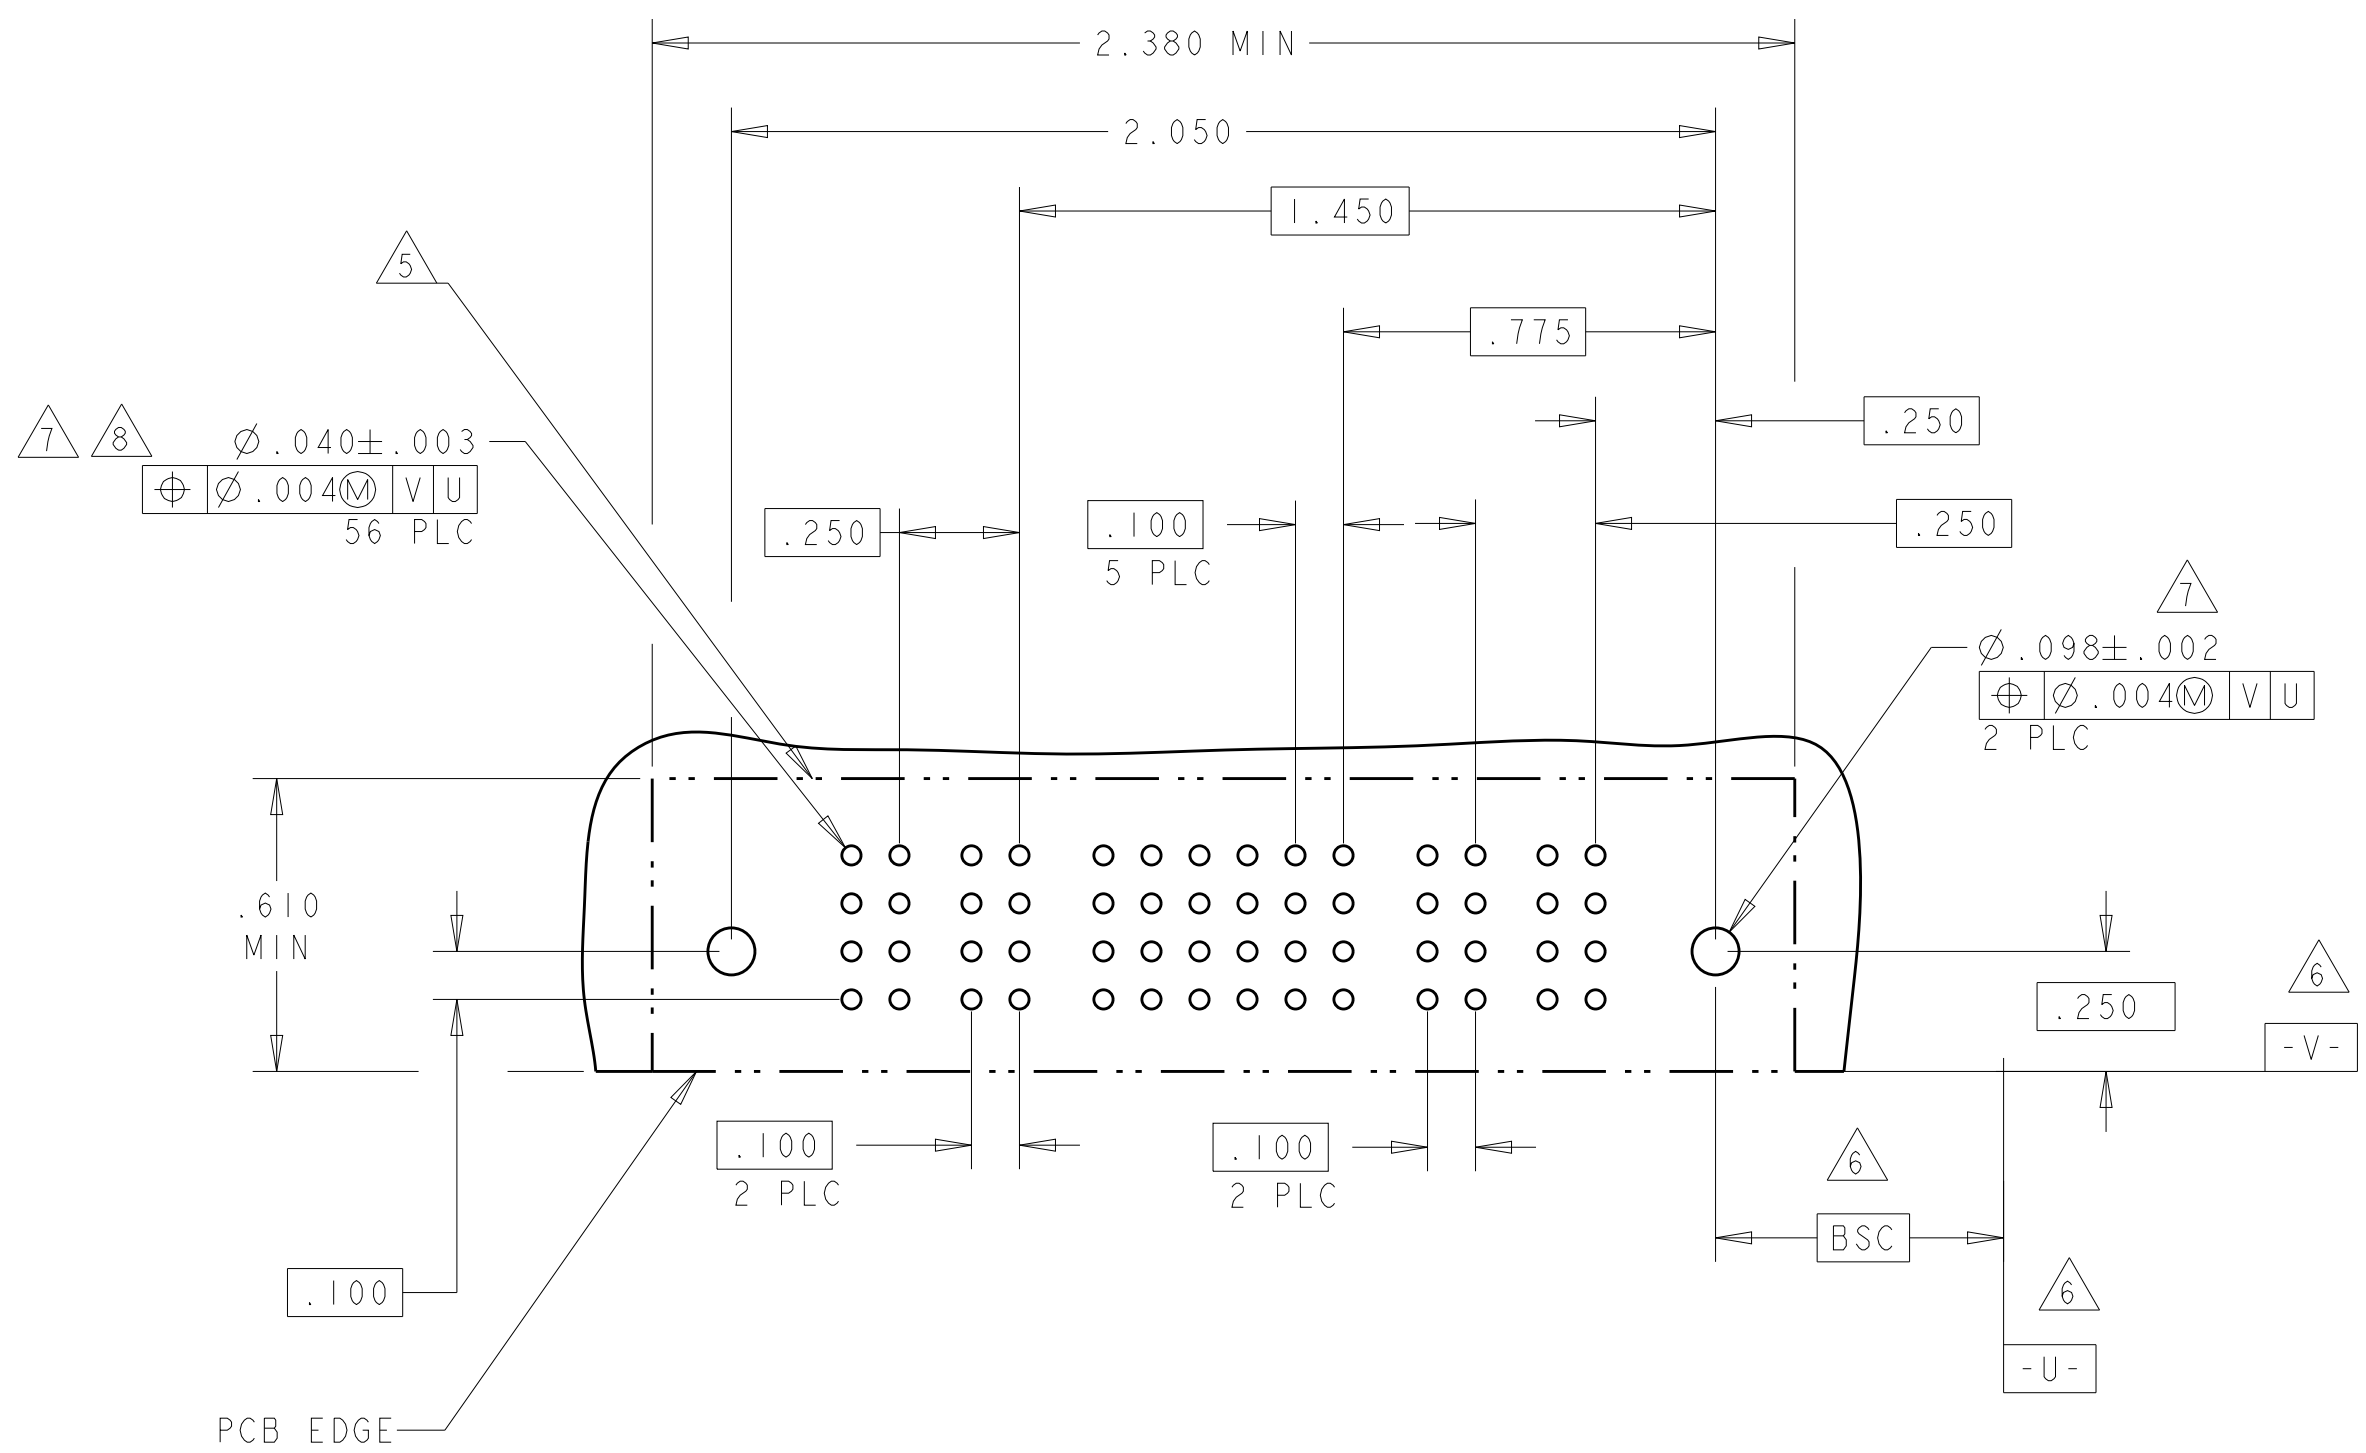


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Z. GRZYBOWSKI 21FE005		 TE Connectivity	
DIMENSIONS: INCHES		CHG M. PERCHERRE 21FE005			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		EVAL M. PERCHERRE 21FE005			
		PRODUCT SPEC 108-1973			
		APPLICATION SPEC 114-13038			
MATERIAL	FINISH	WEIGHT	SIZE CAGE CODE DRAWING NO		RESTRICTED TO
		-	A100779C-6450160		-
Customer Drawing			SCALE	4:1	SHEET 6 OF 16
			REV G		

LOC		DIST		REVISONS			
P	LYR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	


PART NUMBER	ROWS		POWER								SIGNAL							POWER				
			P12	P11	P10	P9	P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1		
2-6450160-9	D C B A		RM	RM	RM	RM	RM	RM	RM	RM	H	H	H	H	H	H	RM	RM	RM	RM		
											G	G	G	G	G	G						
											F	F	F	F	F	F						
											E	E	E	E	E	E						
4ACP + 24S + 8P																						

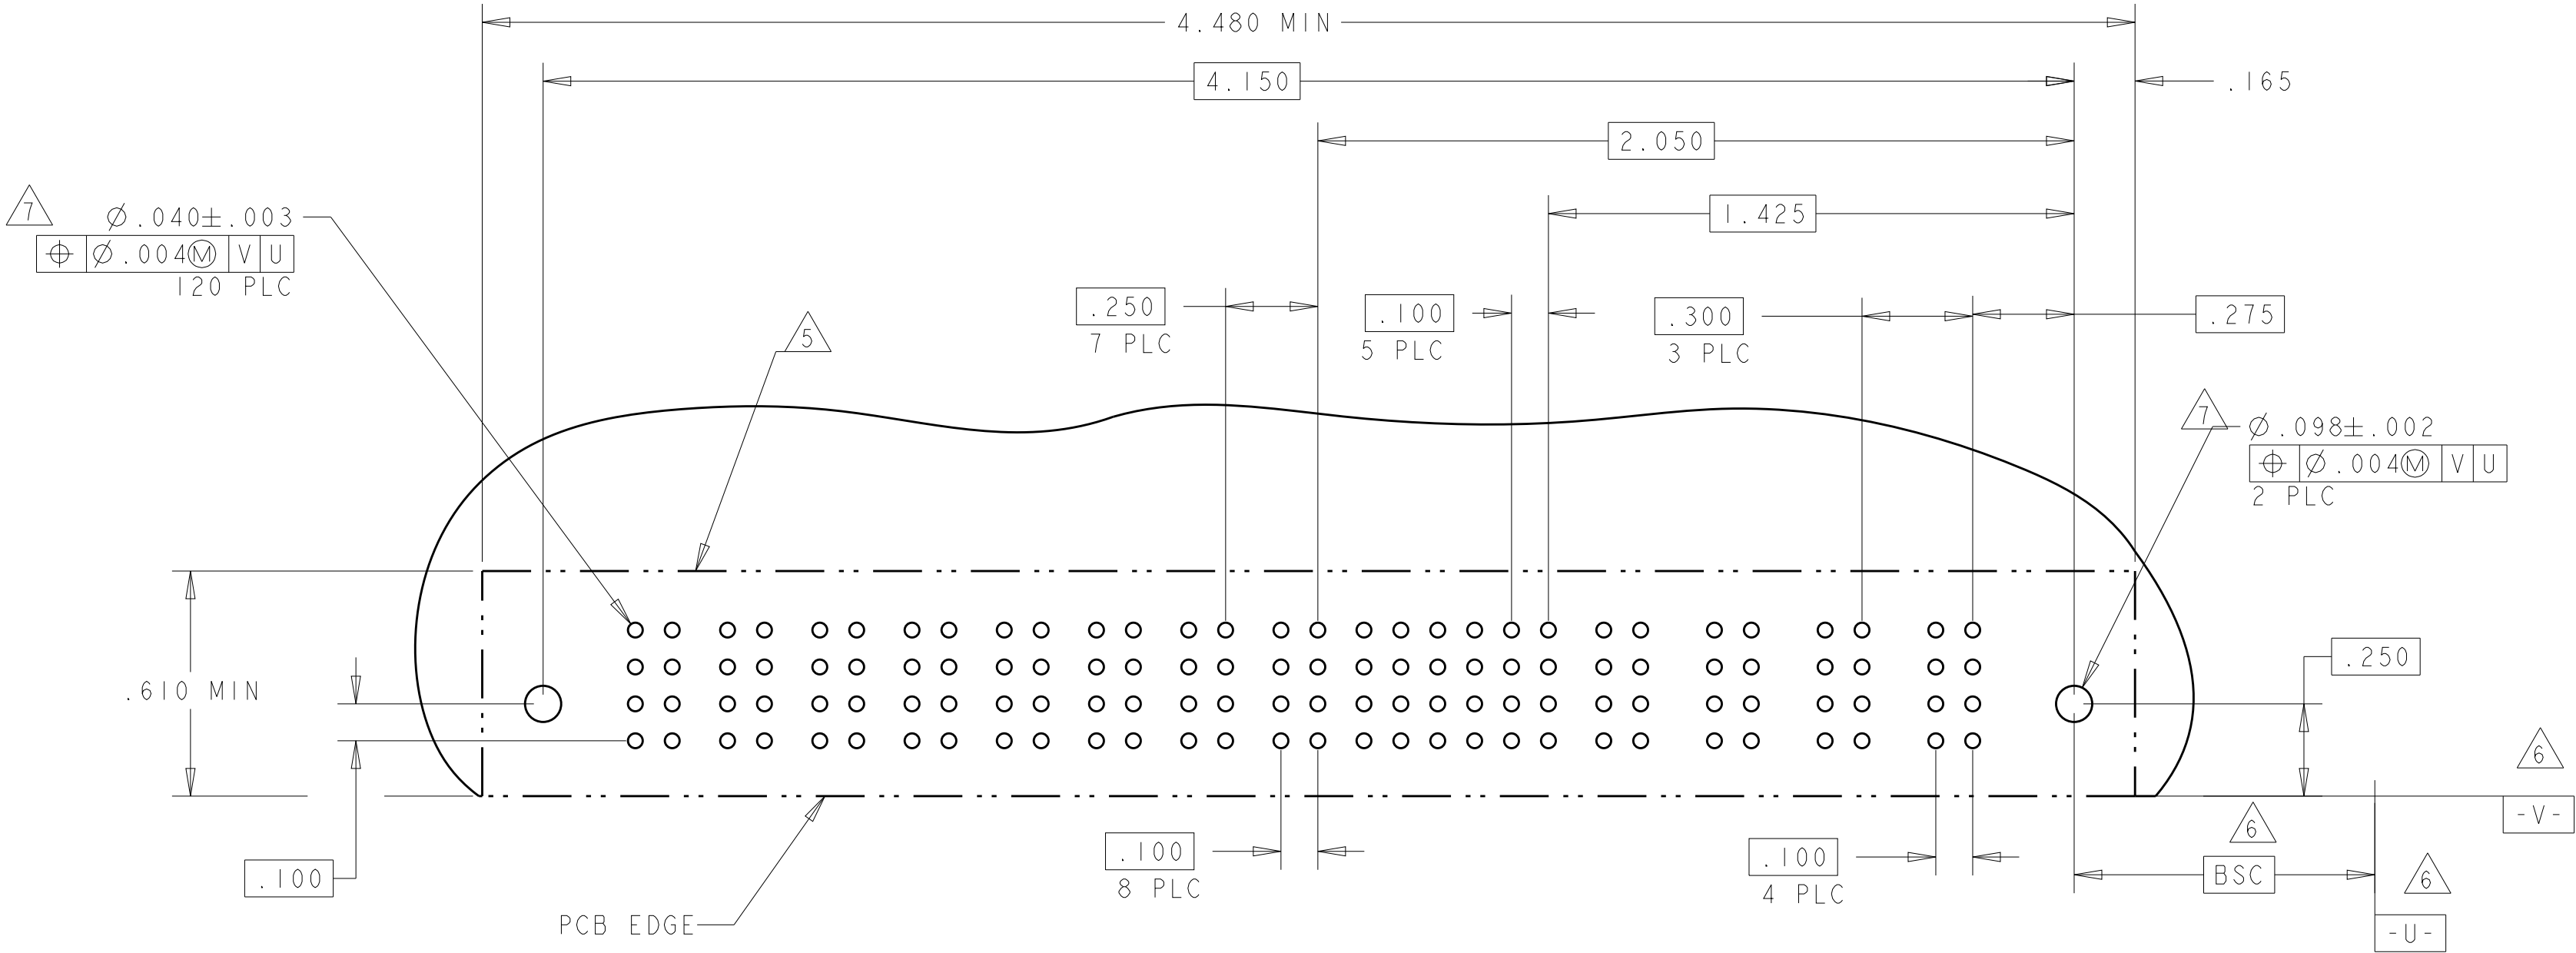


PART NUMBER	ROWS		POWER		SIGNAL				POWER			
			P4	P3	4	3	2	1	P2	P1		
3-6450160-1	D C B A		RM	RM	H	H	H	H	RM	RM		
					G	G	G	G				
					F	F	F	F				
					E	E	E	E				
2P + 16S + 2P												

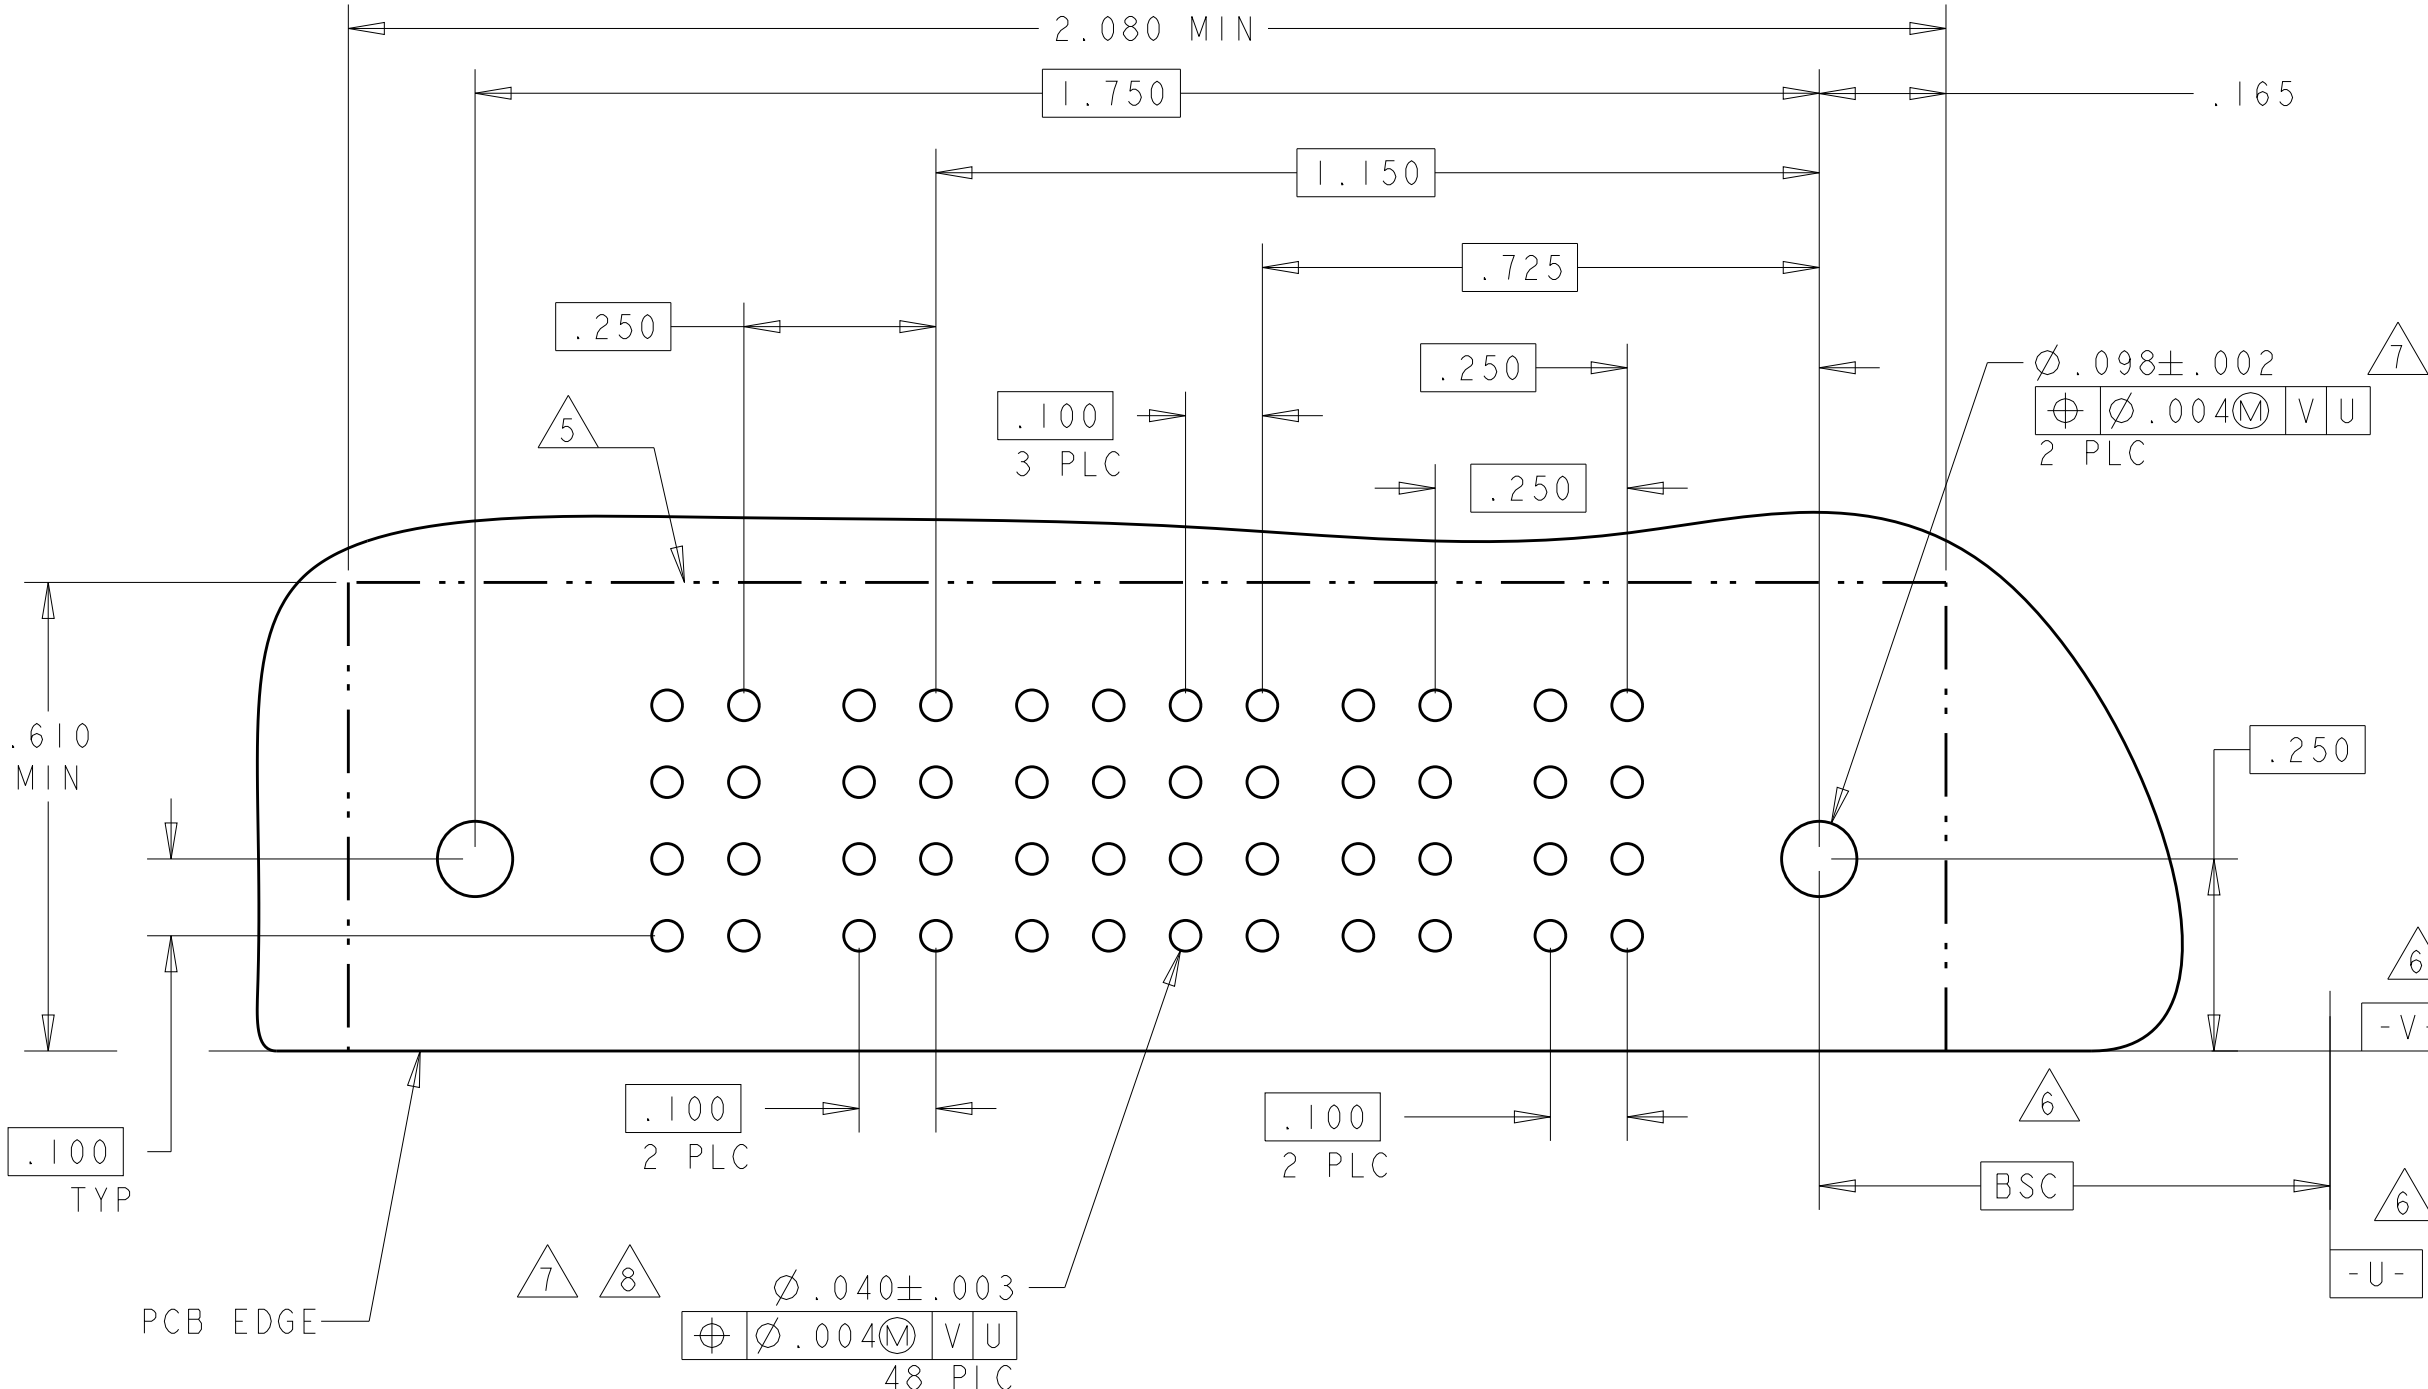

PART NUMBER	ROWS		POWER					SIGNAL						POWER								
			P12	P11	P10	P9		6	5	4	3	2	1	P8	P7	P6	P5	P4	P3	P2	P1	
3-6450160-0	D C B A							H	H	H	H	H	H									
								G	G	G	G	G	G									
								F	F	F	F	F	F									
								E	E	E	E	E	E									
8P + 24S + 1M + 4ACP																						

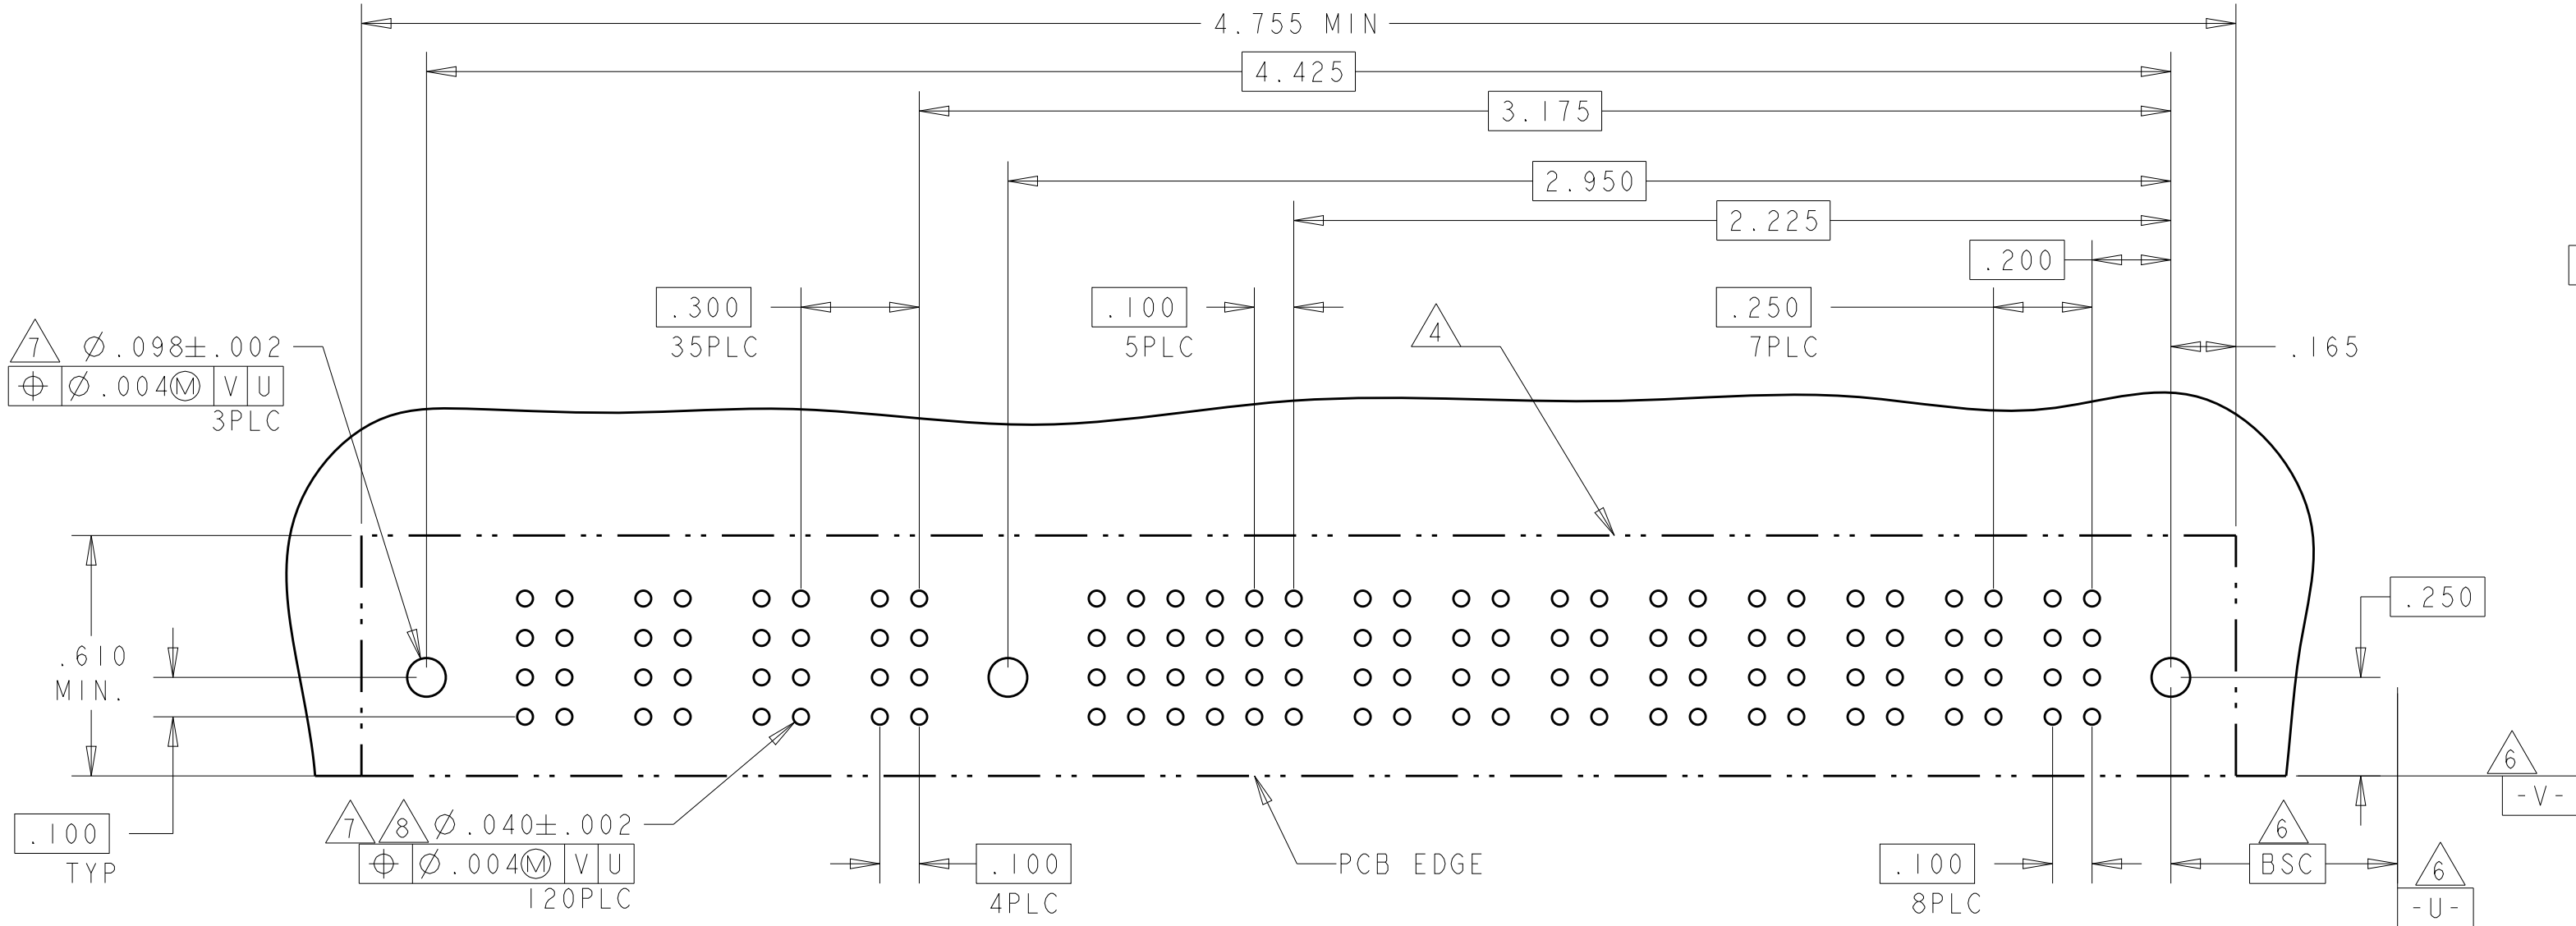

PART NUMBER	HOUSING P/N	ROWS		POWER			SIGNAL						POWER				
				P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
3-6450160-2	3-1450190-2	D C B A		RM	RM	RM	H	H	H	H	H	H	RM	RM	RM	RM	
							G	G	G	G	G	G					
							F	F	F	F	F	F					
							E	E	E	E	E	E					
4P + 24S + 3ACP																	

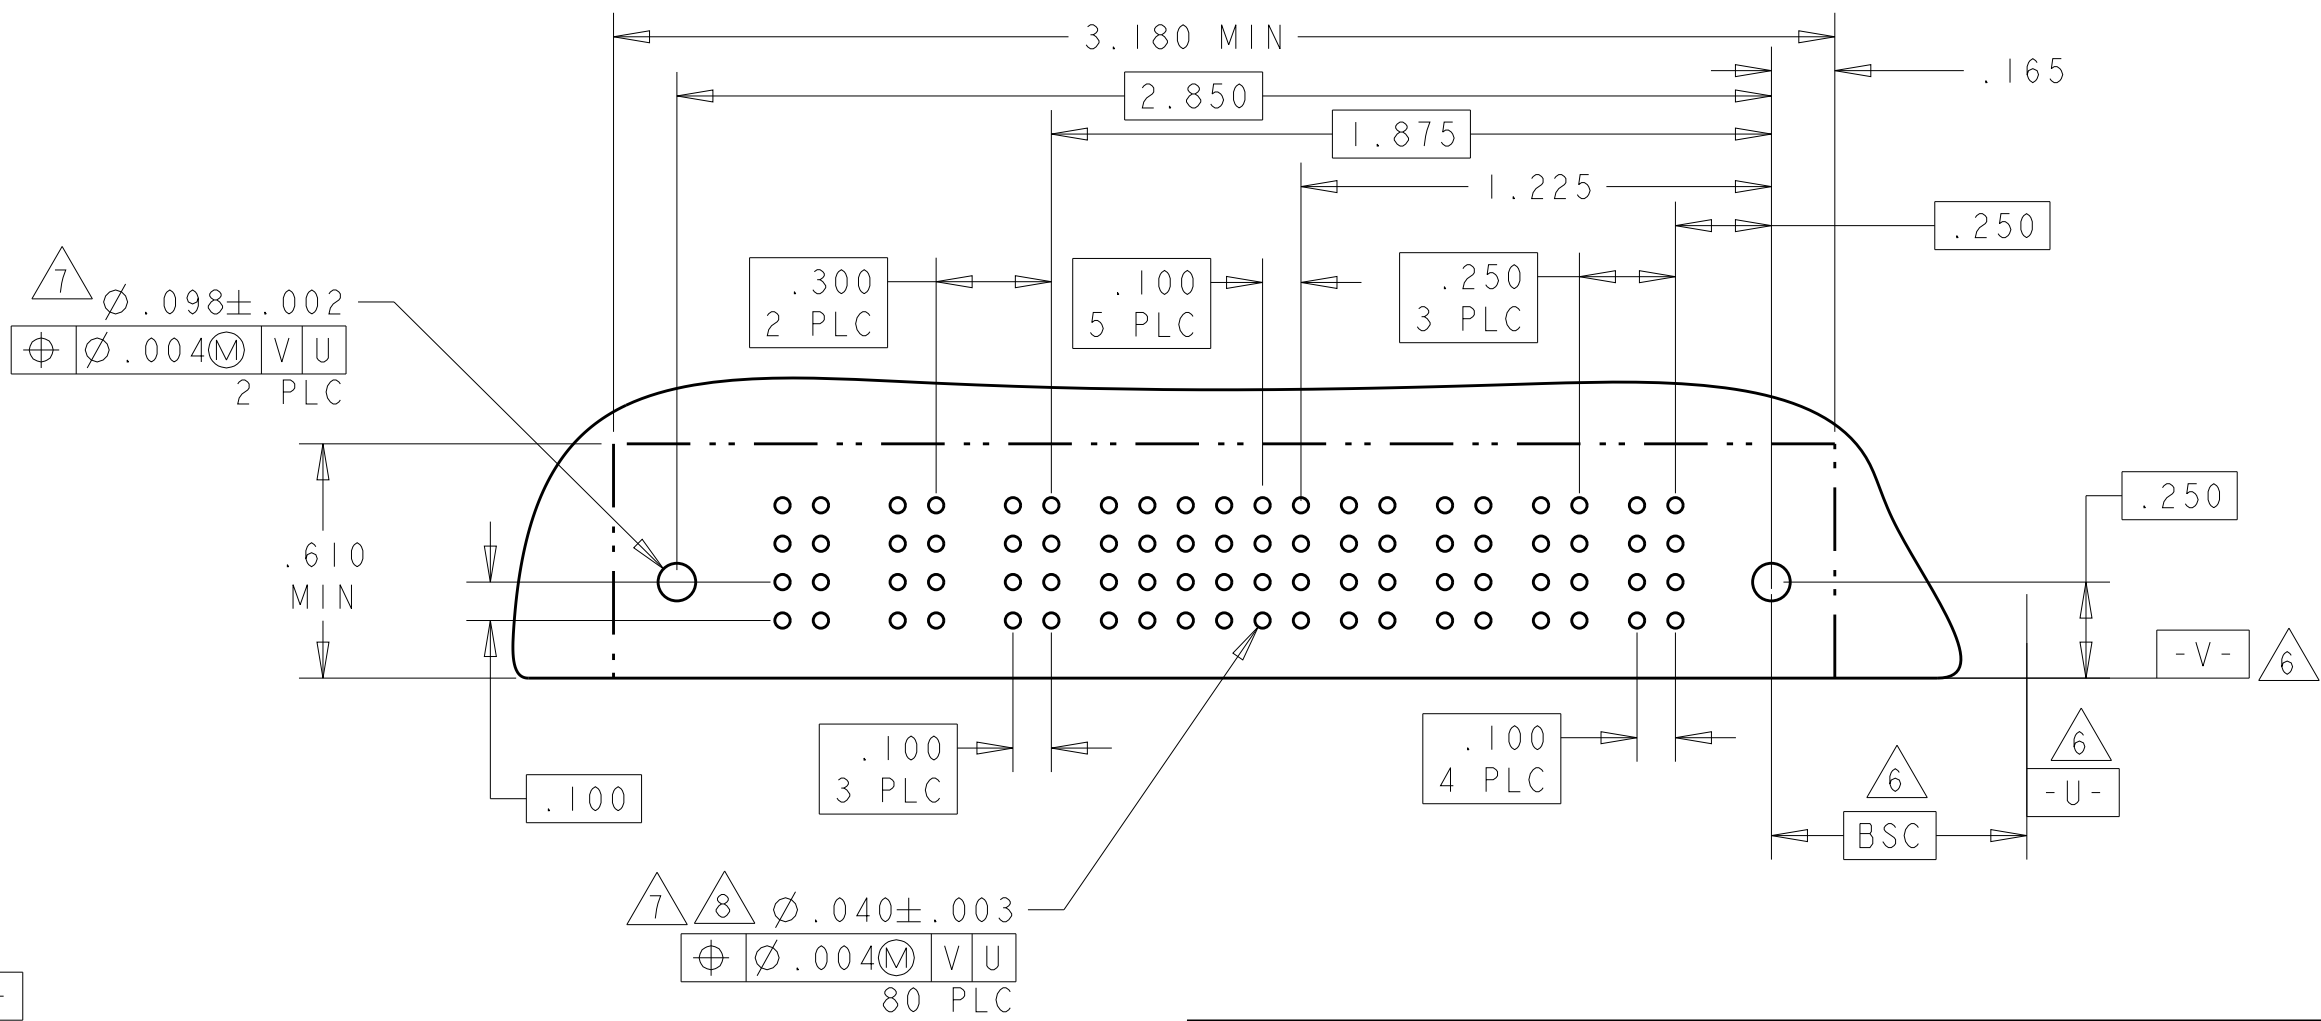

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R. GRZYBOWSKI
CHK
M. PERCHERKE
APVD
M. PERCHERKE

21FEB05
21FEB05
21FEB05

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.002

FINISH

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038

WEIGHT

Customer Drawing

NAME
RIGHT ANGLE RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO.
C=6450160

RESTRICTED TO
-


SCALE
3:1

SHEET
7


OF
16


REV
G1


TE Connectivity

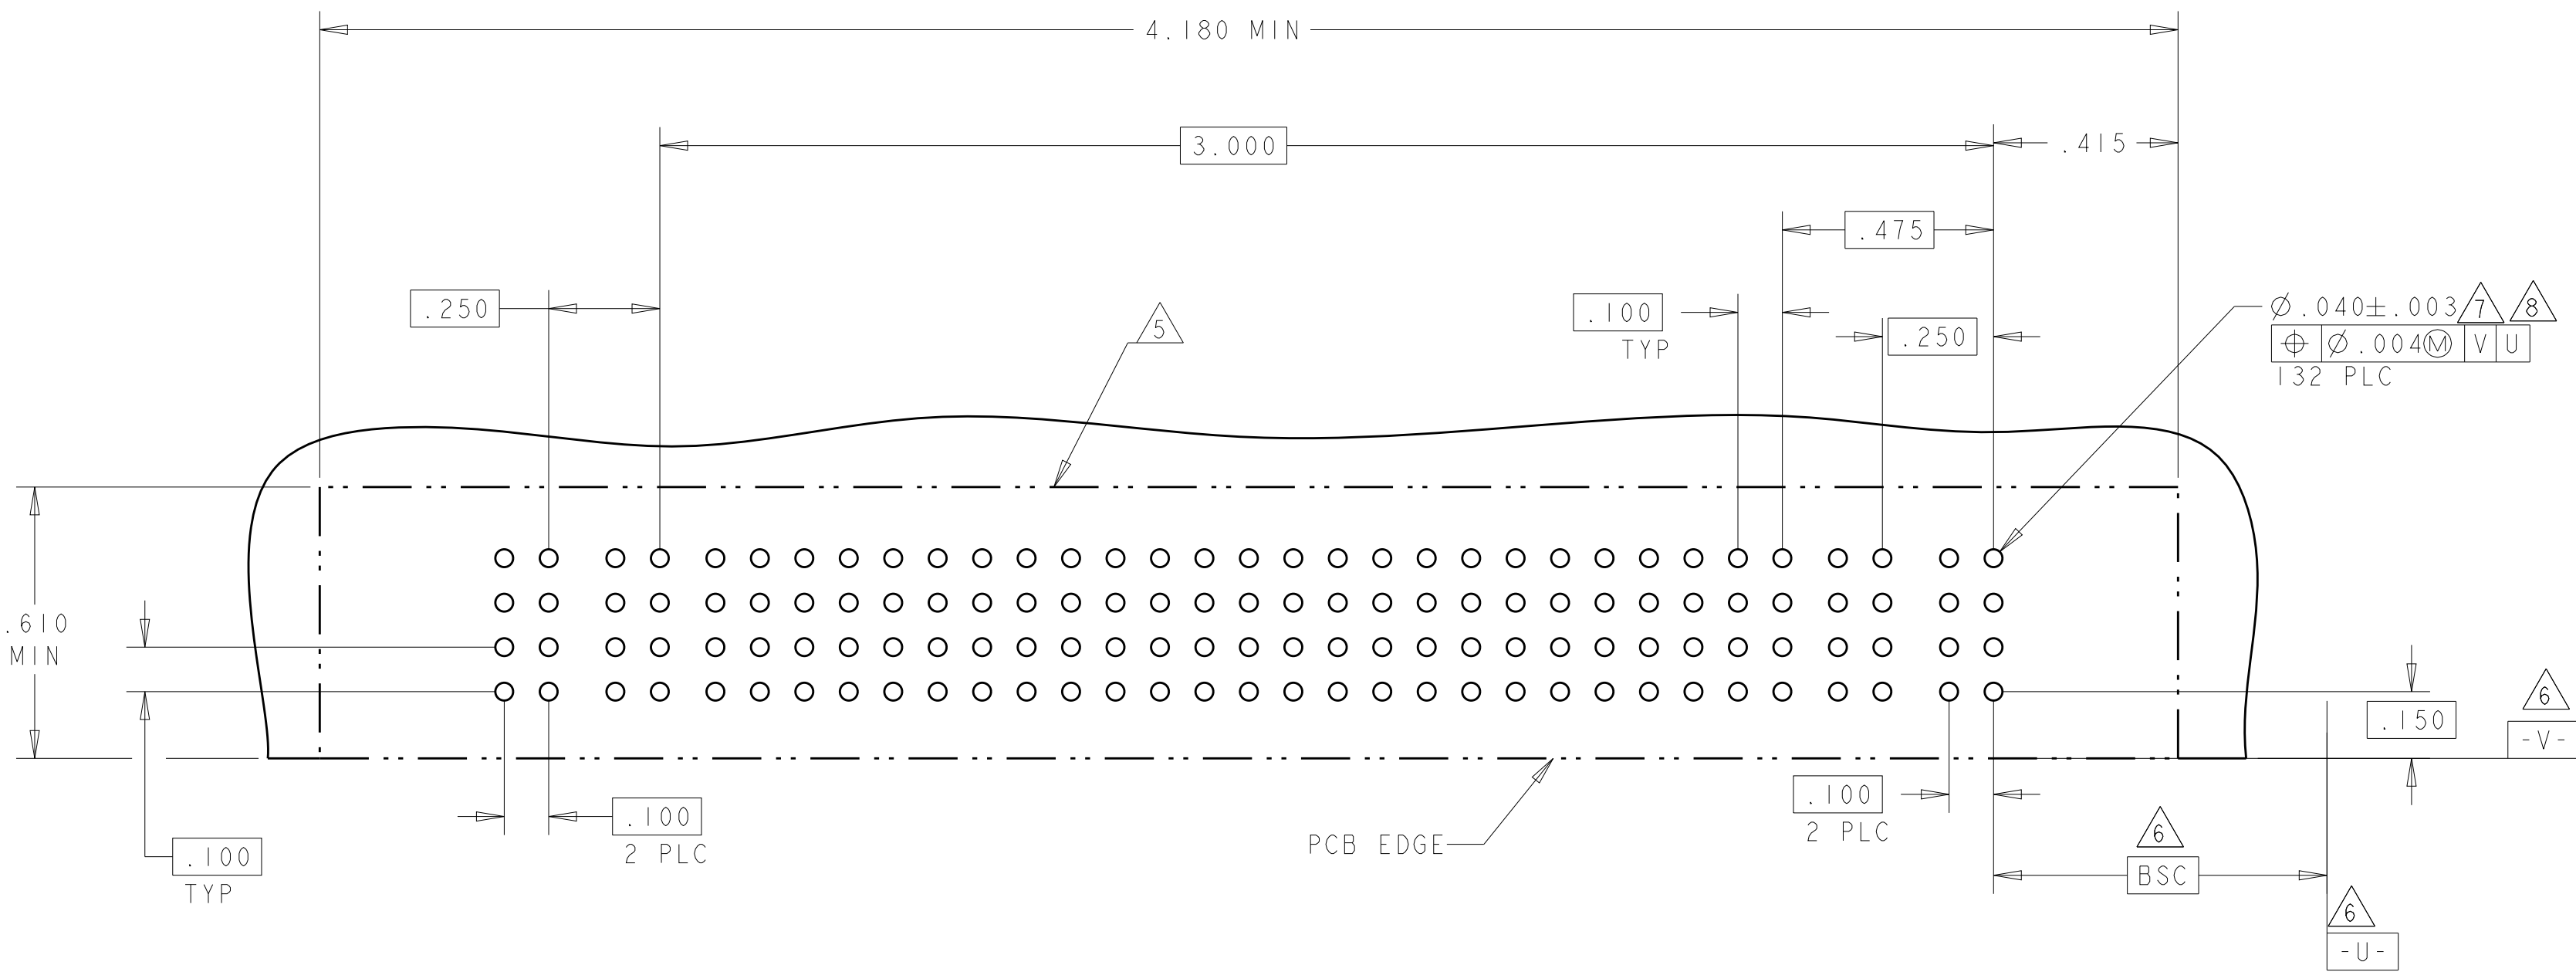

PART NUMBER	ROWS		POWER				SIGNAL					POWER				
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	
3-6450160-7	D C B A	HD														HD
4P + 24S + 4P																

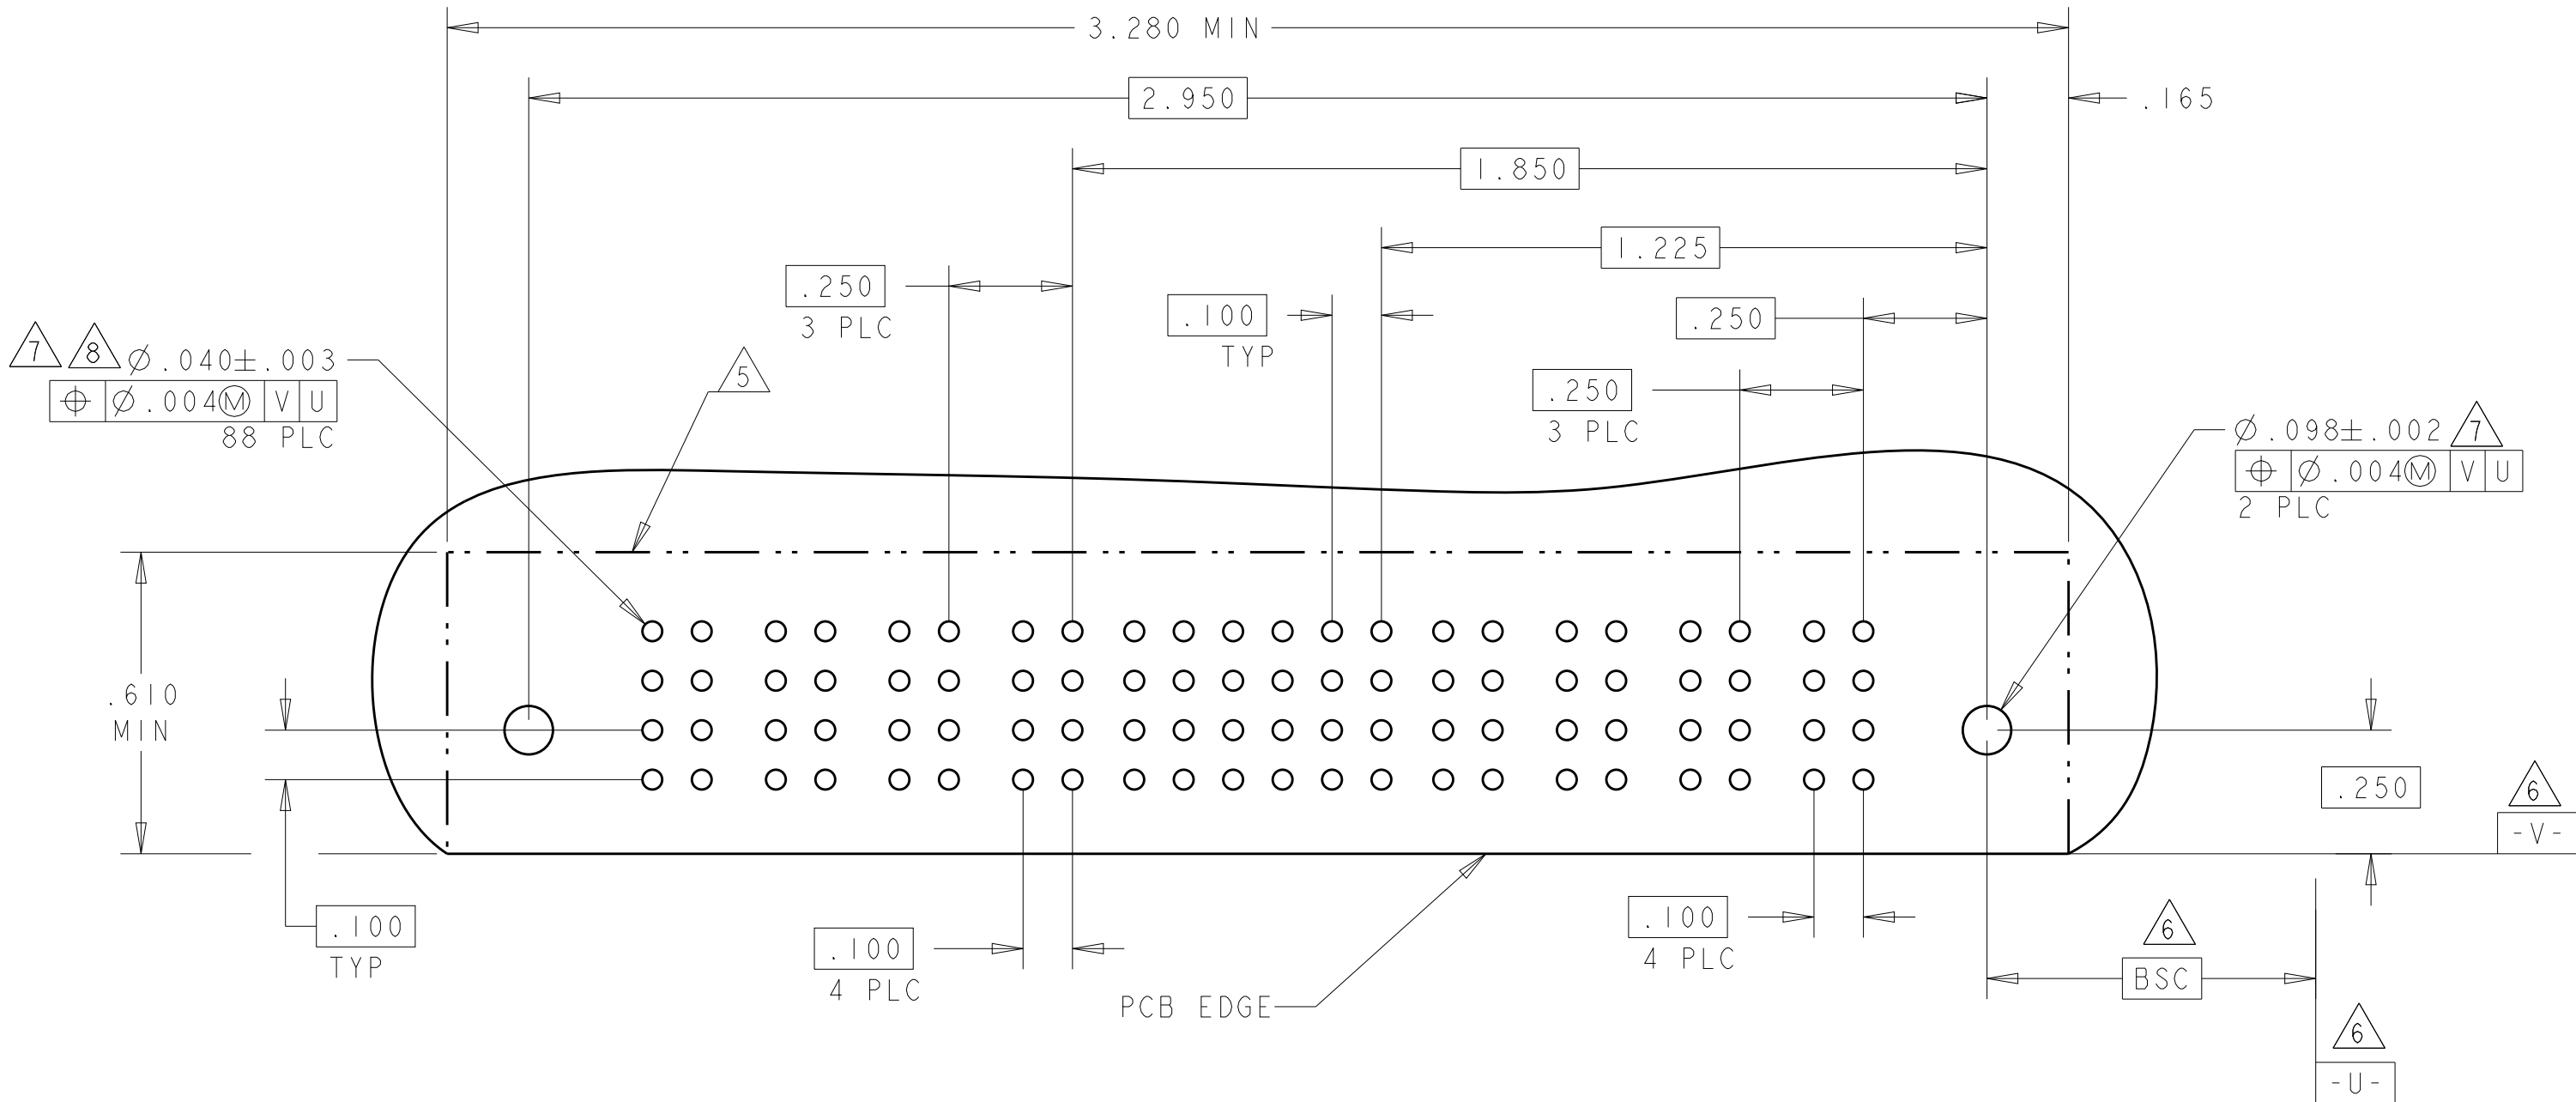4805 (3/11)


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWA R. GRZYBOWSKI		21FE0B05		 TE Connectivity			
		CMP M. PERCHERKE		21FE0B05					
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME		RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL			
		0 PLC ±.01 1 PLC ±.01 2 PLC ±.005 4 PLC ±.002 ANGLES ±.02		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038					
		MATERIAL		FINISH		WEIGHT -		SIZE CASE CODE DRAWING NO A1 00779 C-6450160	
				Customer Drawing		SCALE 3:1 SHEET 10 OF 16 REV G			

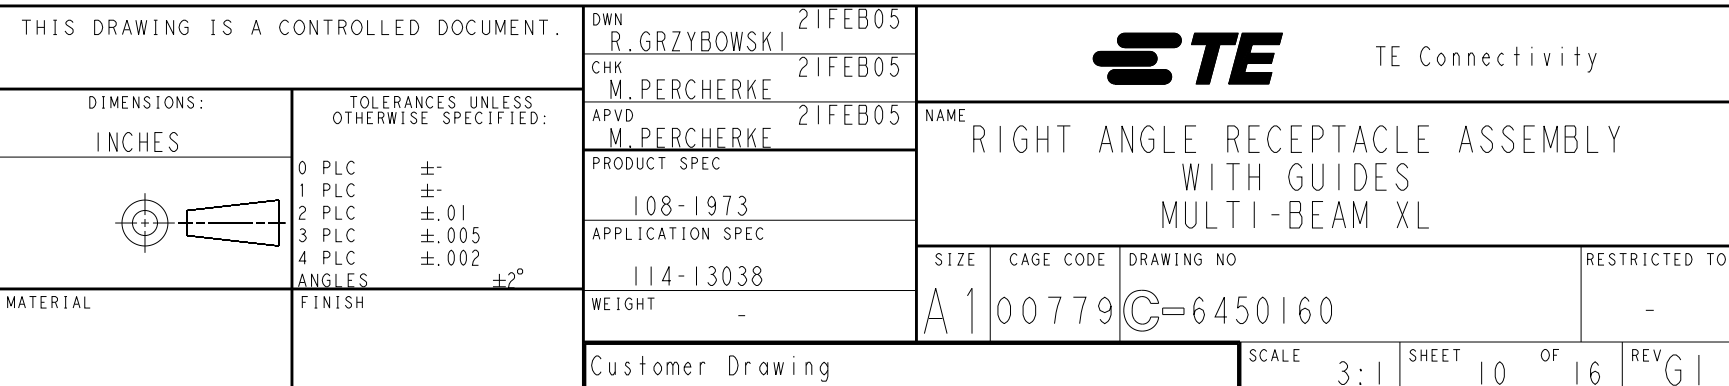

4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER								SIGNAL				POWER								
			P16	P15	P14	P13	P12	P11	P10	P9	4	3	2	1	P8	P7	P6	P5	P4	P3	P2	P1	
3-6450160-9	D										H	H	H	H									
	C										G	G	G	G									
	B										F	F	F	F									
	A	HD									E	E	E	E									HD
8P + 16S + 8P																							


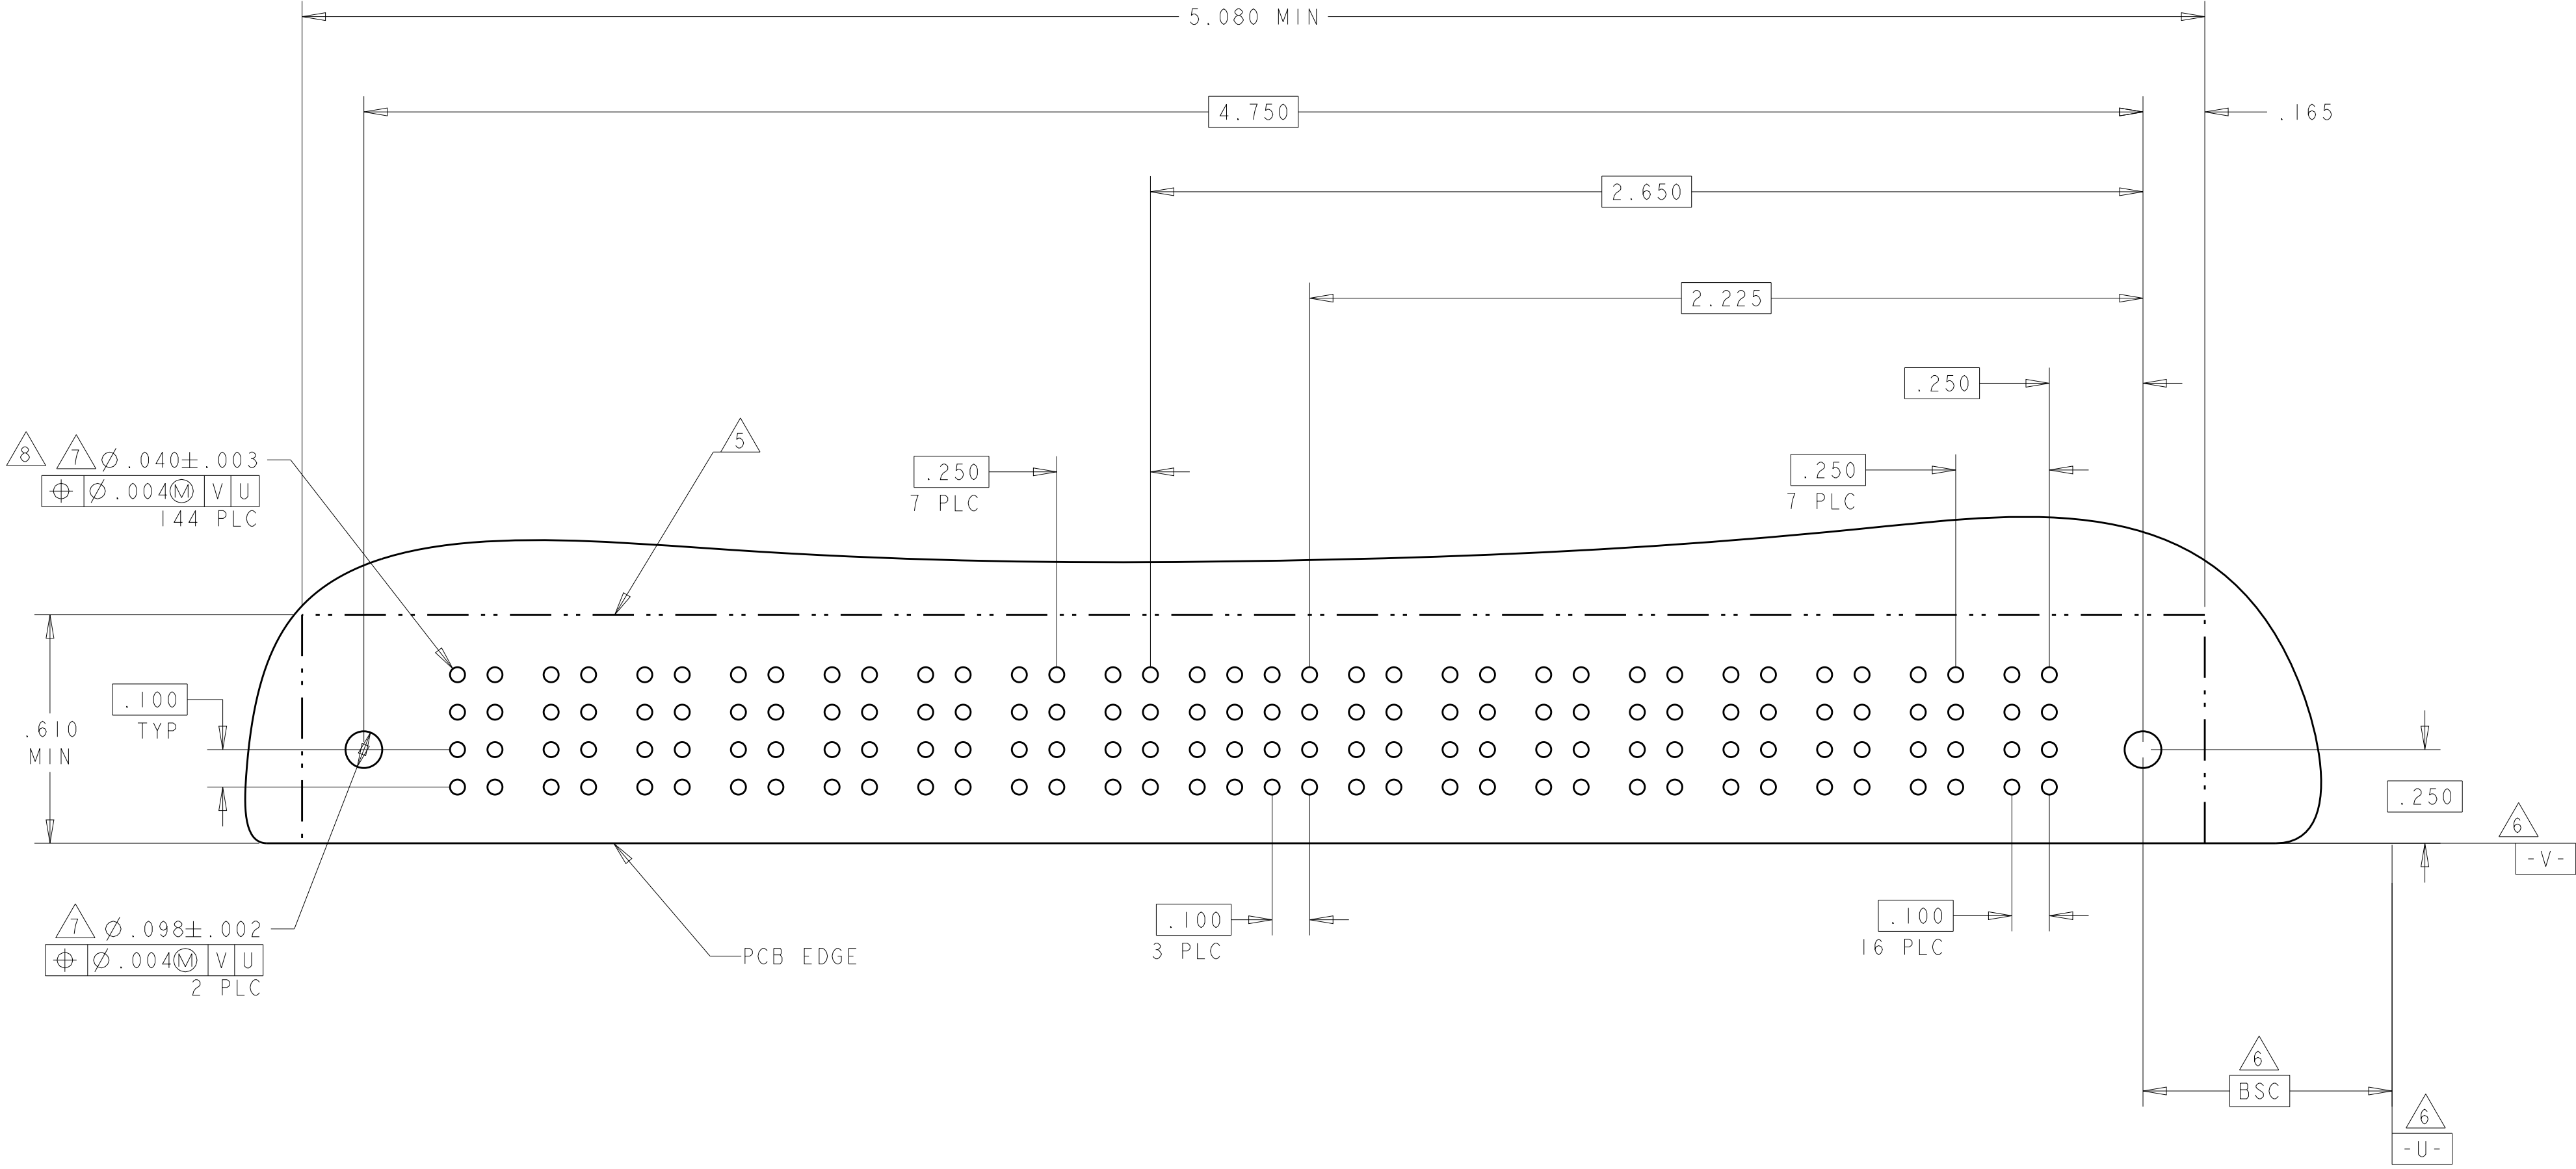



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI	21FEB05	TE Connectivity	
		CHK M.PERCHEKKE	21FEB05		
DIMENSIONS: INCHES		APVD M.PERCHEKKE	21FEB05	NAME RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		SIZE A1	
		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.002 ANGLES #2° FINISH		CAGE CODE 108-1973	
MATERIAL		APPLICATION SPEC 114-13038		DRAWING NO 6450160	
		WEIGHT -		RESTRICTED TO -	
		Customer Drawing		SCALE 3:1	
				SHEET 12	
				OF 16	
				REV G1	

LOC		DIST		REVISONS				
GP		00		P	LTR	DESCRIPTION		DATE
						SEE SHEET 1		

PART NUMBER	ROWS		POWER				SIGNAL						POWER		
			P6	P5	P4	P3	6	5	4	3	2	1	P2	P1	
4-6450160-0	D		RM	RM	RM	RM	H	H	H	H	H	H	RM	RM	
	C						G	G	G	G	G	G			
	B						F	F	F	F	F	F			
	A	HD					E	E	E	E	E	E			
2P + 24S + 4P															


PART NUMBER	ROWS		POWER		SIGNAL			POWER		
			P2	3	2	1	P1			
4-6450160-1	D			H	H	H				
	G			G	G					
	F			F	F					
	A			E	E	E				
1P + 12S + 1P										

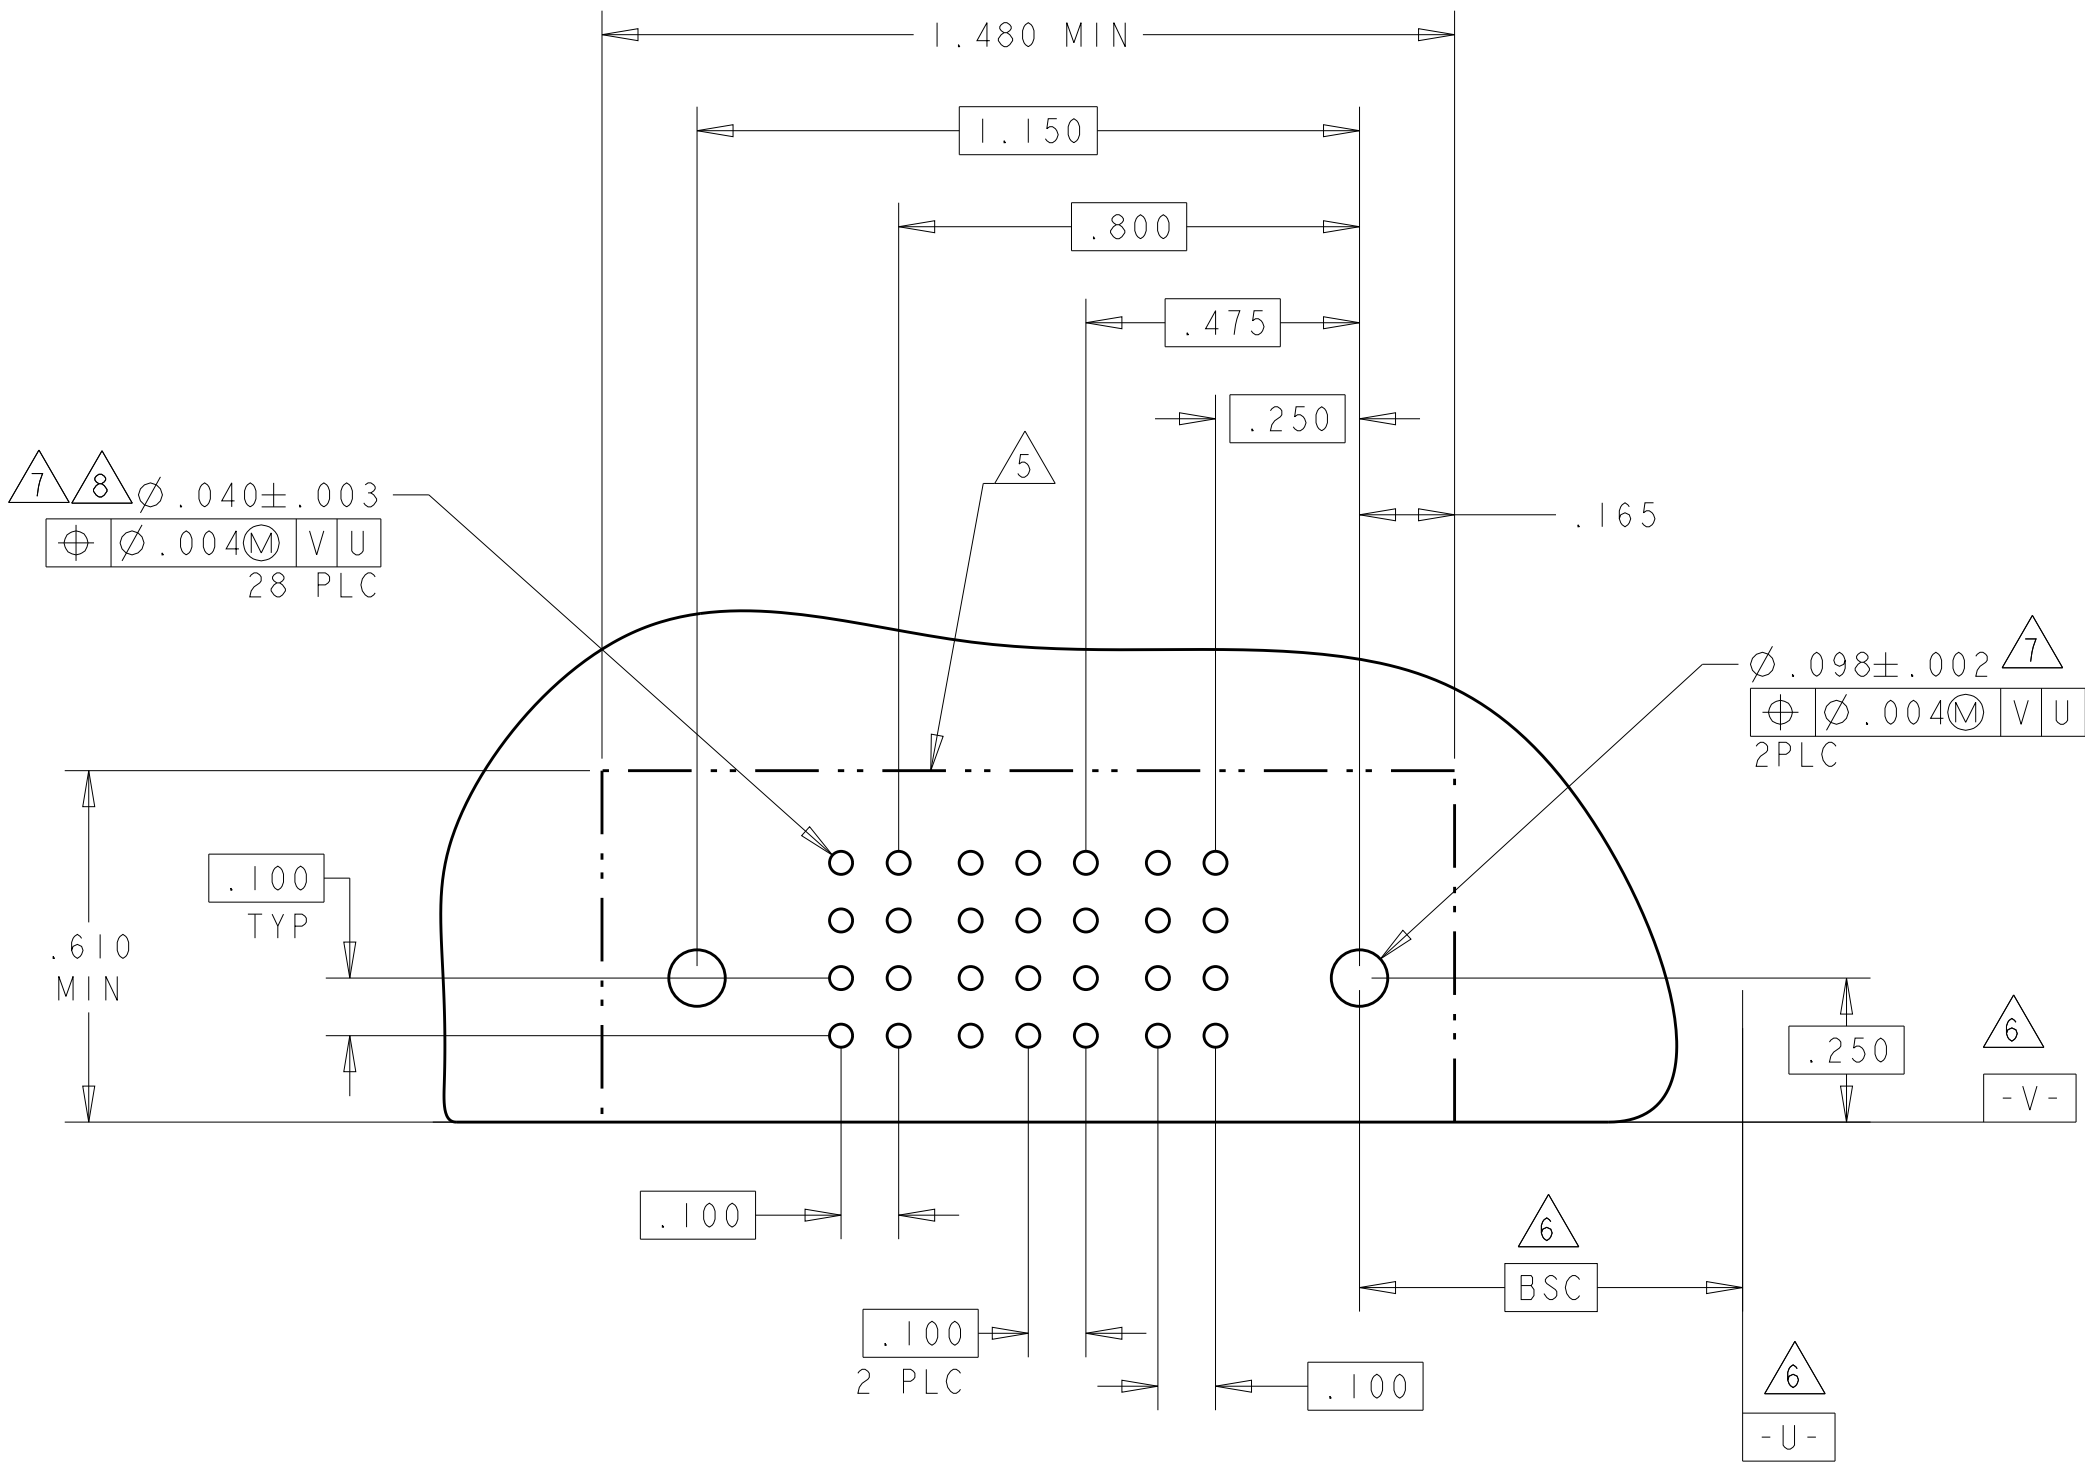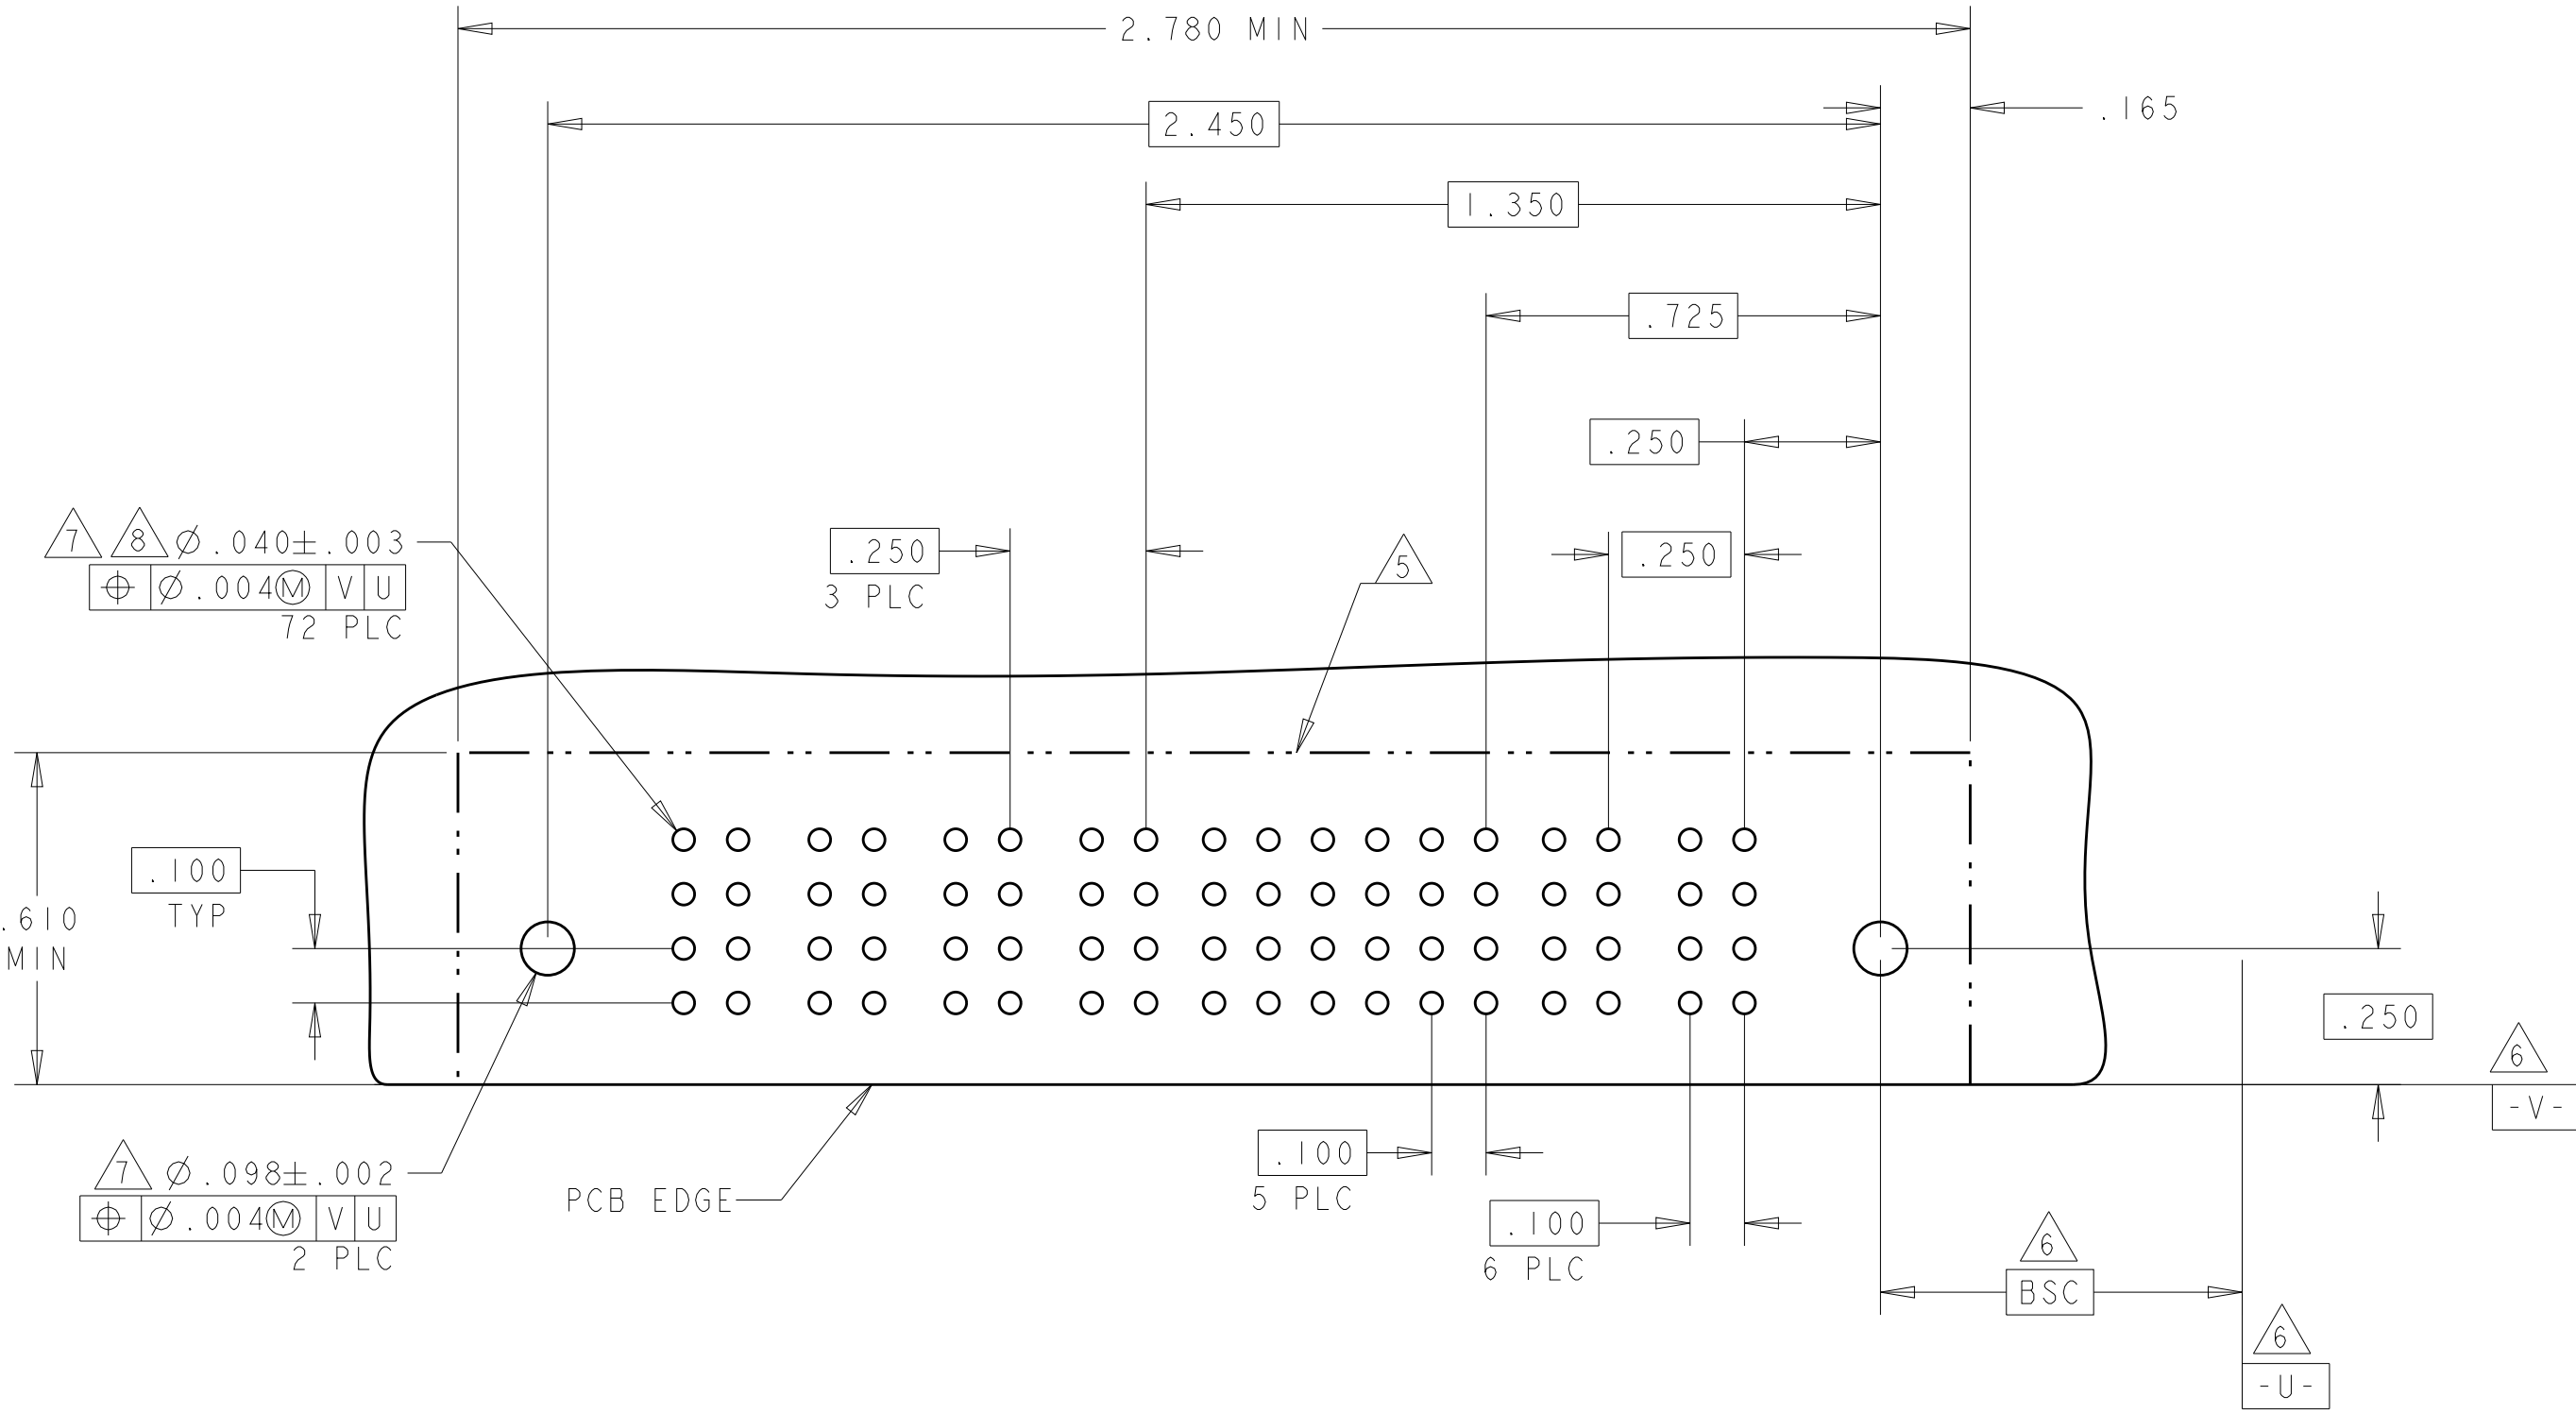

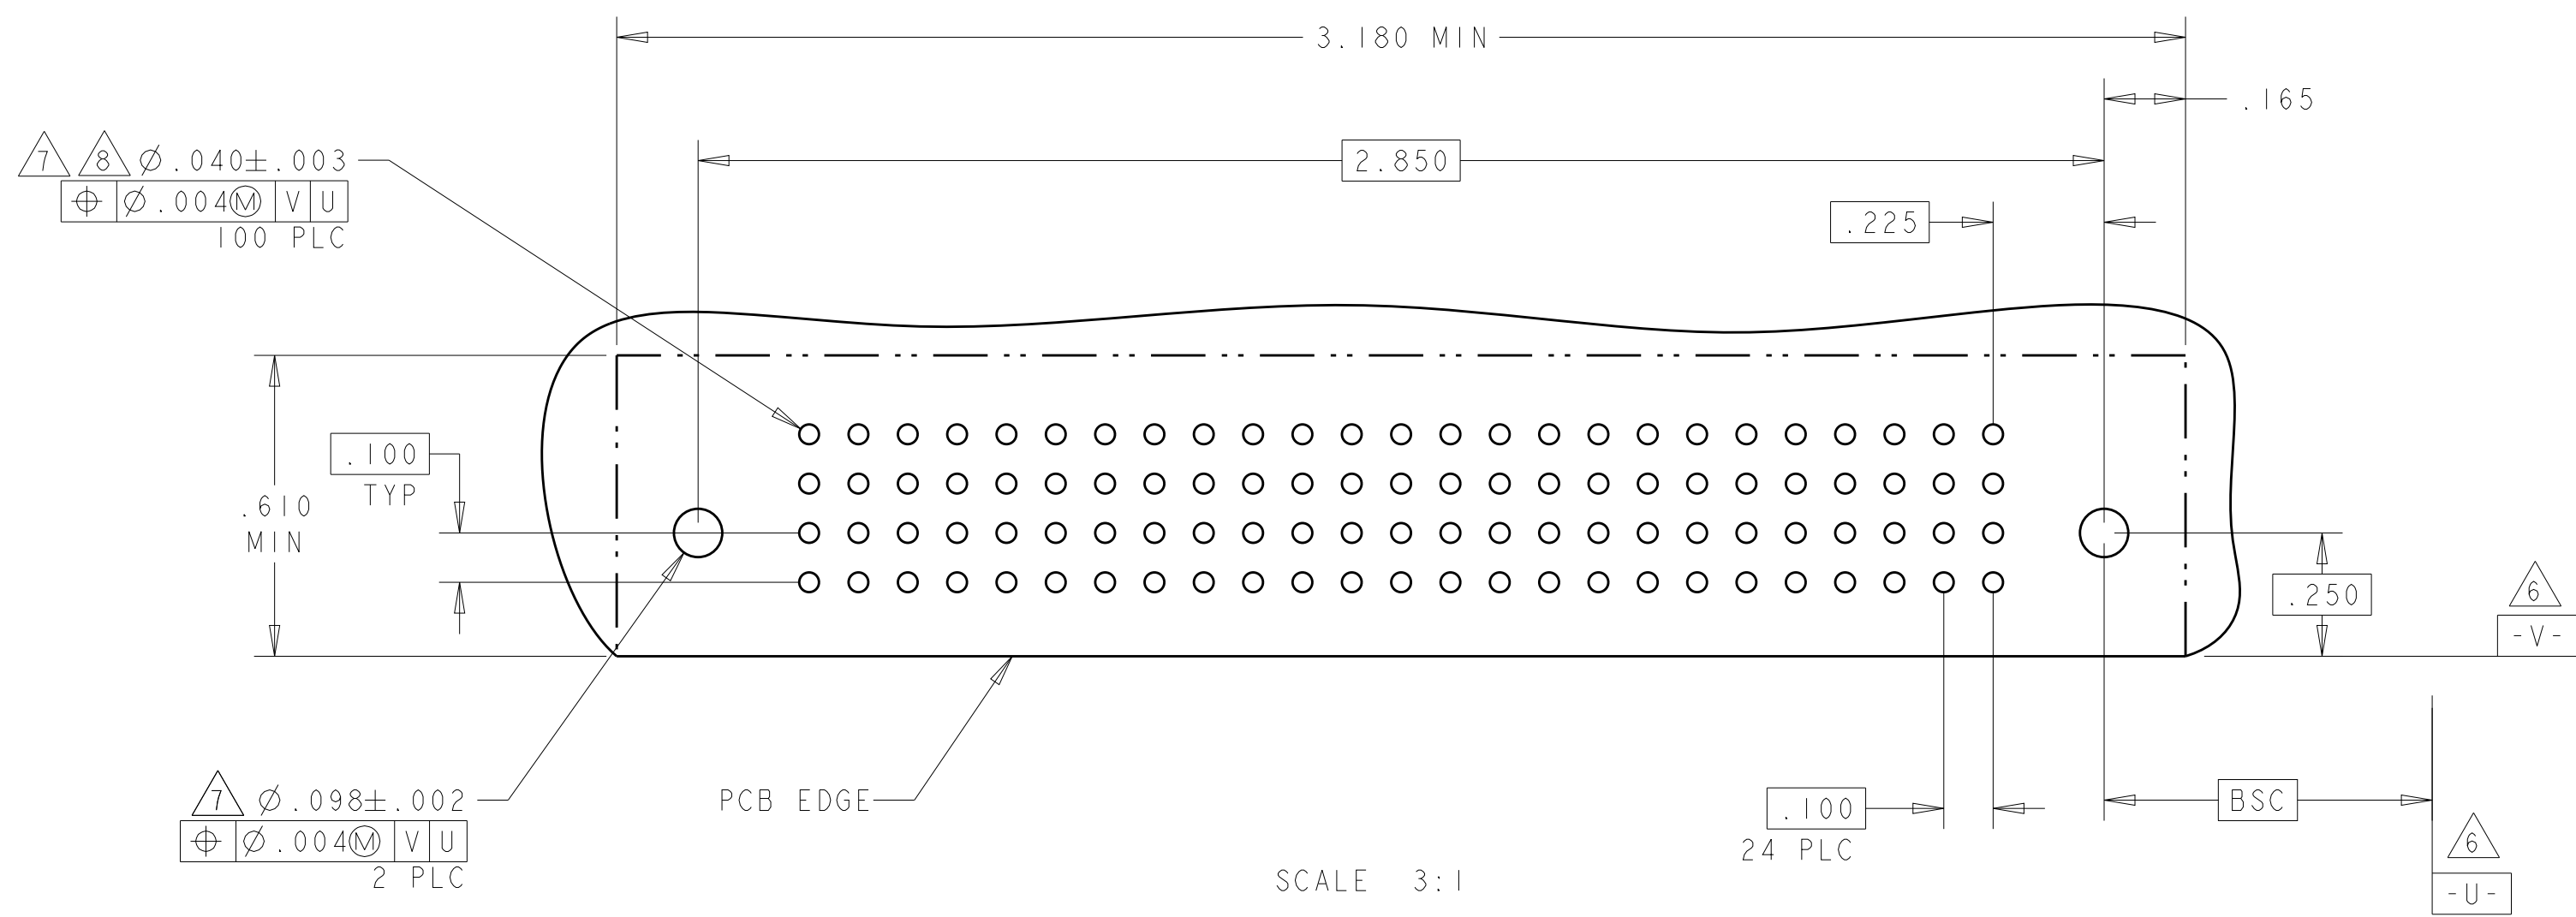[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN. GRZYBOWSKI 21FEB05 CHK. M. PERCHERKE 21FEB05 APP. M. PERCHERKE 21FEB05		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		Ø PLC ±. PLC ±. PLC ±.01 PLC ±.005 PLC ±.002 ANGLES ±°		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038	
MATERIAL		FINISH		SIZE CAGE CODE DRAWING NO A100779C6450160	RESTRICTED TO -
Customer Drawing		Customer Drawing		SCALE 3:1 SHEET 14 OF 16 REV G	



PART NUMBER	ROWS		SIGNAL																																				
			37	36	35	34	33	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6		5	4	3	2
4-6450160-6	D		H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H
	C		G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G	G
	B		F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F	F
	A	HD	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
148S																																							

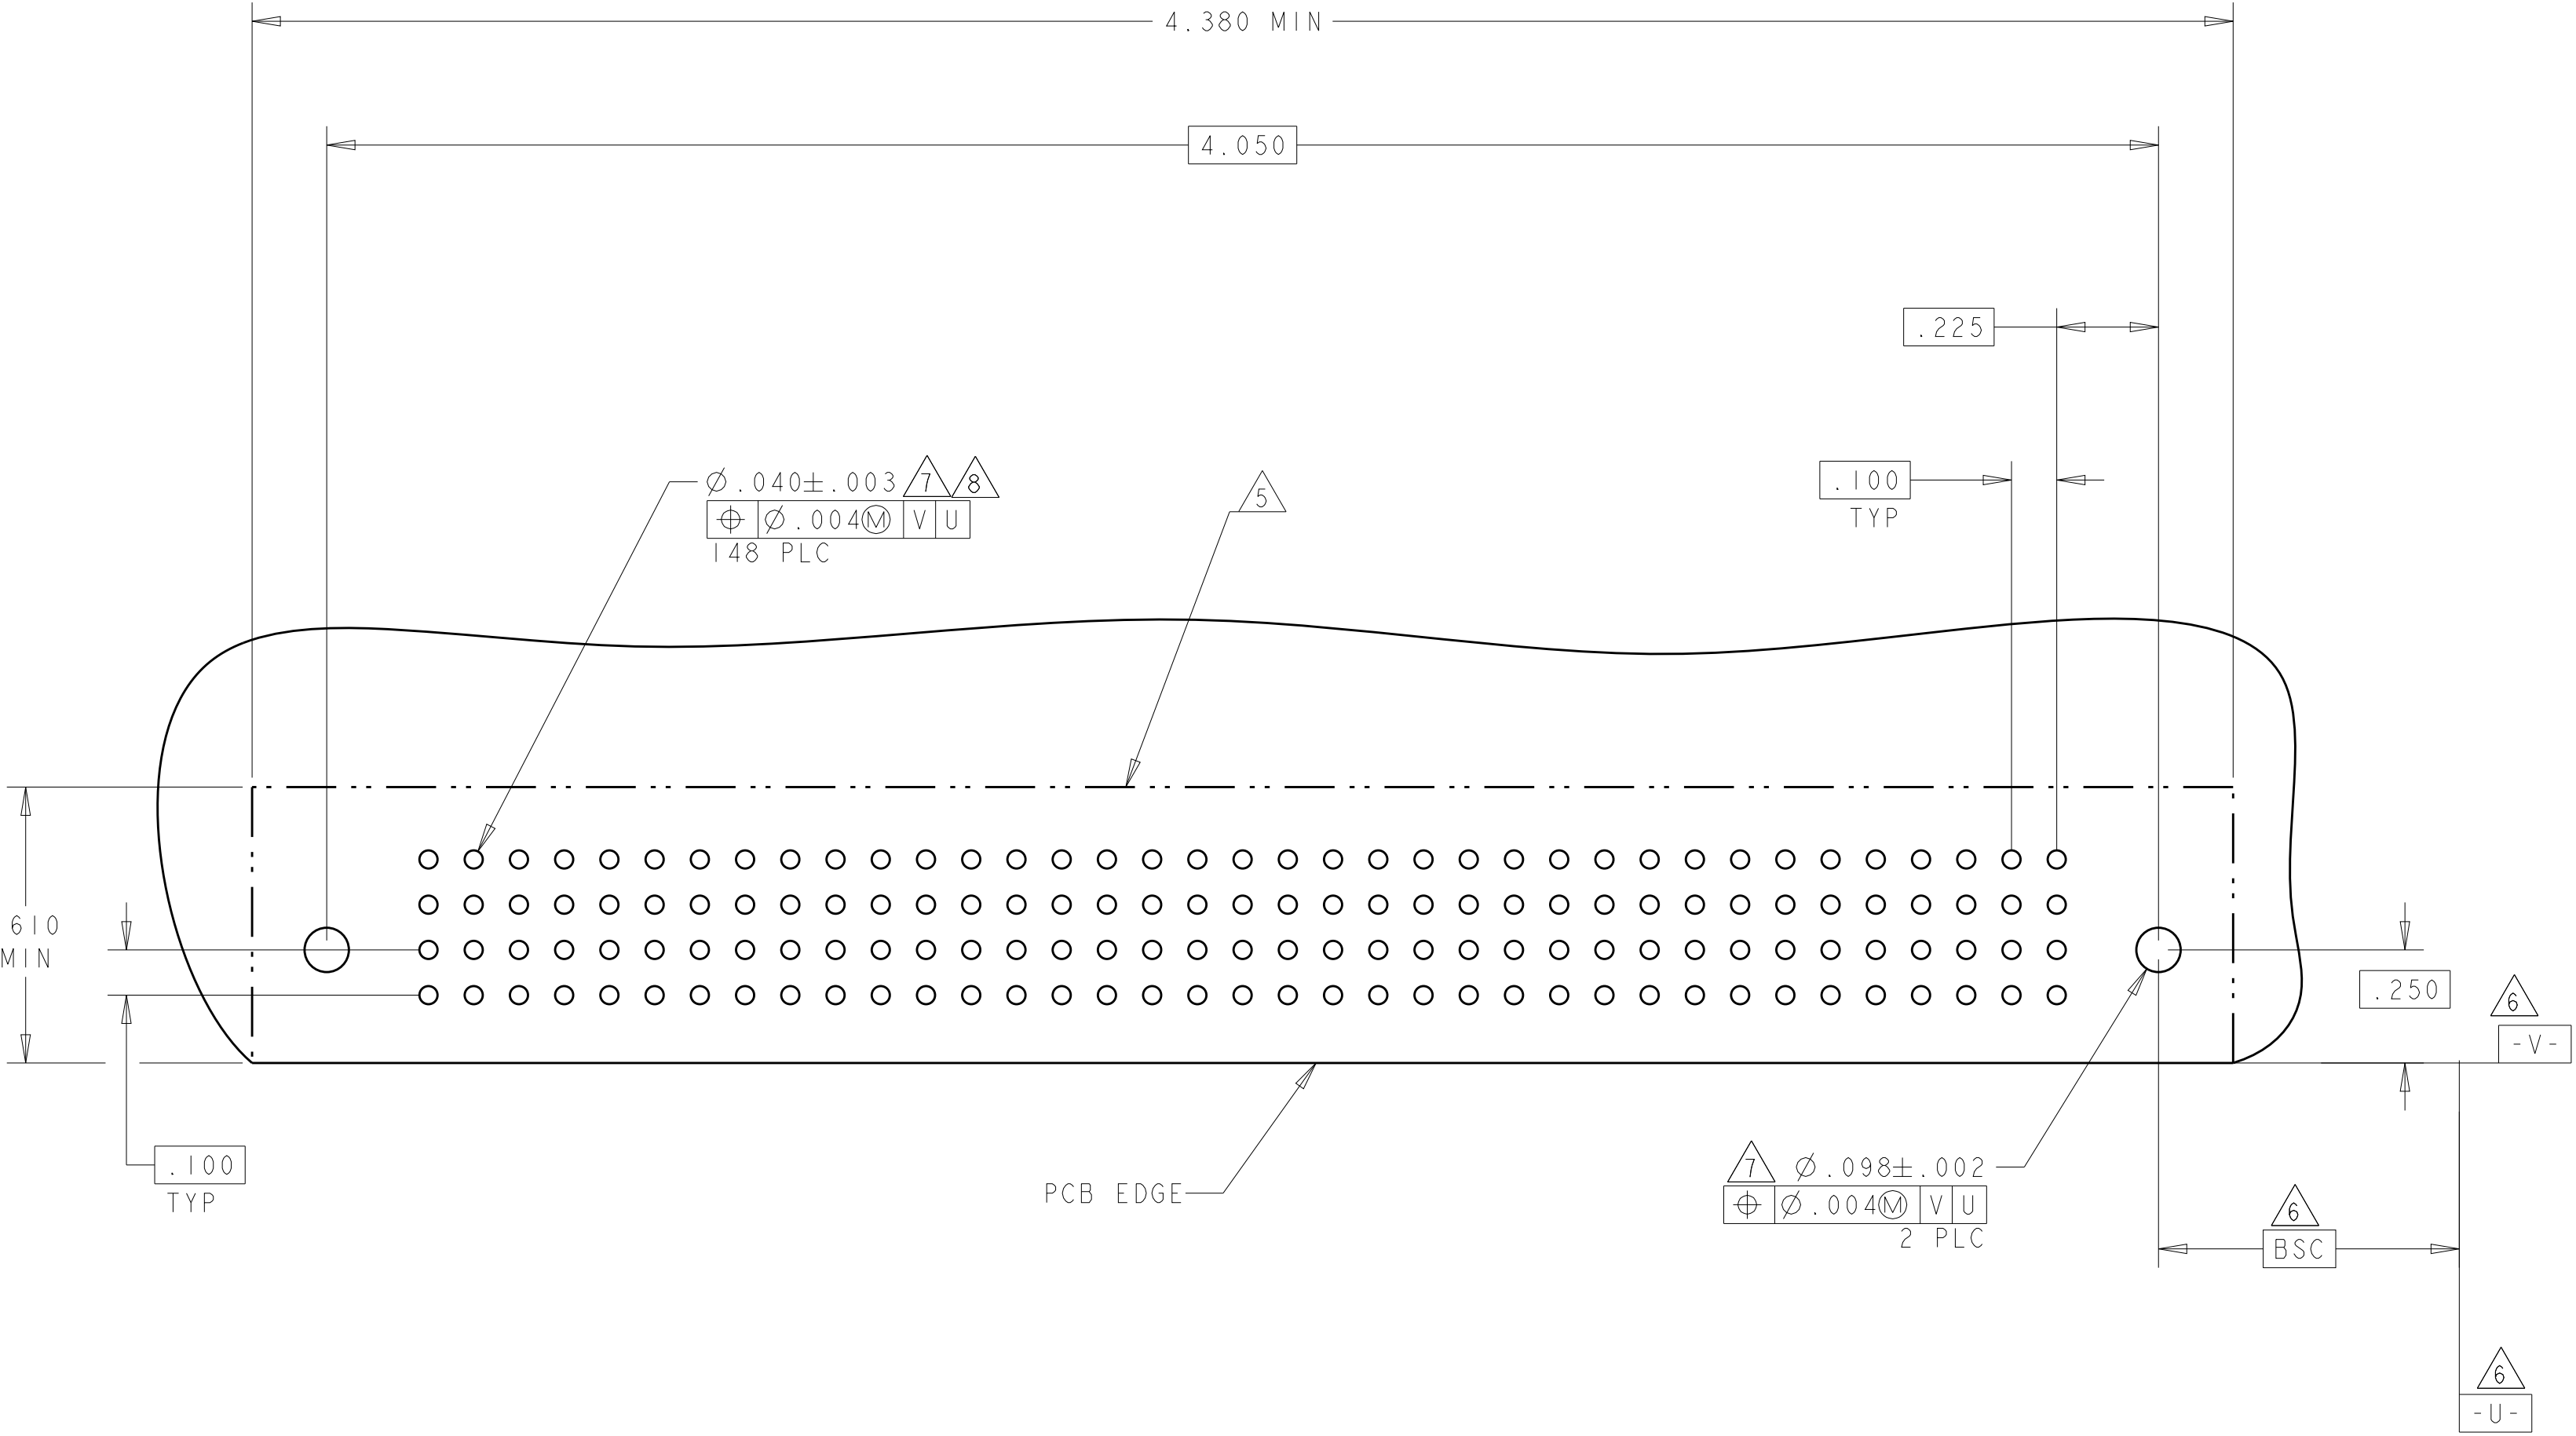4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER	SIGNAL										POWER									
			P6	11	10	9	8	7	6	5	4	3	2	1	P5	P4	P3	P2		P1			
4-6450160-8	D C B A		RM	H		H		H		H		H		H		RM			RM	RM	RM	RM	
				G		G	G																
				F		F			F			F			F	F							
				E		E	E	E	E	E	E	E	E	E	E	E							
5P + 44S + 1P																						HD	

PART NUMBER	ROWS		SIGNAL				
			4	3	2	1	
4-6450160-9	D		H	H	H	H	
	C		G	G	G	G	
	B		F	F	F	F	
	A	HD	E	E	E	E	HD
16S							

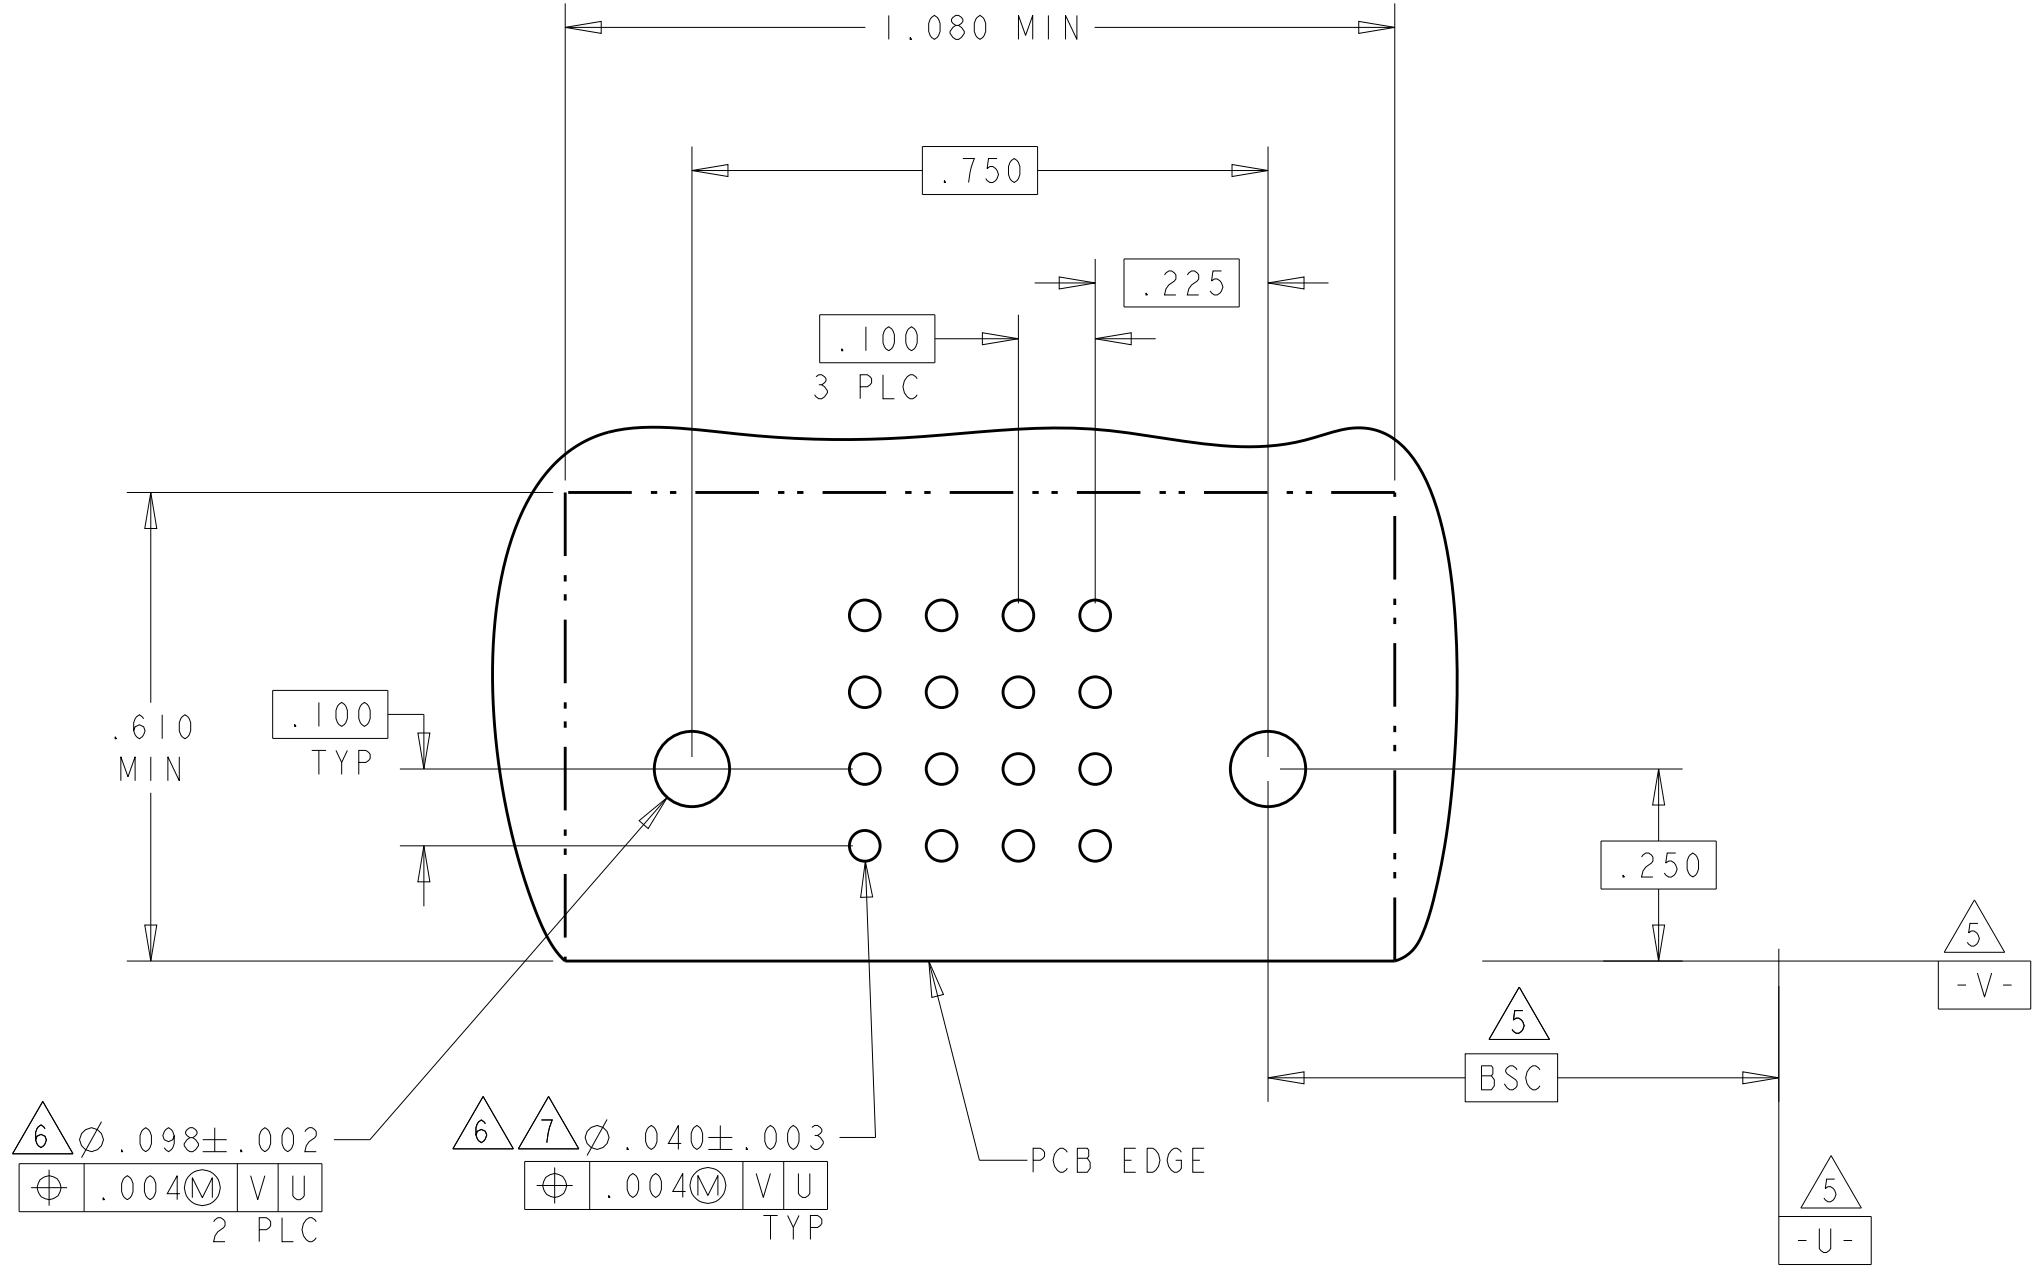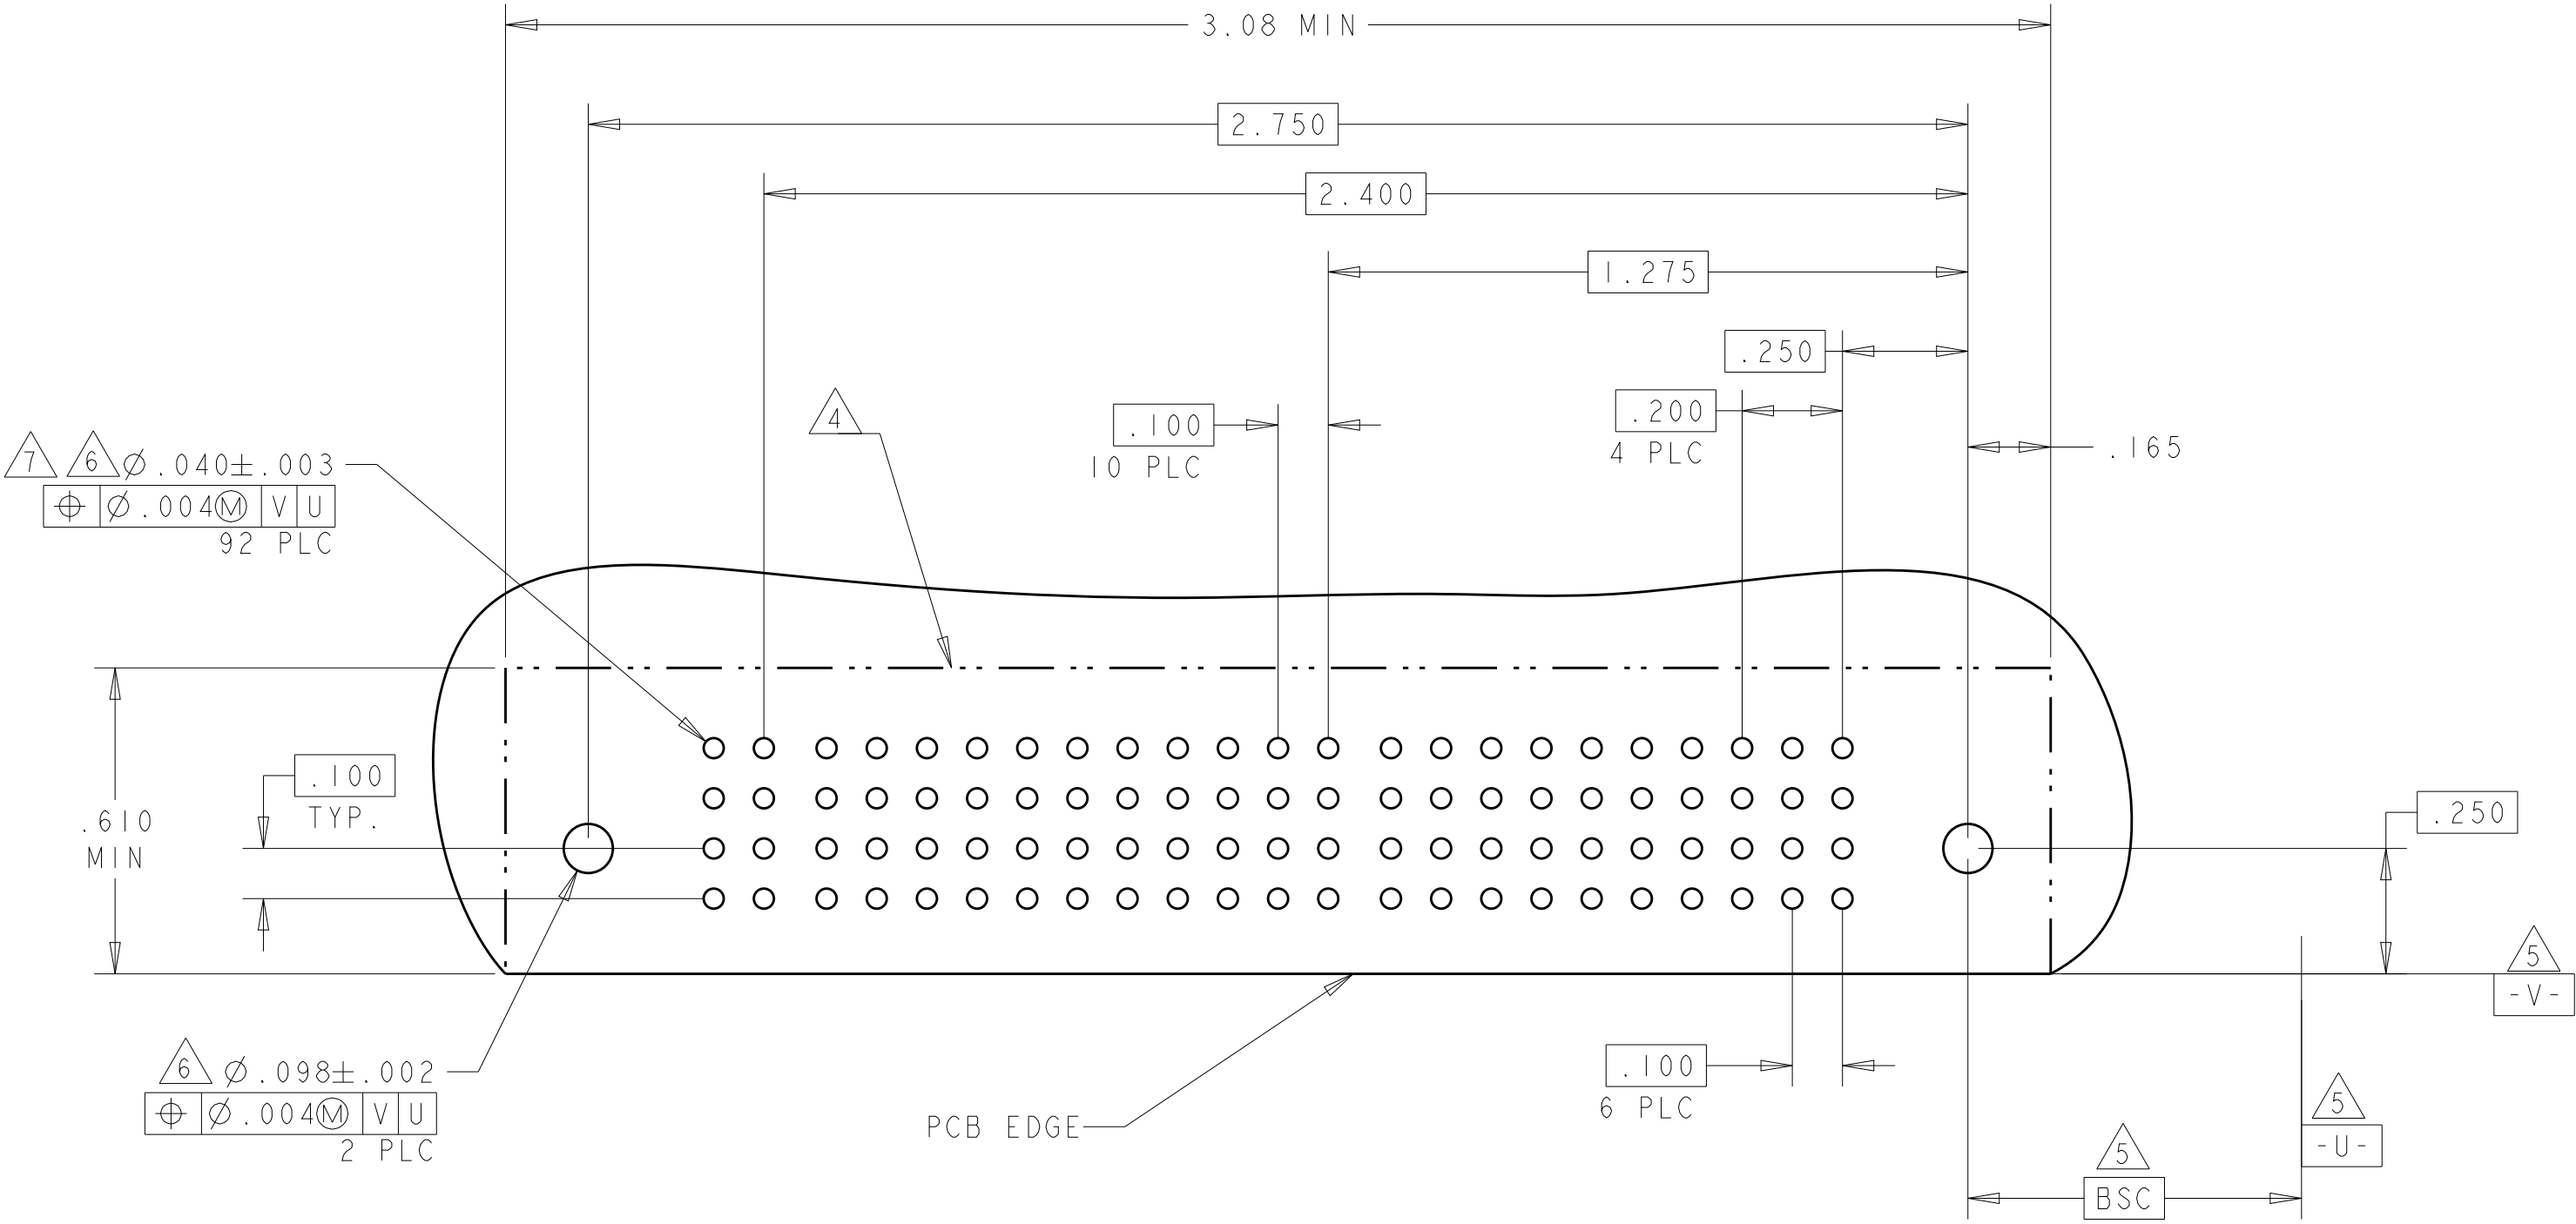

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R. GRZYBOWSKI
CHK
M. PERCHERKE
APVD
M. PERCHERKE

21FEB05
21FEB05
21FEB05

DIMENSIONS:
INCHES

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.2°
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
Customer Drawing

NAME
RIGHT ANGLE RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

SIZE
A1

CAGE CODE
00779

DRAWING NO.
C=6450160

RESTRICTED TO
-

SCALE
3:1

SHEET
16

OF
16

REV
G1

TE Connectivity

4805 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9