



PAN62311DM Black



PAN62312DM White

All dimensions are in mm / inches

### Features:

- Supports 2xMIMO Cellular LTE 698-960/1695-2170/2300-2700/2900-3600MHz
- Supports 3xMIMO WiFi and DSRC 2400-2500MHz/4900-5925MHz
- Supports Beidou, GPS, Galileo, GLONASS, Active Satellite Antenna
- Direct Mount and optional Magnetic Mount features
- See GPSMBMM for magnetic mount details

### Applications:

- Telematics
- Location based services
- First Responders(Police, Ambulance, Fire)
- Government
- Energy(Utility Vehicles)
- Fleet Management
- Railroad

Issue: 1833

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters  
15255 Innovation Drive #100  
San Diego, CA 92128  
USA  
Tel: 1-858-674-8100

Pulse/Larsen Antennas  
18110 SE 34<sup>th</sup> St Bldg 2 Suite 250  
Vancouver, WA 98683  
USA  
Tel: 1-360-944-7551

Europe Headquarters  
Pulse GmbH & Co, KG  
Zeppelinstrasse 15  
Herrenberg, Germany  
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.  
99 Huo Ju Road(#29 Bldg, 4<sup>th</sup> Phase  
Suzhou New District  
Jiangsu Province, Suzhou 215009 PR China  
Tel: 86 512 6807 9998



This document covers all product variants of the following product family

| Model NO.           | PAN62311DM                                                        | PAN62312DM                                    | PAN62311DMR                                                         | PAN62312DMR                                                         |
|---------------------|-------------------------------------------------------------------|-----------------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------|
| Color               | Black                                                             | White                                         | Black                                                               | White                                                               |
| Cable NO.           | 6                                                                 | 6                                             | 6                                                                   | 6                                                                   |
| Operating Bands     | 2-LTE+<br>3WiFi+<br>1-GPS/GNSS                                    | 2-LTE+<br>3WiFi+<br>1-GPS/GNSS                | 2-LTE+<br>3WiFi+<br>1-GPS/GNSS                                      | 2-LTE+<br>3WiFi+<br>1-GPS/GNSS                                      |
| LET/WiFi Cable Type | RG58(Black)                                                       | RG58(White)                                   | RG58HT(Black)                                                       | RG58HT(White)                                                       |
| GPS Cable Type      | RG174(Black)                                                      | RG174(White)                                  | RG174HT(Black)                                                      | RG174HT(White)                                                      |
| Cable length        | 17FT                                                              | 17FT                                          | 17FT                                                                | 17FT                                                                |
| Connector           | LTE: SMA(M)<br>WiFi: RP-SMA(M)<br>GPS: SMA(M)                     | LTE: SMA(M)<br>WiFi: RP-SMA(M)<br>GPS: SMA(M) | LTE: SMA(M)<br>WiFi: RP-SMA(M)<br>GPS: SMA(M)                       | LTE: SMA(M)<br>WiFi: RP-SMA(M)<br>GPS: SMA(M)                       |
| Assembly option     | 1.Assembly directly with nut<br>2.Magnetic mount base P/N:GPSMBMM |                                               |                                                                     |                                                                     |
| Remark              |                                                                   |                                               | Compliant with EN 50155, EN 61373, EN45545-2, Railroad application. | Compliant with EN 50155, EN 61373, EN45545-2, Railroad application. |

Issue: 1833

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters  
15255 Innovation Drive #100  
San Diego, CA 92128  
USA  
Tel:1-858-674-8100

Pulse/Larsen Antennas  
18110 SE 34<sup>th</sup> St Bldg 2 Suite 250  
Vancouver, WA 98683  
USA  
Tel: 1-360-944-7551

Europe Headquarters  
Pulse GmbH & Do, KG  
Zeppelinstrasse 15  
Herrenberg, Germany  
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.  
99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase  
Suzhou New District  
Jiangsu Province, Suzhou 215009 PR China  
Tel: 86 512 6807 9998



|                                  |                                                        |                 |
|----------------------------------|--------------------------------------------------------|-----------------|
| Frequency (2XLTE)                | 698 - 960 / 1695 – 2170 /<br>2300 - 2700 / 2900 – 3600 | MHz             |
| Frequency (3XWiFi&DSRC)          | 2400 – 2500/<br>4900 – 5925                            | MHz             |
| Frequency (1XGNSS)               | 1561.098±2.046/<br>1575.42±1.023/<br>1602.5625±4       | MHz             |
| Nominal Impedance                | 50                                                     | $\Omega$        |
| VSWR** (LTE)                     | < 1.5                                                  |                 |
| VSWR** (WiFi&DSRC)               | < 1.4                                                  |                 |
| Gain* (LTE antenna, < 2170 MHz)  | 4                                                      | dBi ± 2.5 dB    |
| Gain* (LTE antenna, > 2170 MHz)  | 5                                                      | dBi ± 2 dB      |
| Gain* (WiFi antenna, < 2500 MHz) | 4.5                                                    | dBi ± 1.5 dB    |
| Gain* (WiFi antenna, > 4900 MHz) | 5                                                      | dBi ± 2 dB      |
| Isolation LTE to LTE **          | 15 or better                                           | dB              |
| Isolation WiFi to WiFi **        | 25 or better                                           | dB              |
| GNSS antenna RHCP gain           | 1                                                      | dBic ± 2 dB     |
| LNA gain                         | 30                                                     | dB ± 2 dB       |
| Noise Figure                     | 2.5 (cascade)                                          | dB              |
| Current                          | 9                                                      | mA ± 2 mA       |
| V <sub>dc</sub>                  | 3-5                                                    | V <sub>dc</sub> |
| LNA and filter attenuation       |                                                        |                 |
|                                  | @ 824 MHz                                              | 70 dB           |
|                                  | @ 960 MHz                                              | 65 dB           |
|                                  | @ 1710 MHz                                             | 60 dB           |
|                                  | @ 2170 MHz                                             | 65 dB           |

\*Measured on 2ft GND plane and with 4 inch cables

\*\*In free space with 17ft cables

Series: Panther

## TECHNICAL DATA SHEET

Description: 2xMiMo LTE, 3xMiMo WiFi,  
GNSS Vehicle Mount Antenna

PART NUMBER: PAN62311DM, PAN62312DM,  
PAN62311DMR, PAN62312DMR

### MECHANICAL SPECIFICATIONS

|                                          |                                                                                                                                    |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Plastic radome for PAN62311DM/PAN62312DM | ABS/PC Material UV<br>Stabilized, UL-94HB                                                                                          |
| for PAN62311DMR/PAN62312DMR              | PC material, EN45545<br>R6 HL3 compliant                                                                                           |
| Color                                    | Black, White                                                                                                                       |
| Ingress Protection                       | IP67                                                                                                                               |
| Weight                                   | ~1540 g                                                                                                                            |
| Fixing system                            | Roof mounting (Also<br>Magnet mounting<br>accessory available,<br>GPSMBMM)<br>Recommended fastening<br>torque 1518ft-lb (20-25Nm). |

### ENVIRONMENTAL SPECIFICATIONS

|                       |                                                     |
|-----------------------|-----------------------------------------------------|
| Operating temperature | MIL-STD 810G -40/+85° C                             |
| Humidity              | 95%RH @ +25°C for 12h and 55°C for 12h              |
| Vibration             | MIL-STD 810G, section 514.6 , 5-500 Hz, 60min/axis  |
| Thermal Shocks        | MIL-STD 810G, section 503.5, -40 to +85°C, 3 cycles |
| Drop Test             | Minimum of one drop per axis – 4, 1 meter drops     |

Issue: 1833

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Series: Panther

## TECHNICAL DATA SHEET

Description: 2xMiMo LTE, 3xMiMo WiFi,  
GNSS Vehicle Mount Antenna

PART NUMBER: PAN62311DM, PAN62312DM,  
PAN62311DMR,PAN62312DMR

### Tests for railroad certification per EN50155, EN61373, EN45545-2

| NO | T SN IN STAND | TEST DESCRIPTION                                                         | REFER STANDARD     | TEST REPORT NO  | RESULT(PASS/FAIL) |
|----|---------------|--------------------------------------------------------------------------|--------------------|-----------------|-------------------|
| 1  | 12.2.3        | Cooling test                                                             | EN 50155           | DD20170919002   | PASS              |
| 2  | 12.2.4        | Dry heat test                                                            |                    |                 |                   |
| 3  | 12.2.5        | Damp heat test, cyclic                                                   |                    |                 |                   |
| 4  | 12.2.6        | Supply overvoltages                                                      | EN 50155           | W01714200900E   | PASS              |
| 5  | 12.2.7        | Surges, electrostatic discharge and transient burst susceptibility tests | EN 50155           | E1710056-01E    | PASS              |
| 6  | 12.2.8        | Radio interference                                                       |                    |                 |                   |
| 7  | 12.2.9        | Insulation test                                                          | EN 50155           | E17110014-01E   | PASS              |
| 8  | 12.2.10       | Salt mist test                                                           | EN 50155           | DD20170919002   | PASS              |
| 9  | 12.2.11       | Vibration                                                                | EN 61373           |                 |                   |
|    |               | Shock, and bump test                                                     | EN 61373           |                 |                   |
| 10 | 12.2.12       | Watertightness test                                                      | EN 50155           |                 |                   |
| 11 | 12.2.14       | Low temperature storage test                                             | EN 50155           | TC 18 02 000528 | HL1&HL2           |
| 12 | /             | fire & smoke                                                             | EN 45545-2 R15&R16 |                 |                   |
|    |               |                                                                          | EN 45545-2 R15&R16 | TC.18.04.001633 | HL1&HL2&HL3       |

Issue: 1833

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.



Series: Panther

## TECHNICAL DATA SHEET

Description: 2xMiMo LTE, 3xMiMo WiFi,  
GNSS Vehicle Mount Antenna

PART NUMBER: PAN62311DM, PAN62312DM,  
PAN62311DMR, PAN62312DMR

### MECHANICAL DRAWING

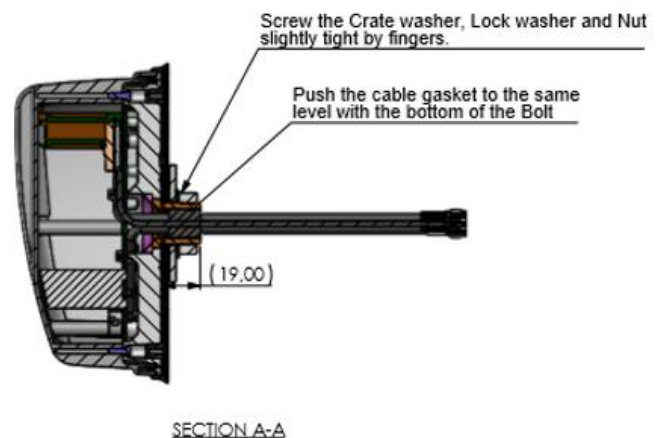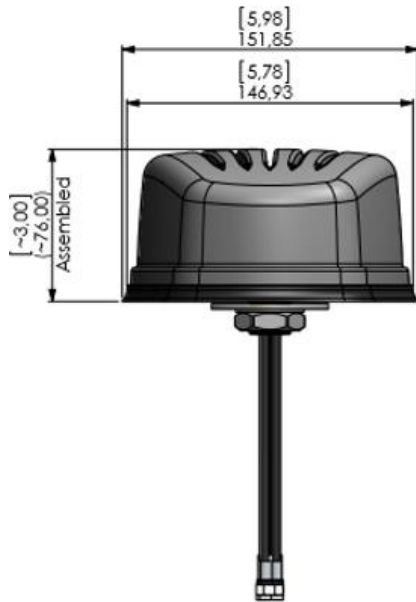


Issue: 1833

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

## TEST SETUP

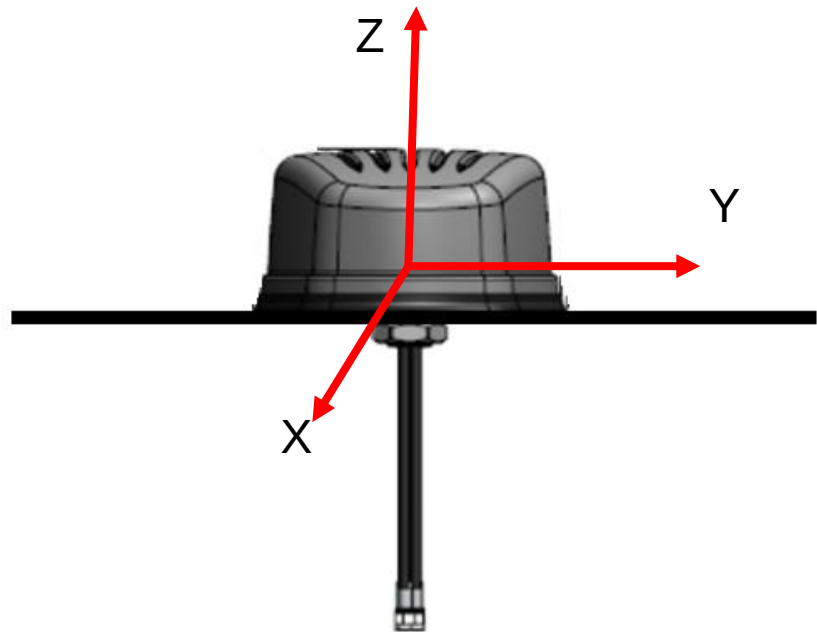


For VSWR, test in free space with 17ft cables


For radiation performance, test on 2ft GND plane with 4inch cables

## CHARTS

### VSWR of LTE antenna

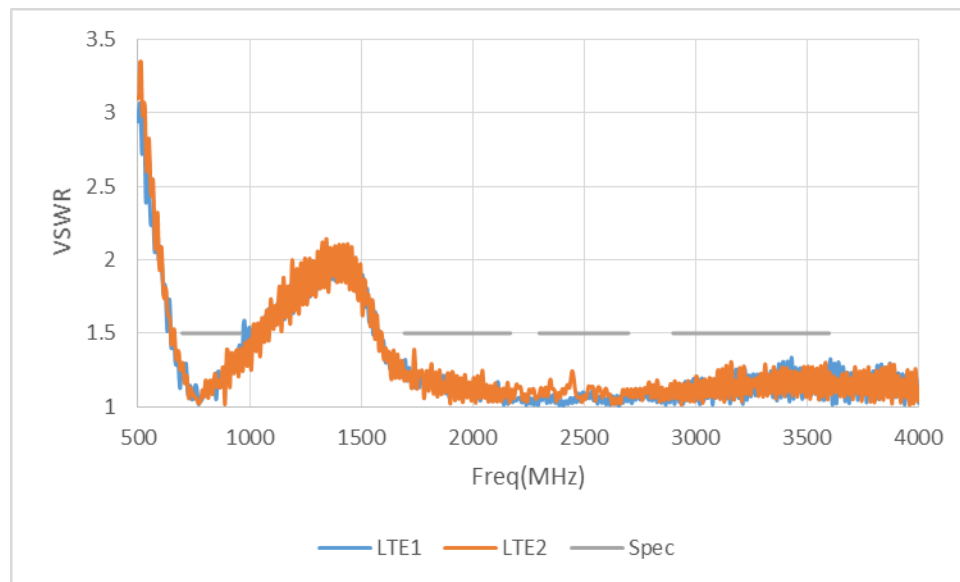

### VSWR of WiFi antenna

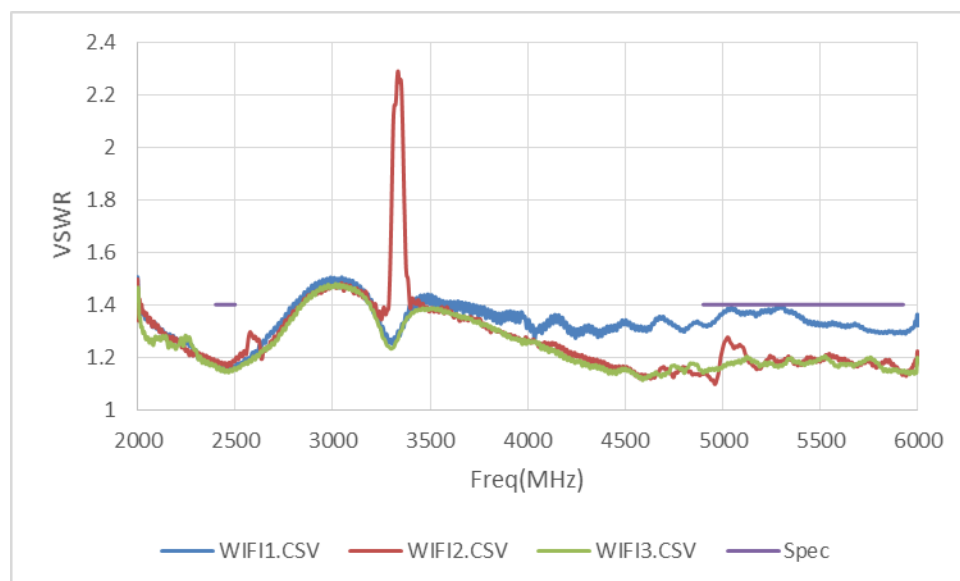

Issue: 1833


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION


This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

## CHARTS

### Isolation of LTE antenna

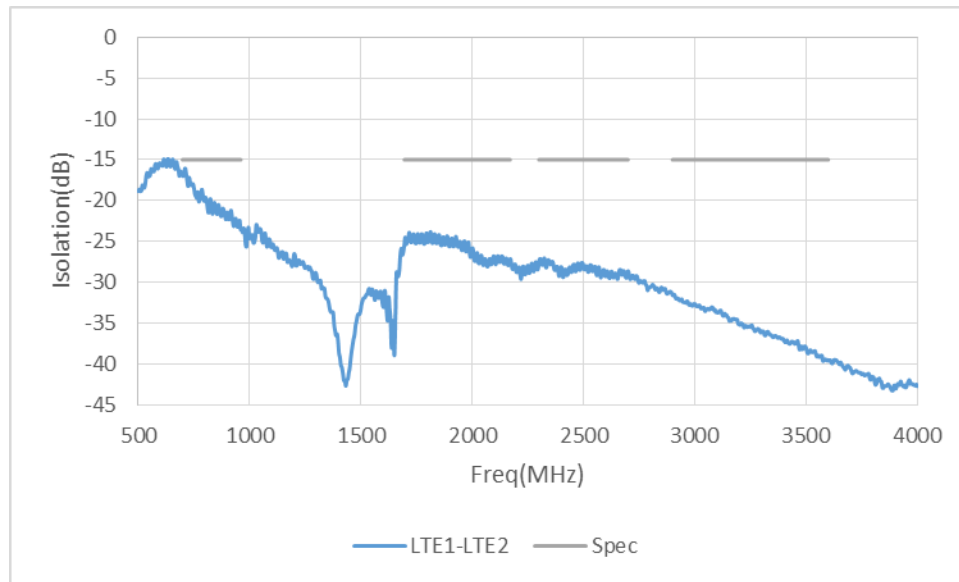


### Isolation of WiFi antenna

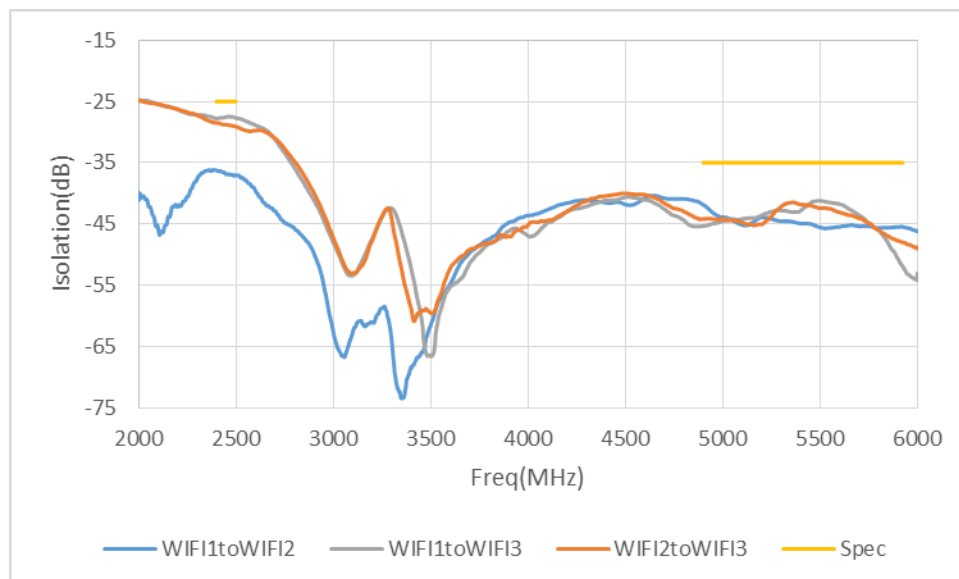


## CHARTS

### Isolation of LTE1 antenna to WiFi antenna

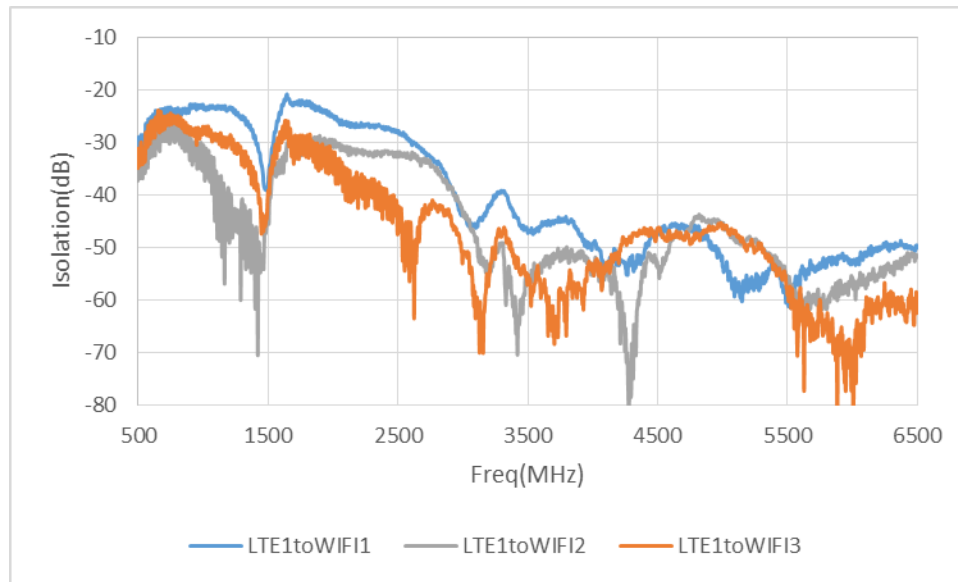


### Isolation of LTE2 antenna to WiFi antenna

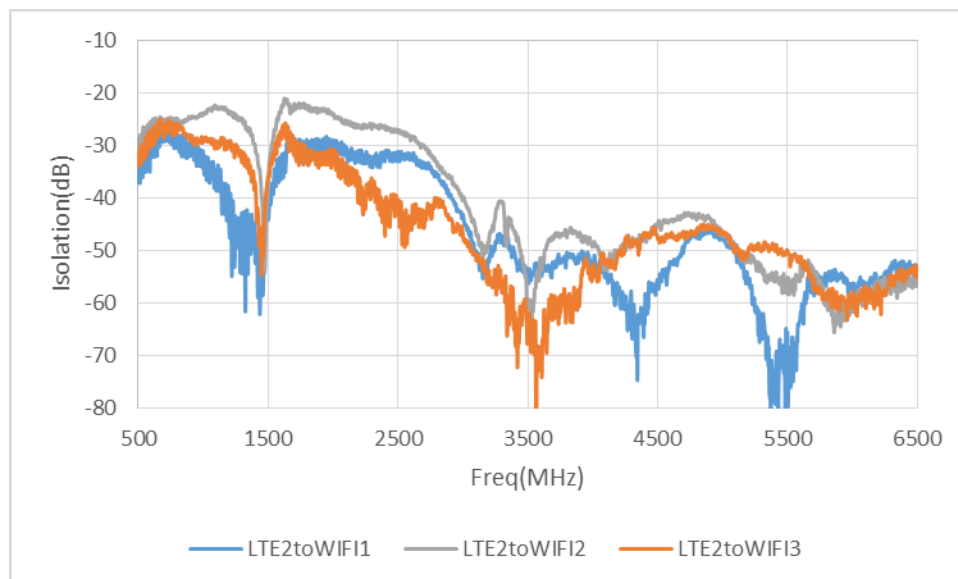


## CHARTS

### Isolation of GNSS antenna to LTE antenna

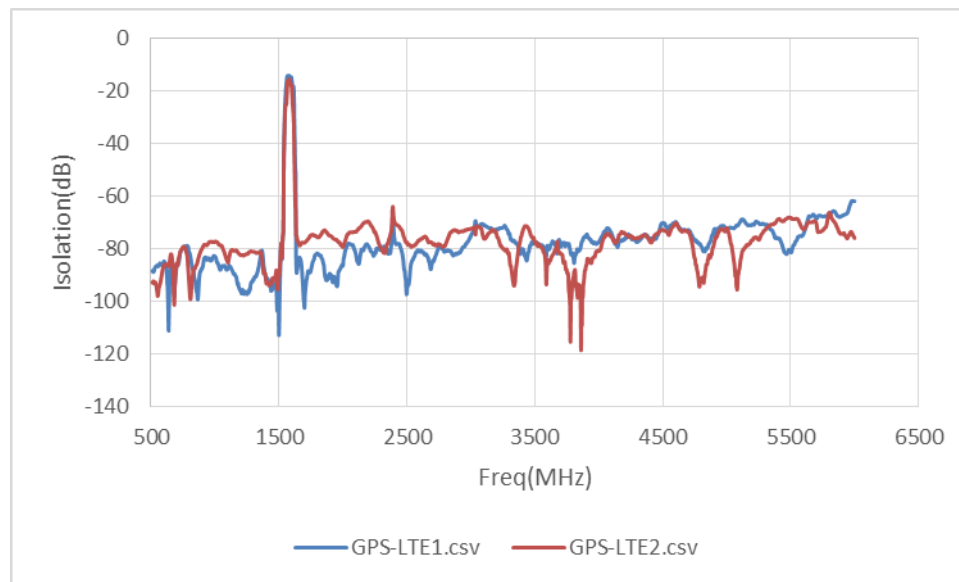


### Isolation of GNSS antenna to WiFi antenna

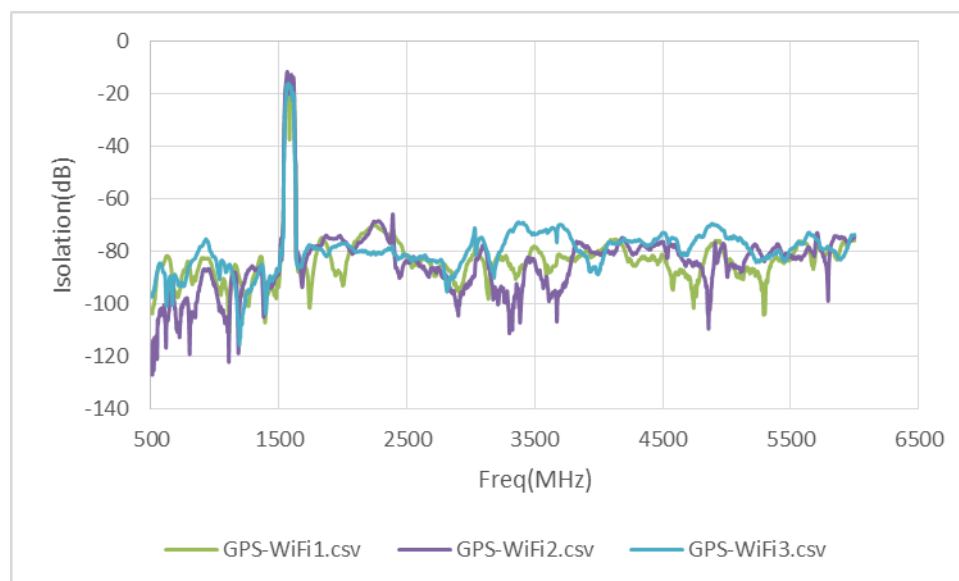


## CHARTS

### GNSS LNA performance

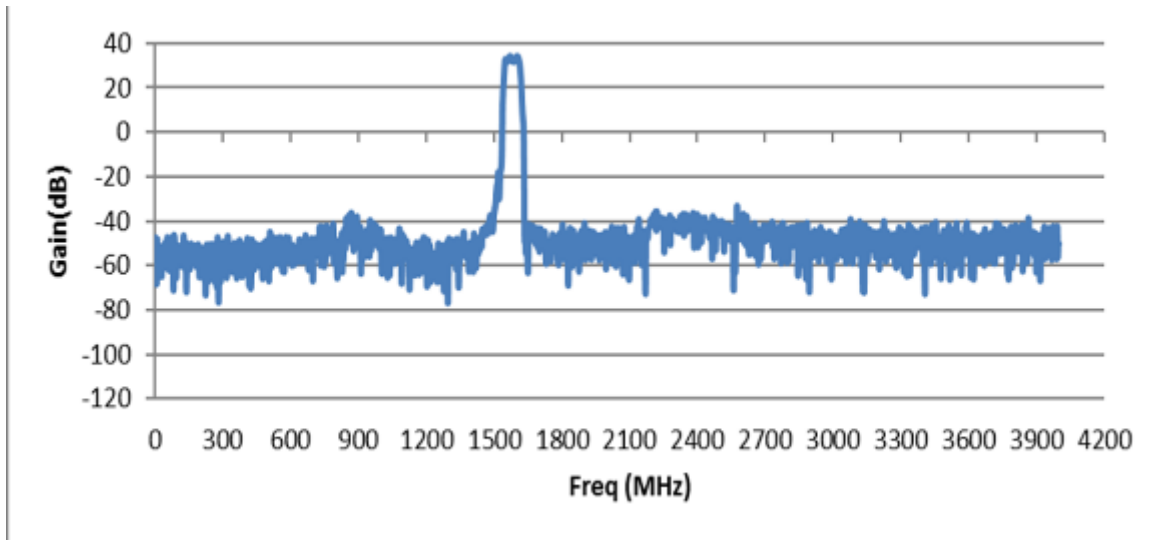


## CHARTS

### LTE antenna total efficiency on ground plane\*\*

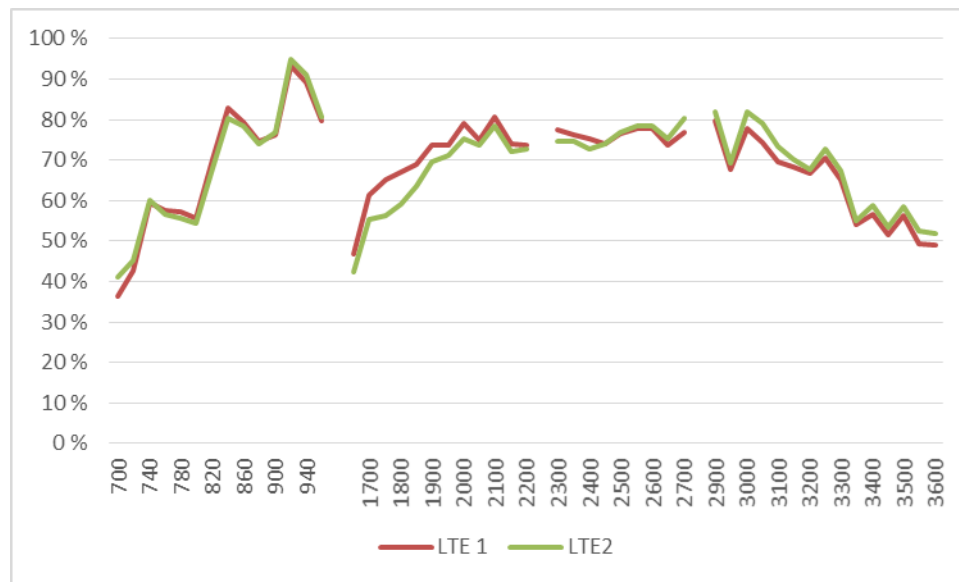


### Maximum 3D gain, LTE antenna on ground plane\*\*

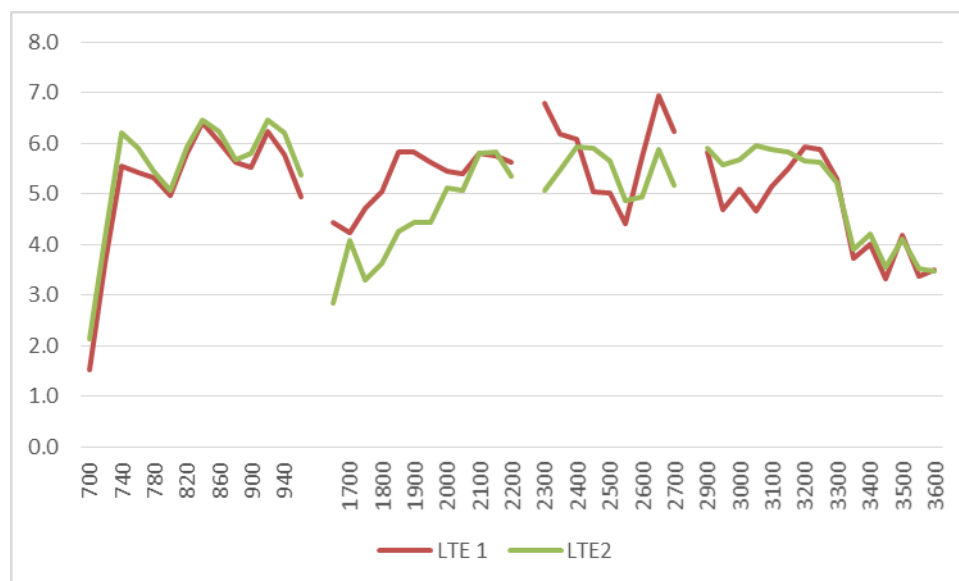


## CHARTS

### WiFi antenna total efficiency on ground plane\*\*

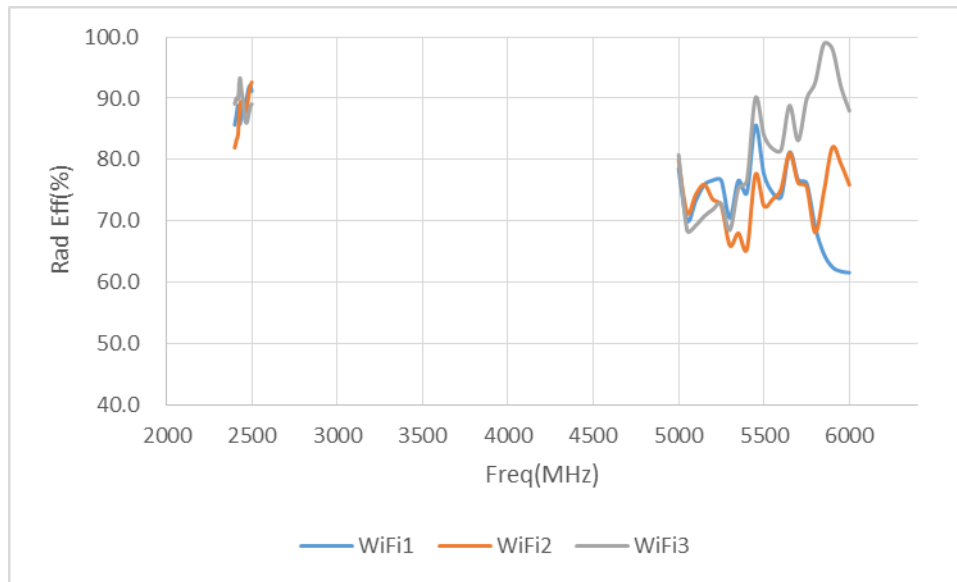


### Maximum 3D gain, WiFi antenna on ground plane\*\*

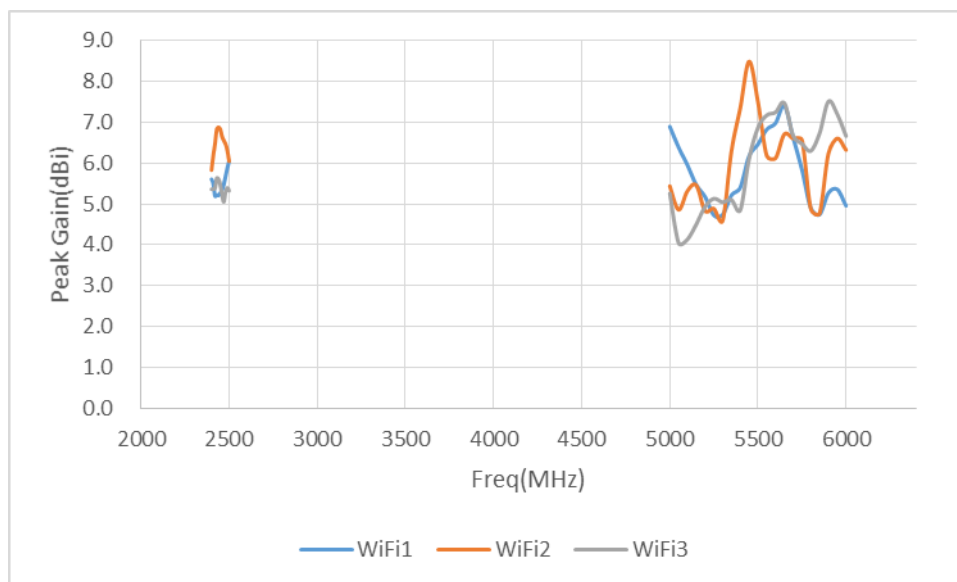


## CHARTS

### LTE1 antenna X-Y plane radiation pattern at LTE low band\*\*

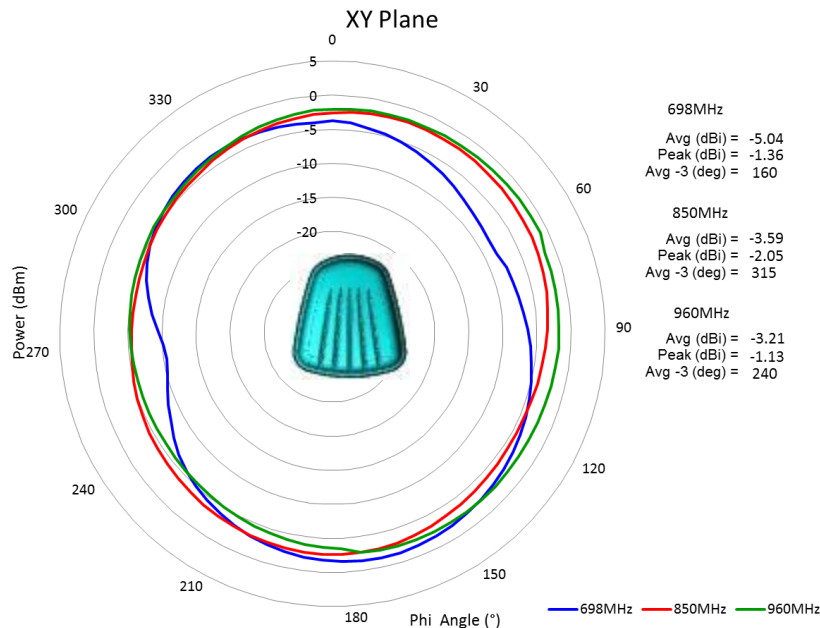


### LTE1 antenna Z-X plane radiation pattern at LTE low band\*\*

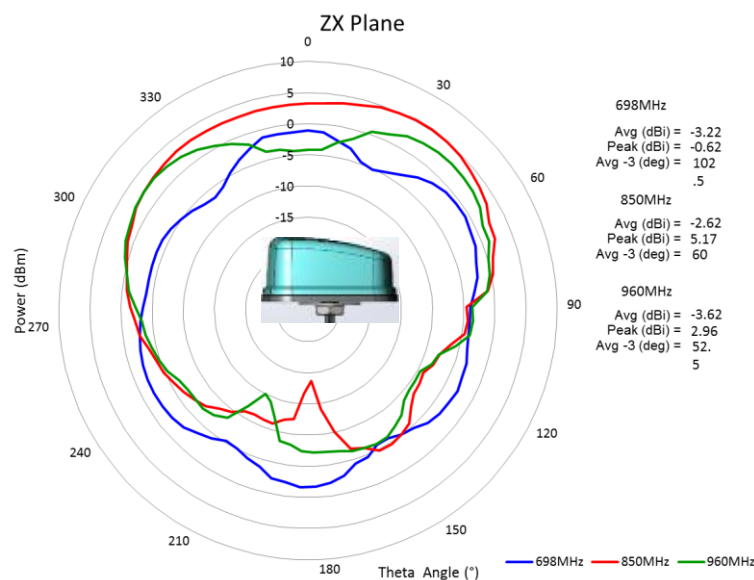


## CHARTS

### LTE1 antenna Y-Z plane radiation pattern at LTE low band\*\*

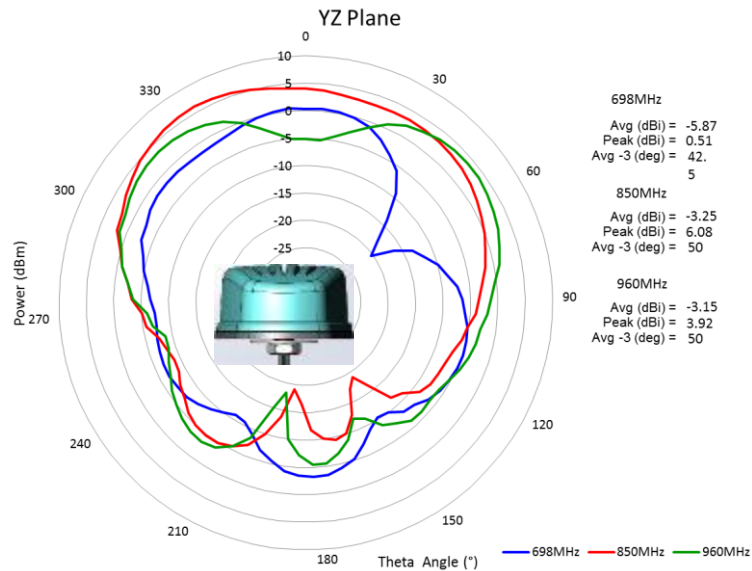


## CHARTS

### LTE1 antenna X-Y plane radiation pattern at LTE high band\*\*

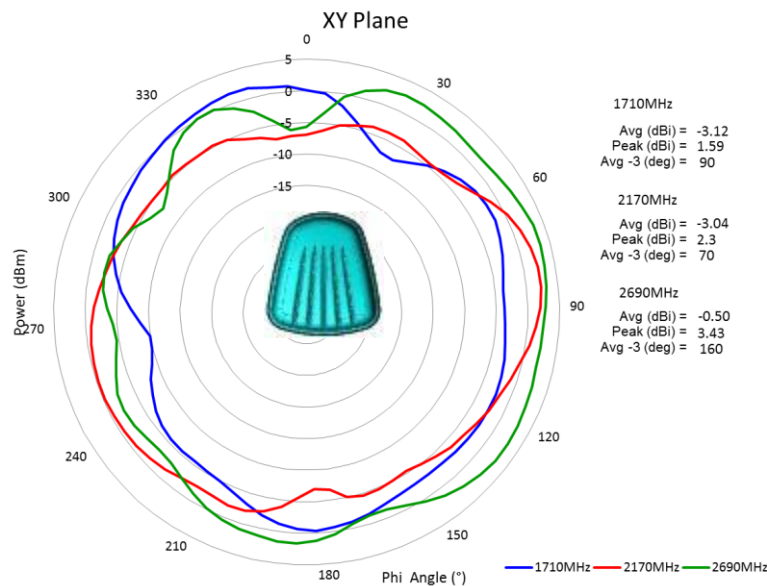


### LTE1 antenna Z-X plane radiation pattern at LTE high band\*\*

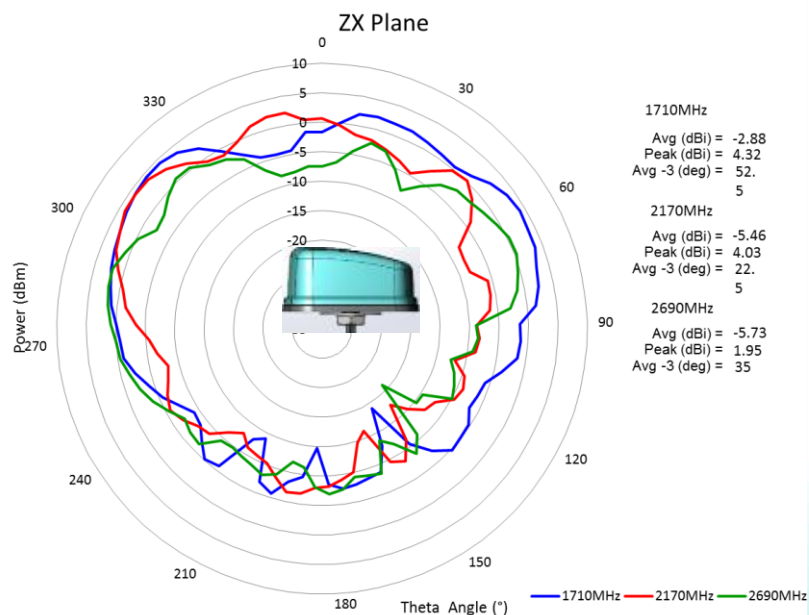


## CHARTS

### LTE1 antenna Y-Z plane radiation pattern at LTE high band\*\*

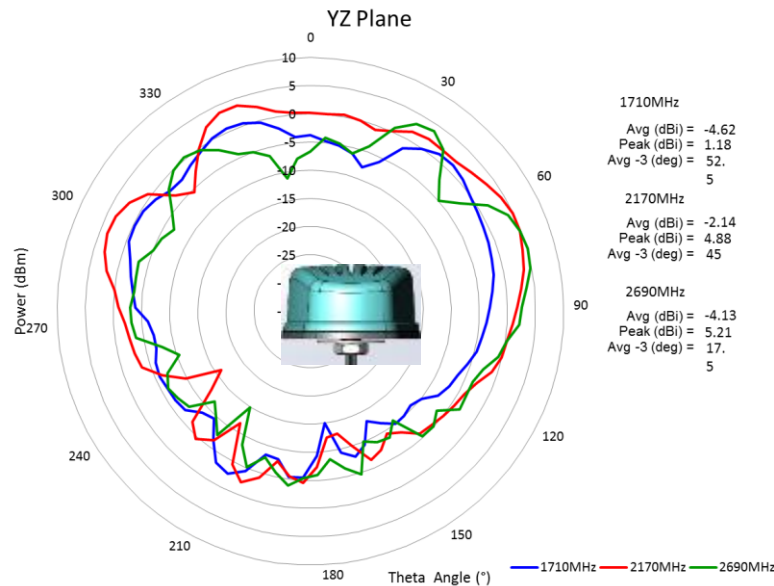


## CHARTS

### LTE2 antenna X-Y plane radiation pattern at LTE low band\*\*

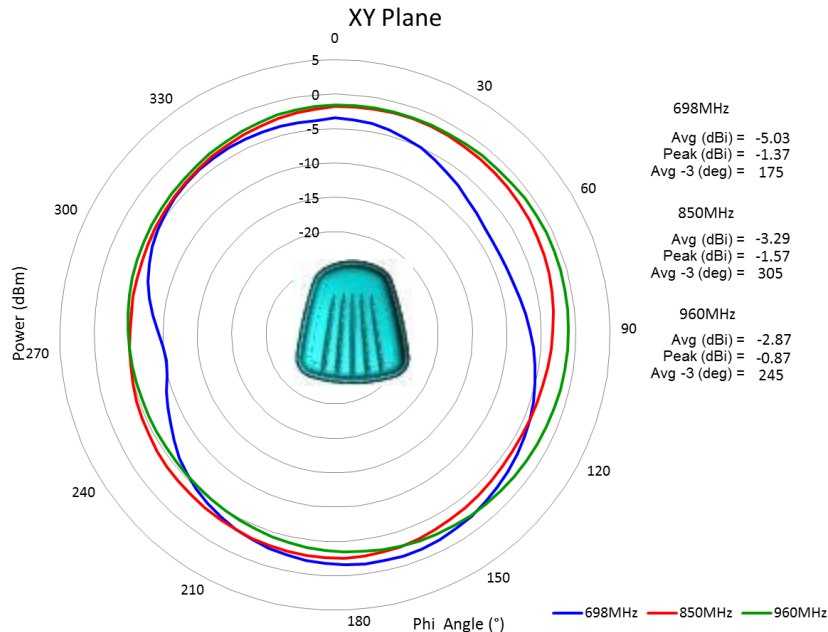

### LTE2 antenna Z-X plane radiation pattern at LTE low band\*\*

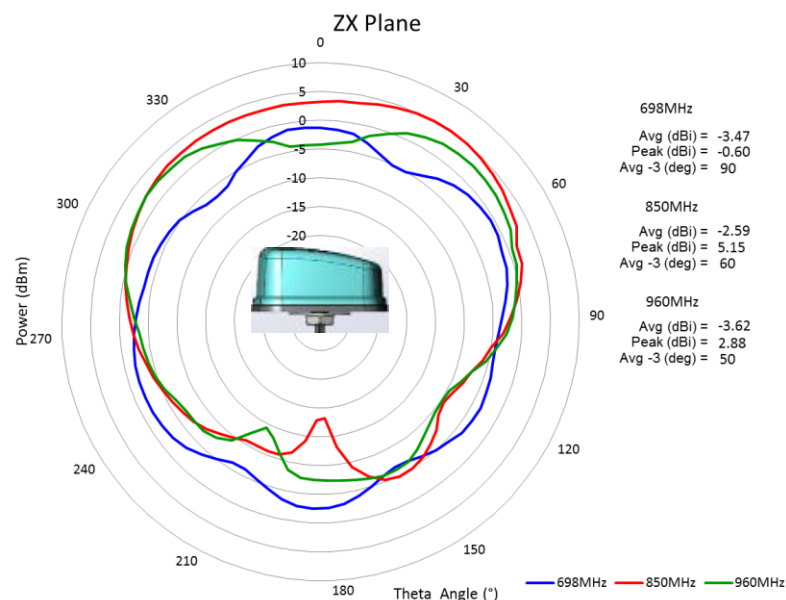

Issue: 1833


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


## CHARTS

### LTE2 antenna Y-Z plane radiation pattern at LTE low band\*\*

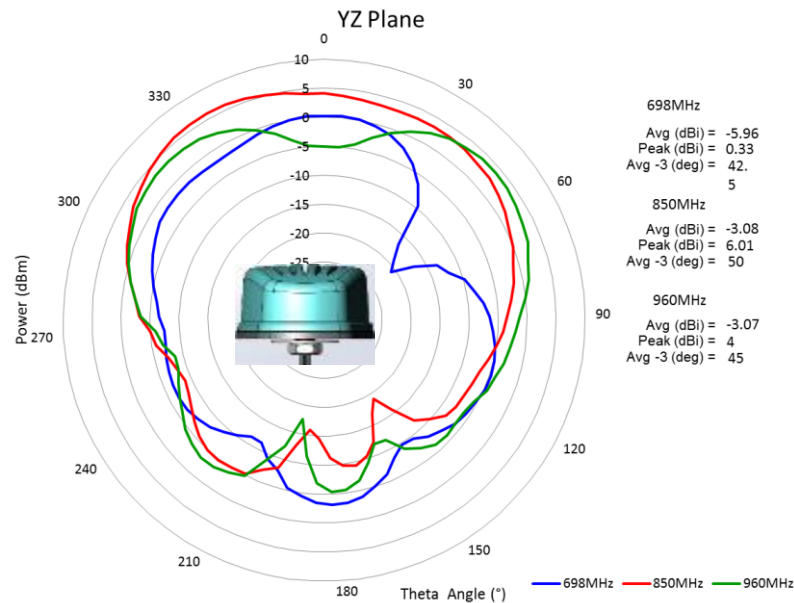


## CHARTS

### LTE2 antenna X-Y plane radiation pattern at LTE high band\*\*

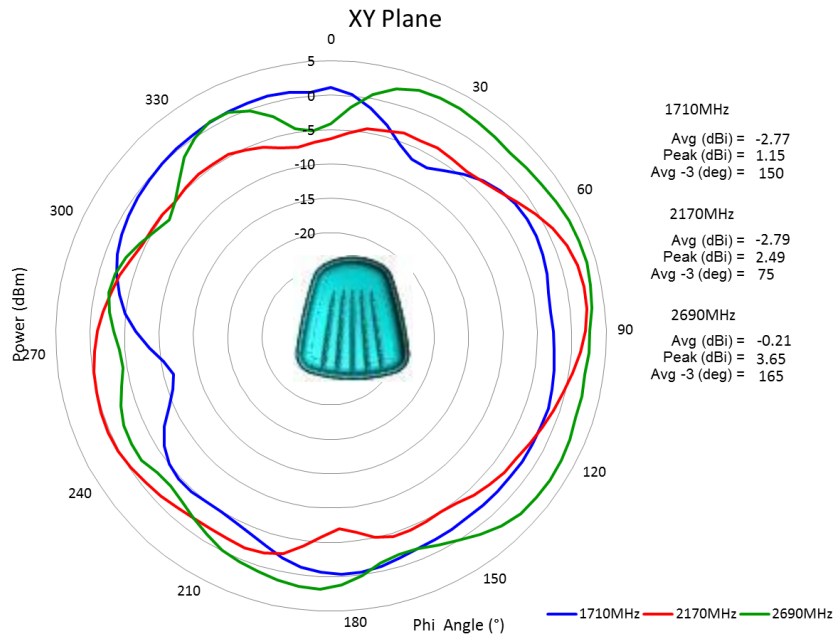


### LTE2 antenna Z-X plane radiation pattern at LTE high band\*\*

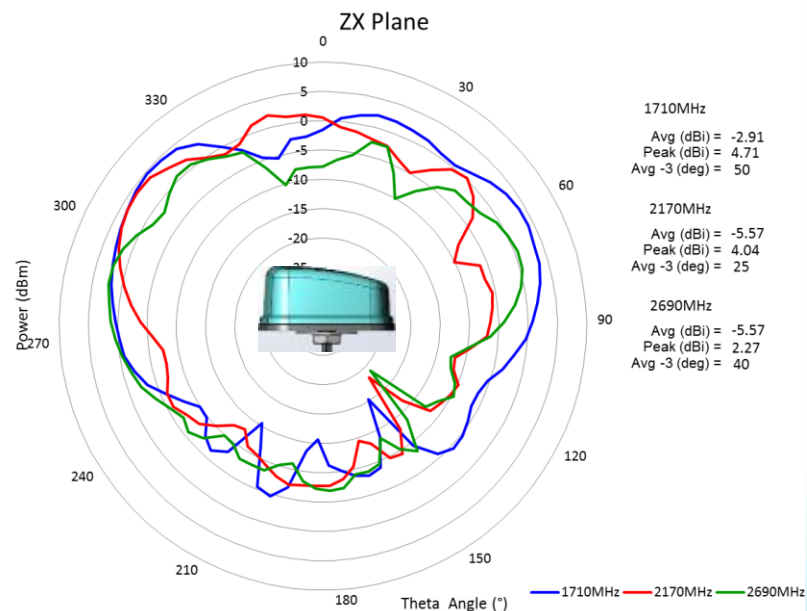


## CHARTS

### LTE2 antenna Y-Z plane radiation pattern at LTE high band\*\*

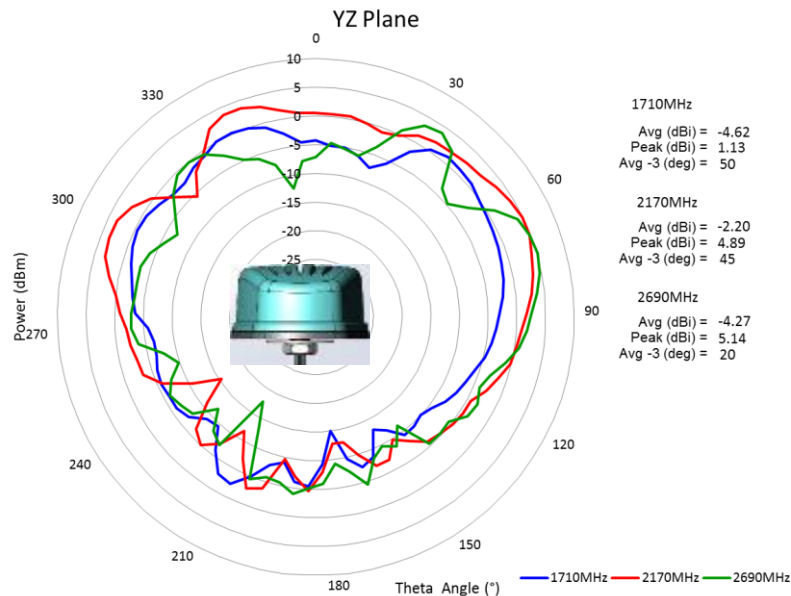


## CHARTS

### WiFi1 antenna X-Y plane radiation pattern at WiFi low band\*\*

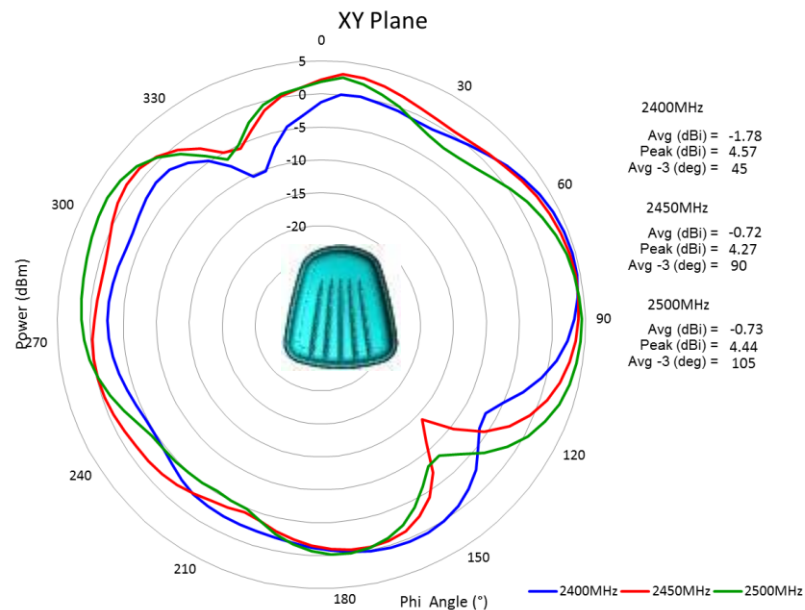


### WiFi1 antenna Z-X plane radiation pattern at WiFi low band\*\*

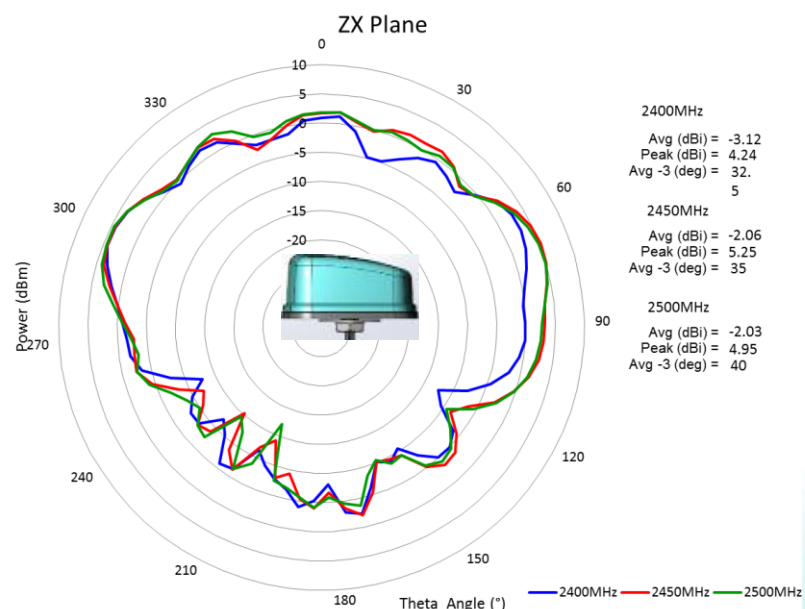


## CHARTS

### WiFi1 antenna Y-Z plane radiation pattern at WiFi low band\*\*

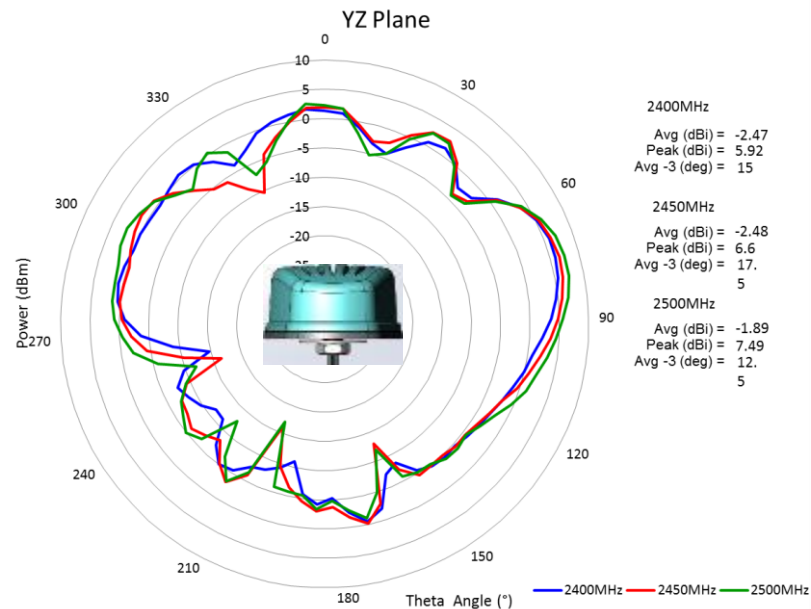


## CHARTS

### WiFi1 antenna X-Y plane radiation pattern at WiFi high band\*\*

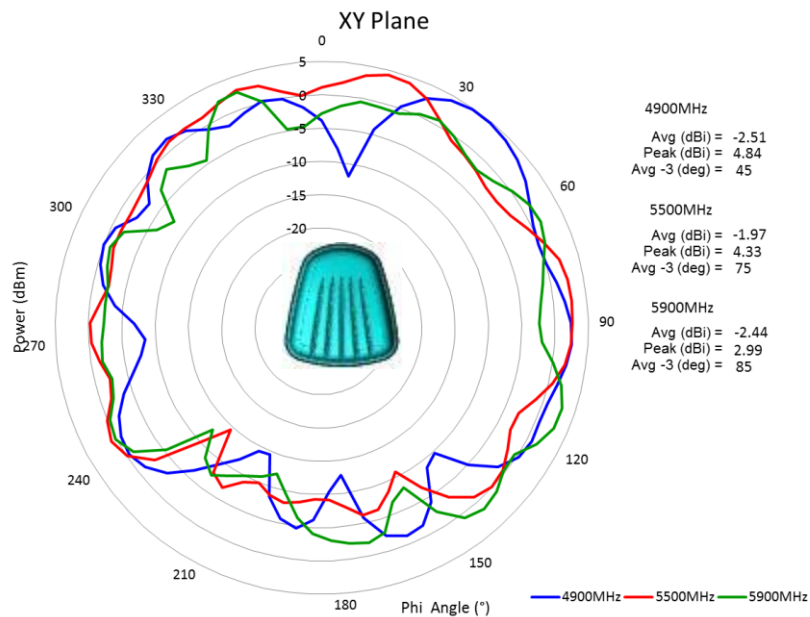

### WiFi1 antenna Z-X plane radiation pattern at WiFi high band\*\*

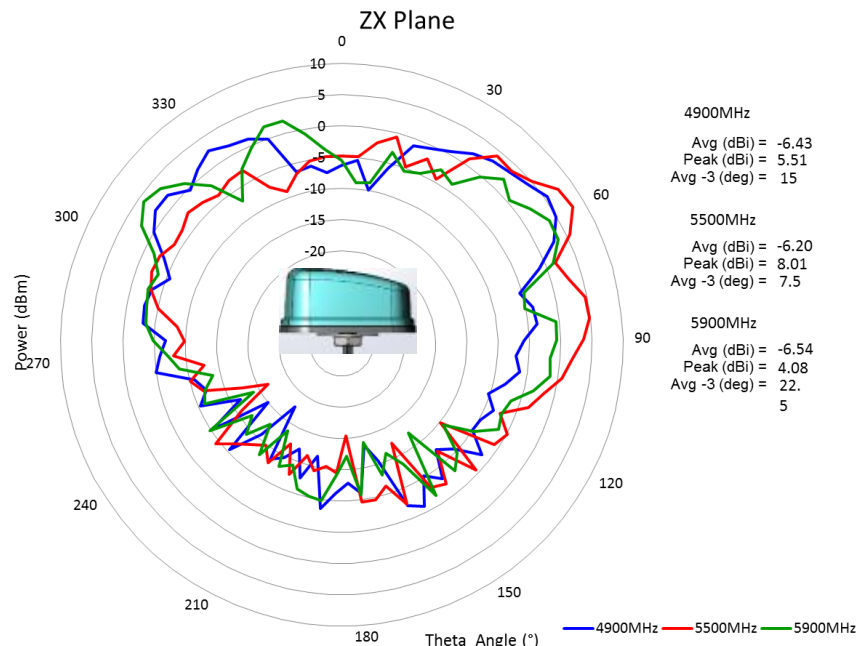

Issue: 1833


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


## CHARTS

### WiFi1 antenna Y-Z plane radiation pattern at WiFi high band\*\*

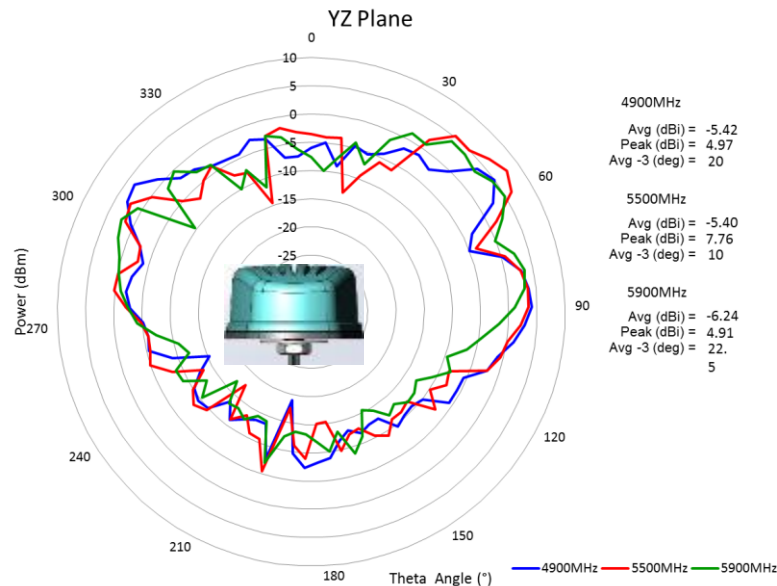


## CHARTS

### WiFi2 antenna X-Y plane radiation pattern at WiFi low band\*\*

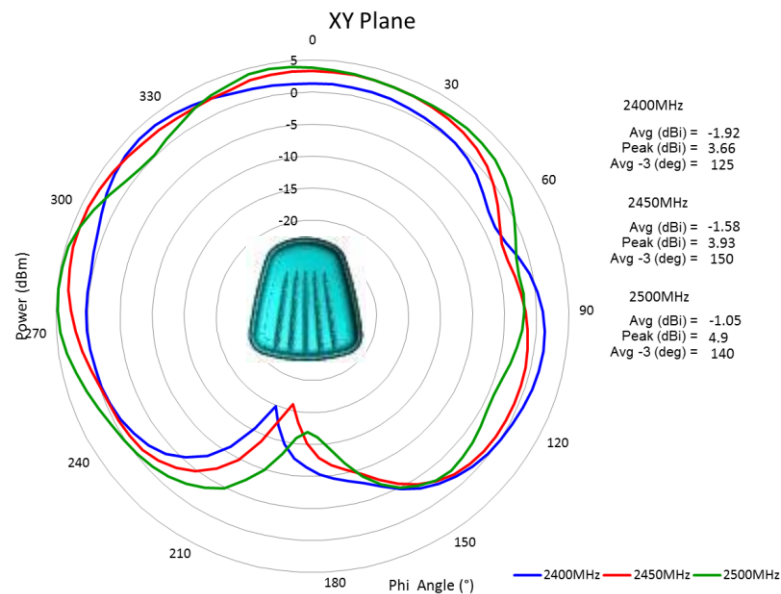


### WiFi2 antenna Z-X plane radiation pattern at WiFi low band\*\*

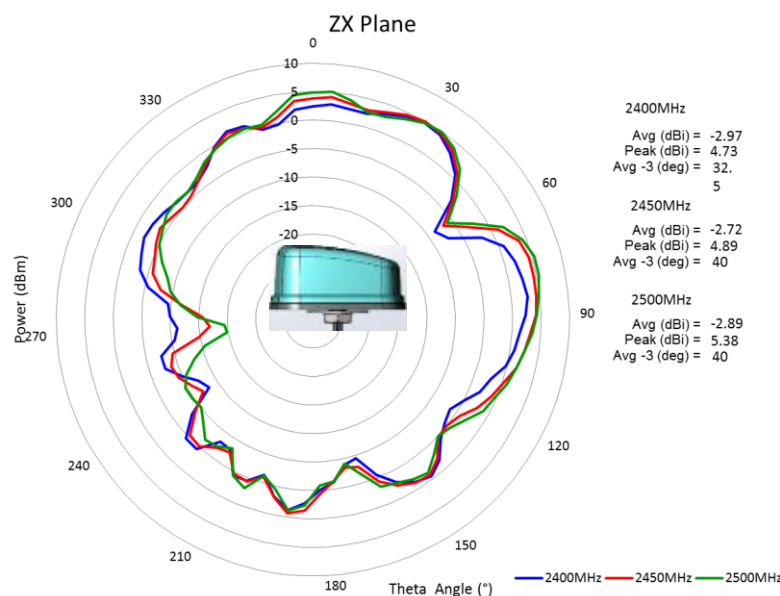


## CHARTS

### WiFi2 antenna Y-Z plane radiation pattern at WiFi low band\*\*

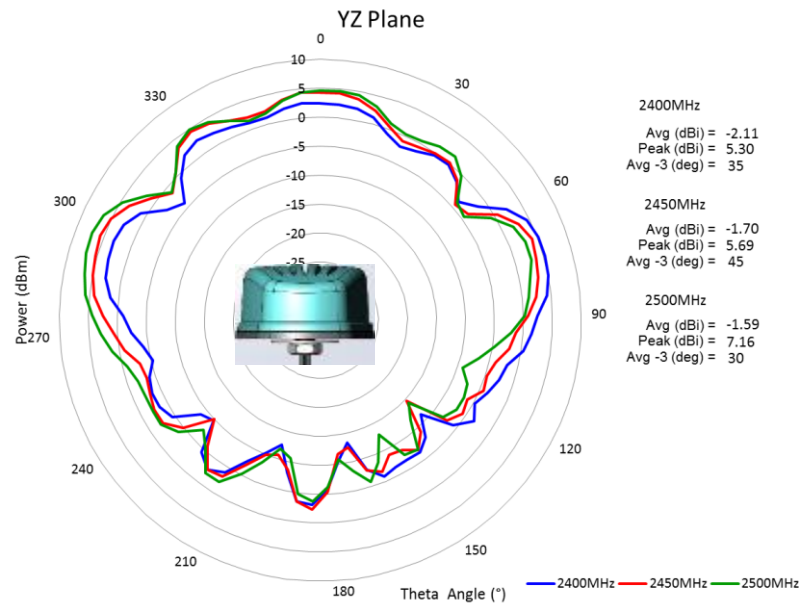


## CHARTS

### WiFi2 antenna X-Y plane radiation pattern at WiFi high band\*\*

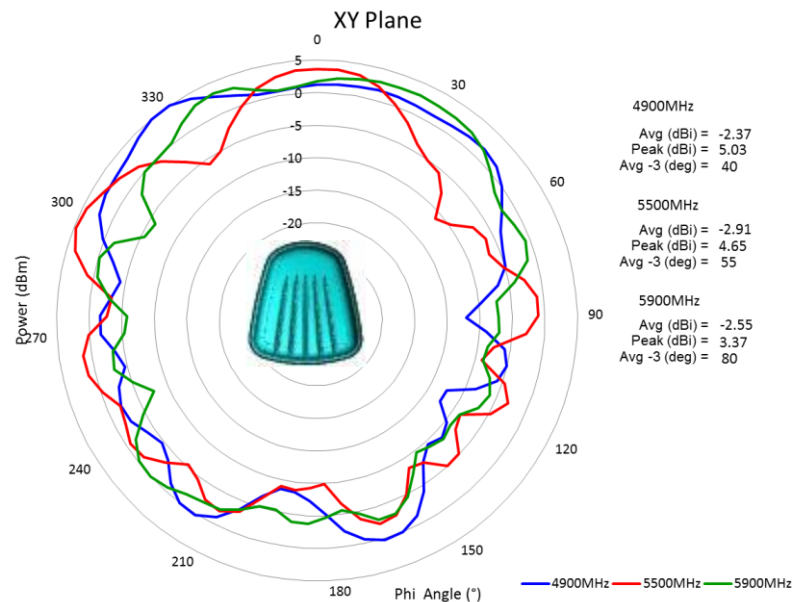


### WiFi2 antenna Z-X plane radiation pattern at WiFi high band\*\*

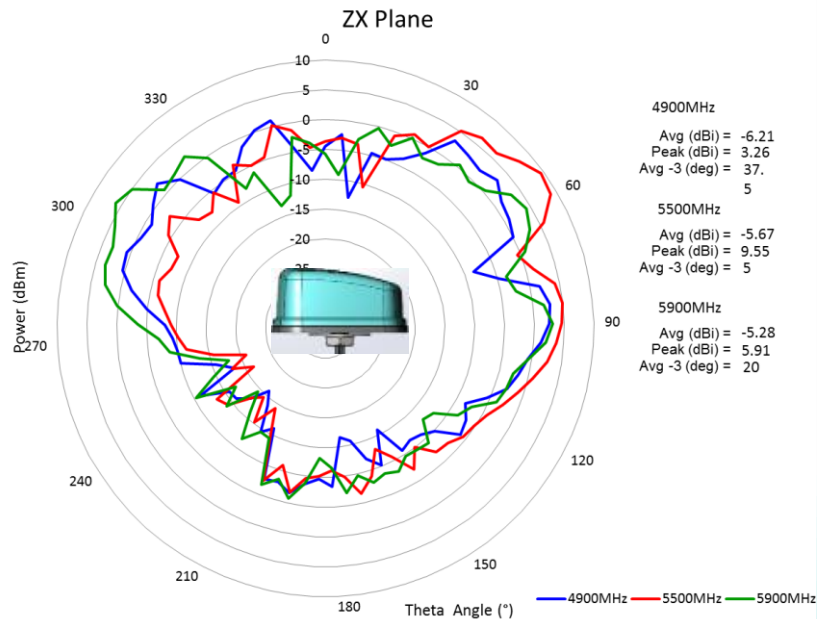


## CHARTS

### WiFi2 antenna Y-Z plane radiation pattern at WiFi high band\*\*

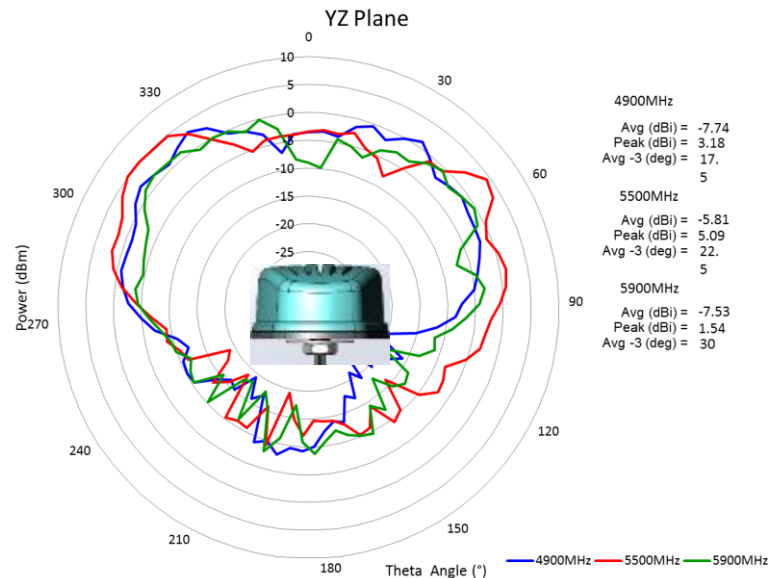


## CHARTS

### WiFi3 antenna X-Y plane radiation pattern at WiFi low band\*\*

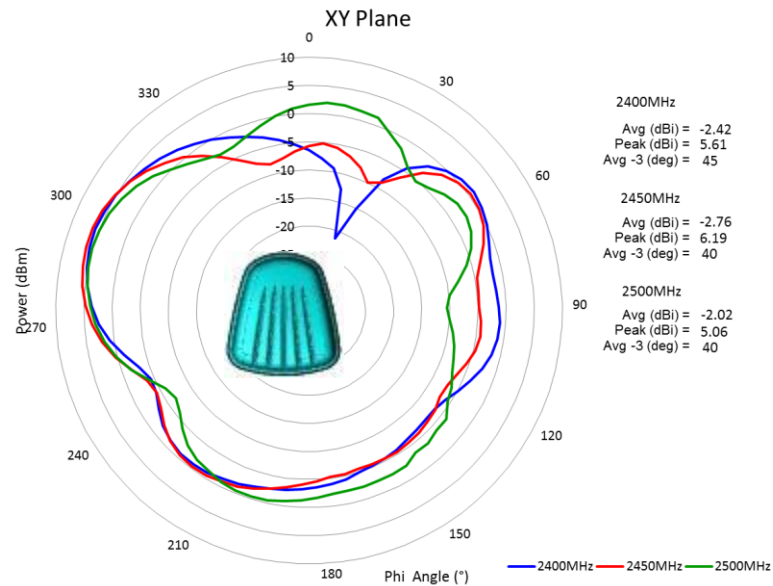


### WiFi3 antenna Z-X plane radiation pattern at WiFi low band\*\*

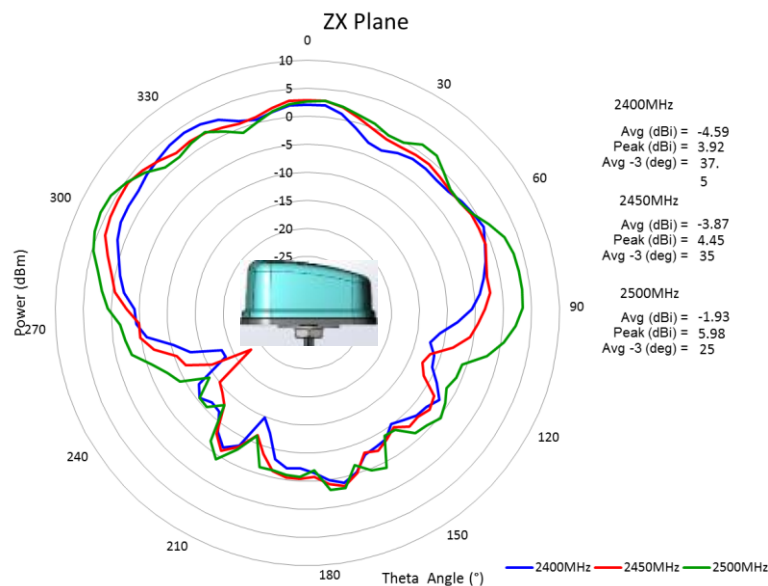


## CHARTS

### WiFi3 antenna Y-Z plane radiation pattern at WiFi low band\*\*

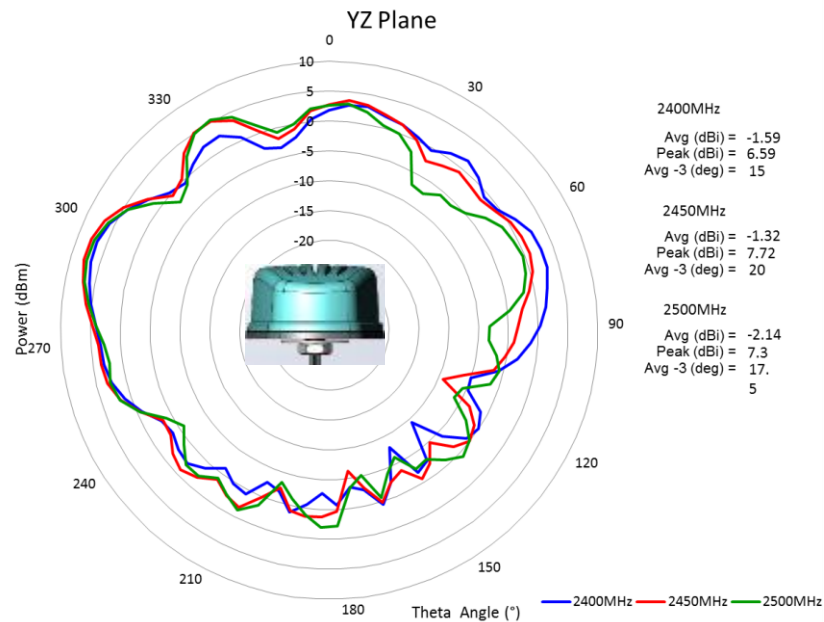


## CHARTS

### WiFi3 antenna X-Y plane radiation pattern at WiFi high band\*\*

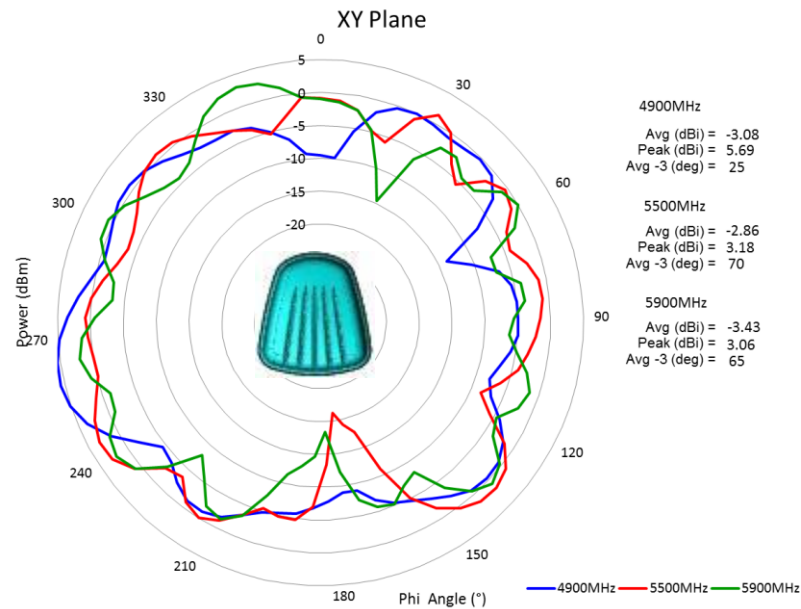


### WiFi3 antenna Z-X plane radiation pattern at WiFi high band\*\*

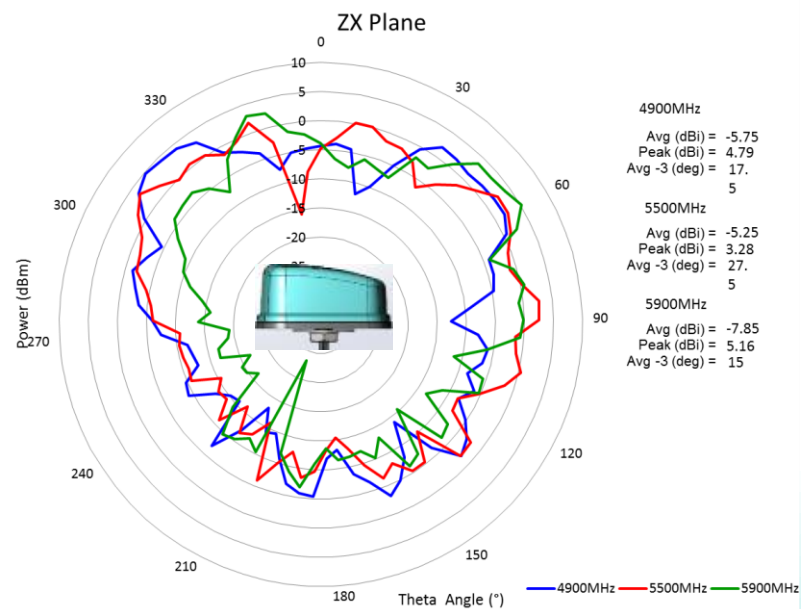



## CHARTS

### WiFi3 antenna Y-Z plane radiation pattern at WiFi high band\*\*


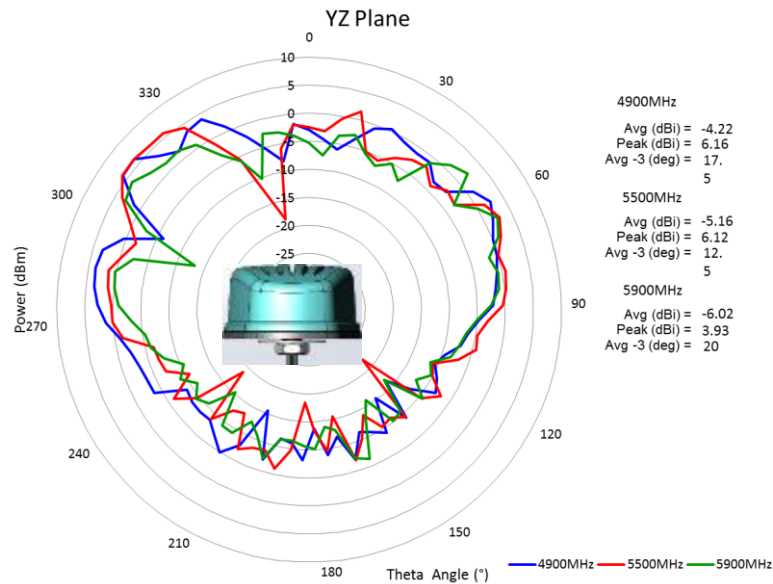


## CHARTS

### GNSS antenna, BD2 RHCP patterns, in free space\*

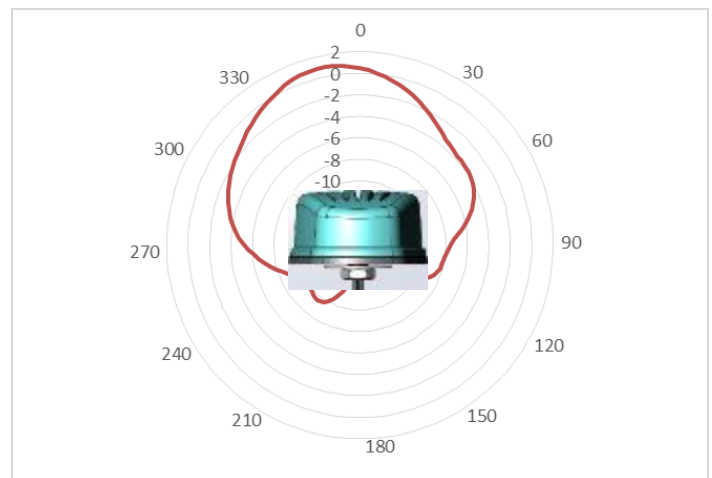
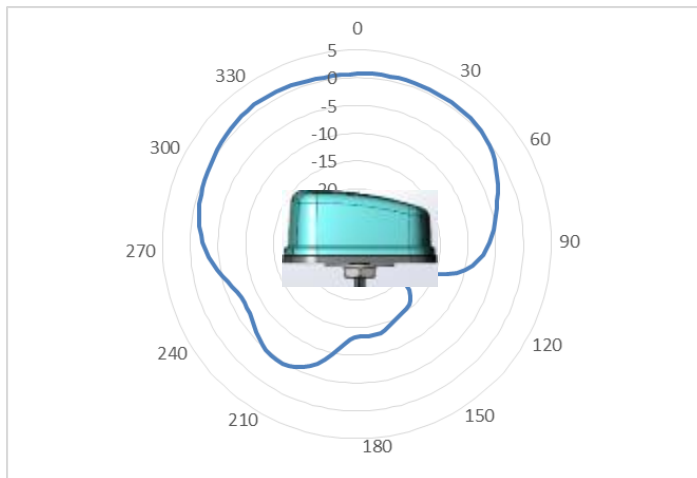


### GNSS antenna, GPS & Galileo RHCP patterns, in free space\*

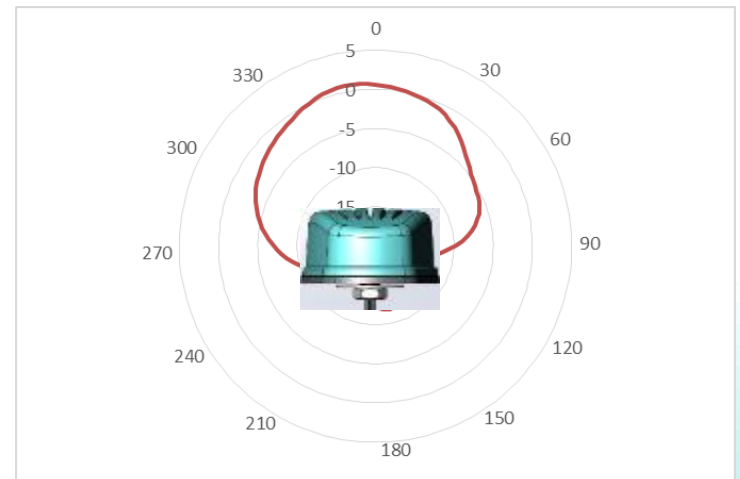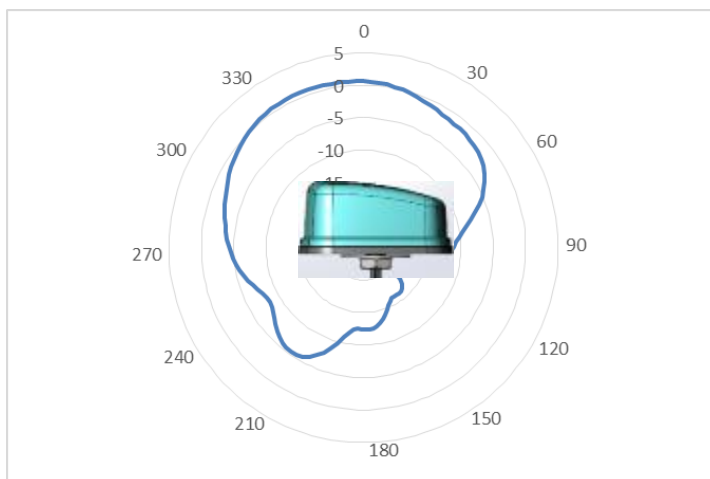

## CHARTS

GNSS antenna, GLONASS RHCP patterns, in free space\*

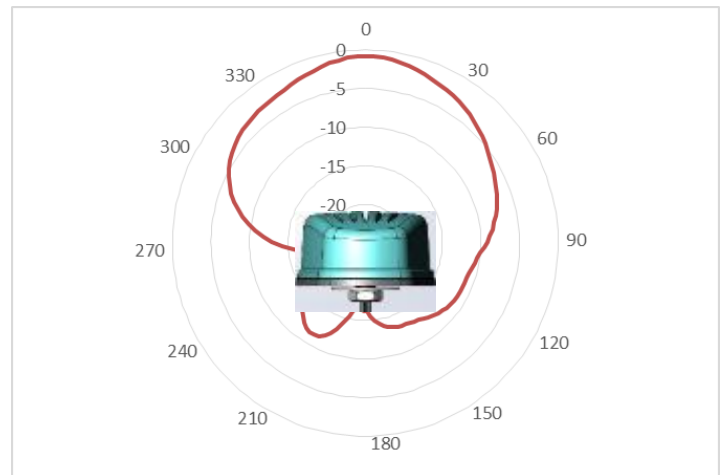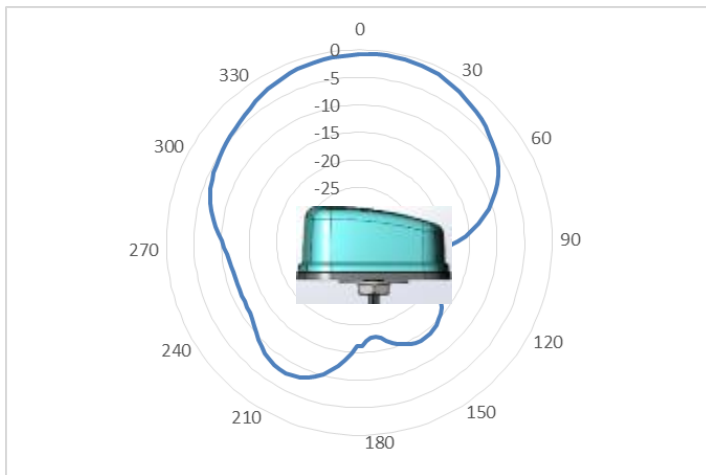

**Series: Panther**

**TECHNICAL DATA SHEET**

**Description: 2xMiMo LTE, 3xMiMo WiFi,  
GNSS Vehicle Mount Antenna**

**PART NUMBER: PAN62311DM, PAN62312DM,  
PAN62311DMR, PAN62312DMR**

**PACKAGING**

One antenna pack in one PE bag, 6 antennas in one box

Issue: 1833

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9