

# MODEL TL-5920



International size reference: C, ER26500

## TECHNICAL DATA

(Typical values @+ 25°C for batteries stored for one year or less)



■ Nominal capacity @ 3 mA, to 2 V	8.5 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	230 mA
■ Maximum pulse current capability	400 mA
■ Weight	49.5 g (1.75 oz)
■ Volume	26 cc
■ Operating temperature range	-55 °C to +85 °C
■ Li metal content	approx. 2.5 g
■ U.L. Component Recognition, MH 12193	

# TADIRAN LITHIUM BATTERIES

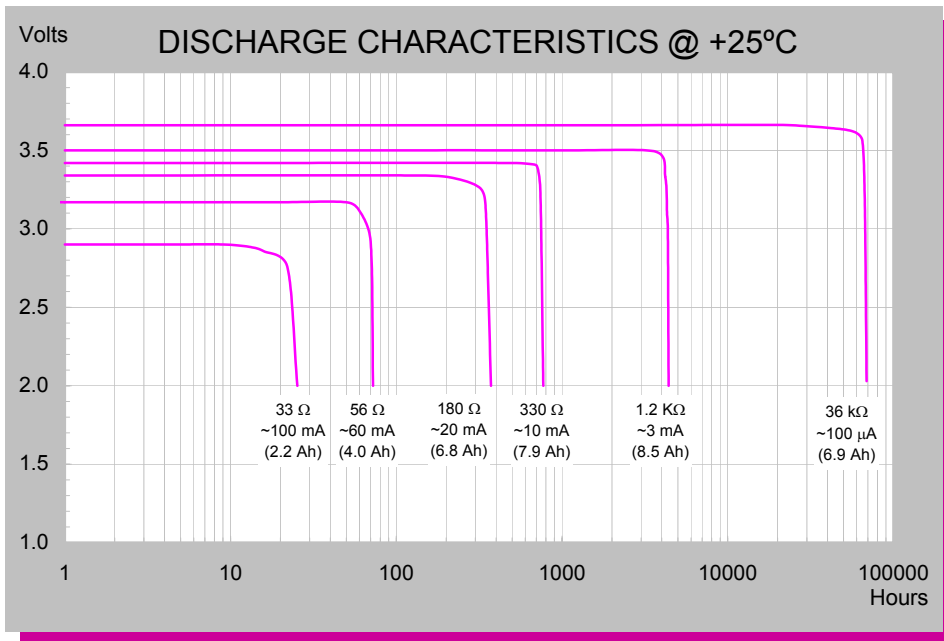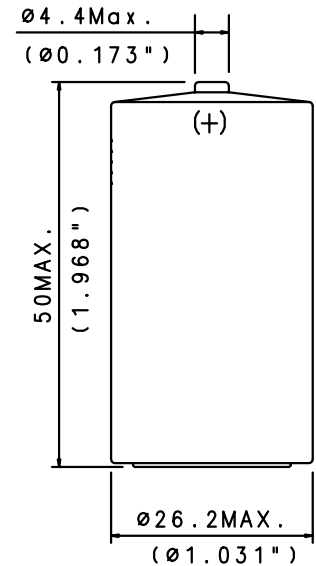

### TERMINATIONS & ORDERING NO.

SUFFIX- /S STANDARD	15-5920-21500
SUFFIX- /T SOLDER TABS	15-5920-31500
SUFFIX- /P AXIAL PINS	15-5920-41500

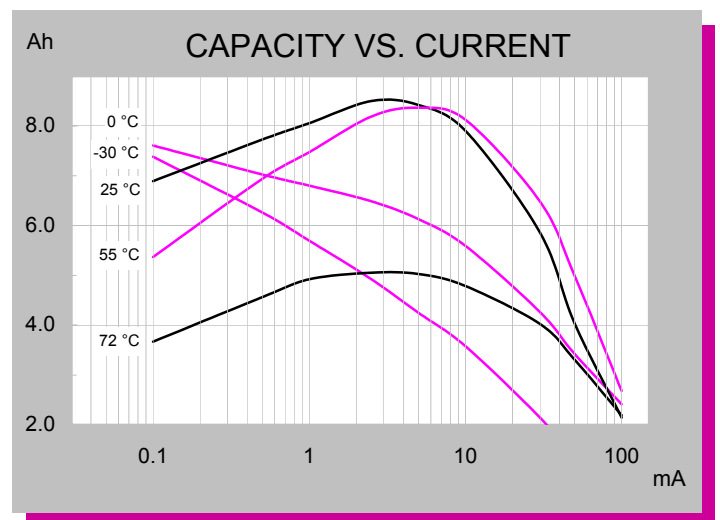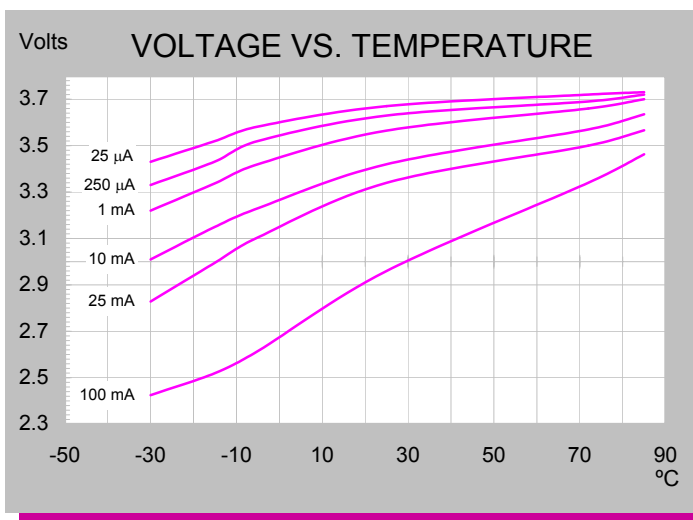

## iXtra - Long Term High Performance

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501879 Rev. B 11/08

# TL-5920


## CELL FEATURES

- 3.6 V Primary lithium-thionyl chloride (Li-SOCl<sub>2</sub>)
- Fast voltage recovery after long term storage and/or usage
- High energy density
- Low self discharge rate
- Bobbin construction
- Hermetic glass-to-metal-sealing
- Non-flammable electrolyte

# TADIRAN LITHIUM BATTERIES

## MAIN APPLICATIONS



- Utility meters (elect., water & gas)
- Automatic meter reading
- RF systems
- Sensors & monitoring systems
- Tracking systems
- Wireless security systems
- Automotive electronics
- Industrial electronics
- Ultra Low Power (ULP)

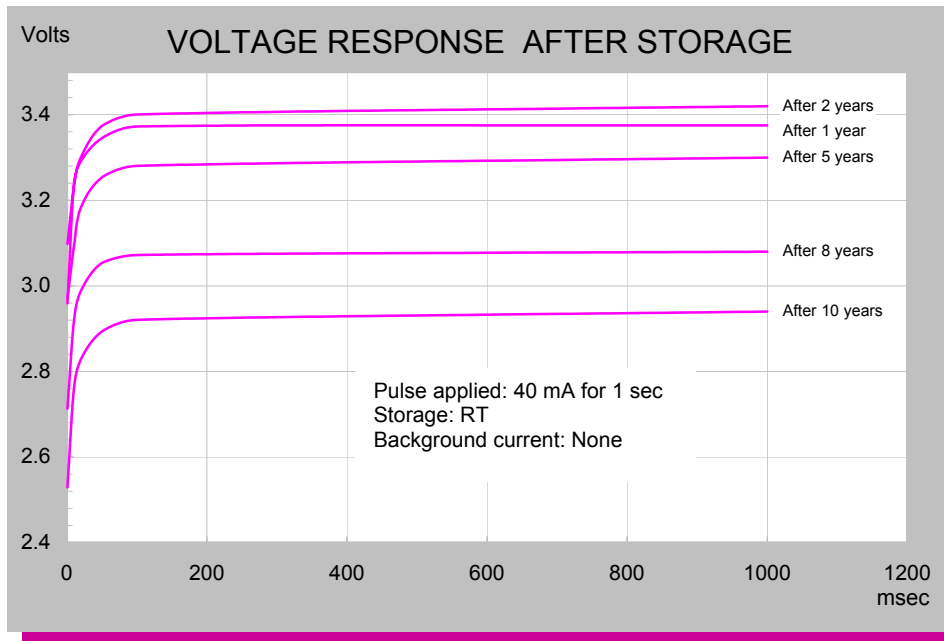

## STORAGE CONDITIONS

- Cells should be stored in a clean & dry (less than 30 % RH) area

For updated information please visit our website [www.tadiranbat.com](http://www.tadiranbat.com)

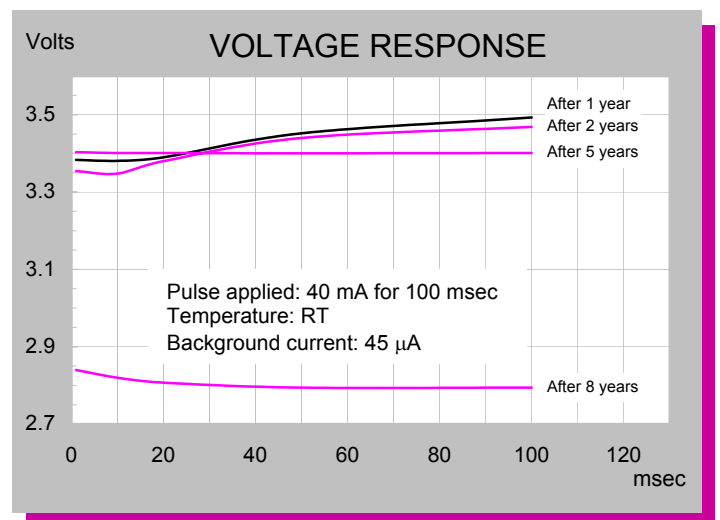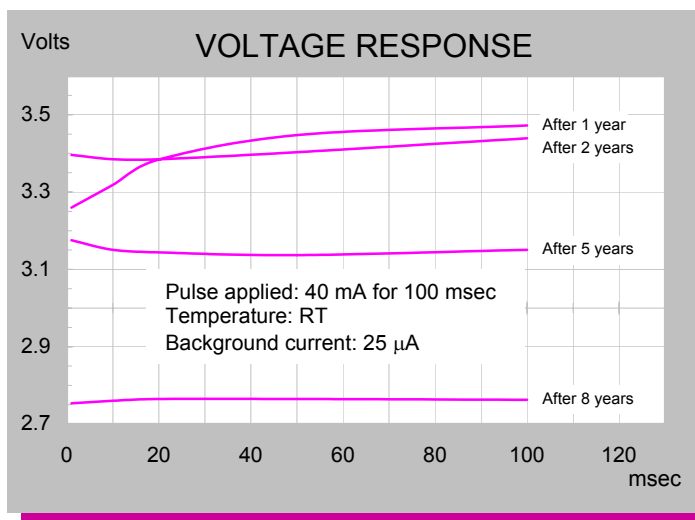

## *iXtra - Long Term High Performance*

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501879 Rev. B 11/08

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9