

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

**Part Number:** [0743003157](#)  
**Status:** **Active**  
**Overview:** [hdm](#)  
**Description:** 2.00mm (.079") Pitch HDM® Board-to-Board Daughtercard Receptacle, Vertical, Signal Module, with Guide, 144 Circuits, Mounted Height 17.00mm (.669"), Press-Fit Pin Length 3.50mm (.138")

**Documents:**  
[3D Model](#) [Product Specification PS-73780-999 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

|                                |                                |
|--------------------------------|--------------------------------|
| <b>General</b>                 |                                |
| Product Family                 | Backplane Connectors           |
| Series                         | <a href="#">74300</a>          |
| Application                    | Daughtercard, Mezzanine        |
| Component Type                 | PCB Receptacle                 |
| Overview                       | <a href="#">hdm</a>            |
| Product Name                   | HDM®                           |
| Style                          | N/A                            |
| <b>Physical</b>                |                                |
| Circuits (Loaded)              | 144                            |
| Circuits (maximum)             | 144                            |
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 250                            |
| First Mate / Last Break        | No                             |
| Guide to Mating Part           | Yes                            |
| Keying to Mating Part          | None                           |
| Material - Metal               | Copper-Nickel-Tin              |
| Material - Plating Mating      | Gold                           |
| Material - Plating Termination | Tin-Lead                       |
| Material - Resin               | High Temperature Thermoplastic |
| Number of Columns              | 24                             |
| Number of Pairs                | Open Pin Field                 |
| Number of Rows                 | 6                              |
| Orientation                    | Vertical                       |
| PC Tail Length (in)            | 0.138 In                       |
| PC Tail Length (mm)            | 3.50 mm                        |
| PCB Locator                    | No                             |
| PCB Retention                  | None                           |
| PCB Thickness Recommended (in) | 0.063 In                       |
| PCB Thickness Recommended (mm) | 1.60 mm                        |
| Packaging Type                 | Tube                           |
| Pitch - Mating Interface (in)  | 0.079 In                       |
| Pitch - Mating Interface (mm)  | 2.00 mm                        |
| Pitch - Term. Interface (in)   | 0.079 In                       |
| Pitch - Term. Interface (mm)   | 2.00 mm                        |
| Plating min: Mating (µin)      | 30                             |
| Plating min: Mating (µm)       | 0.76                           |
| Plating min: Termination (µin) | 30                             |
| Plating min: Termination (µm)  | .88                            |
| Polarized to PCB               | No                             |
| Stackable                      | Yes                            |
| Surface Mount Compatible (SMC) | Yes                            |
| Temperature Range - Operating  | -55°C to +105°C                |
| Termination Interface: Style   | Through Hole - Compliant Pin   |



image - Reference only

Series

**EU RoHS**  
**RoHS Compliant by Exemption**  
**REACH SVHC**  
**Contains SVHC: No**  
**Halogen-Free**  
**Status**  
**Not Reviewed**

**China RoHS**



Pb

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**  
[74300Series](#)

**Mates With**  
HDM® Board-to-Board Backplane Header  
[73642](#) , [73643](#) , [73644](#) , [74349](#) , [74428](#) ,  
[73769](#) , [73781](#) , [73770](#) , [73782](#) , [73783](#) ,  
[73771](#)

**Electrical**

|                               |          |
|-------------------------------|----------|
| Current - Maximum per Contact | 1A       |
| Data Rate                     | 1.0 Gbps |
| Real Signals (per 25mm)       | 76       |
| Shielded                      | Yes      |
| Voltage - Maximum             | 250V AC  |

**Material Info**



**Reference - Drawing Numbers**

|                       |              |
|-----------------------|--------------|
| Product Specification | PS-73780-999 |
| Sales Drawing         | SD-74300-002 |

HDM and High Density Metric are trademarks of Amphenol Corporation

This document was generated on 05/15/2010

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

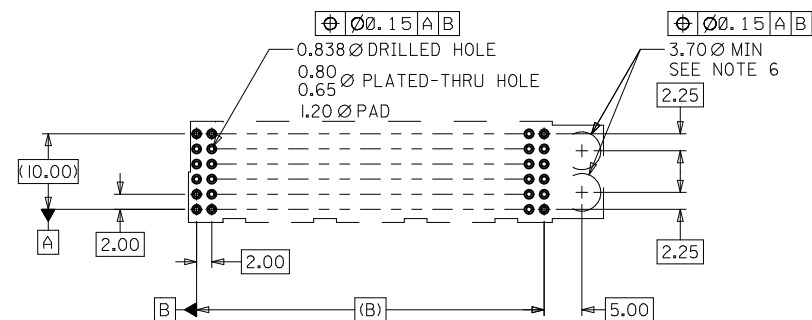

NOTES:

1. MATERIALS: HOUSING - LIQUID CRYSTAL POLYMER (LCP) BLACK  
TERMINALS - HIGH PERFORMANCE COPPER ALLOY
2. FINISH: SELECTIVE GOLD (Au) IN CONTACT AREA.  
2.50 MICROMETER MINIMUM THICKNESS.  
SELECTIVE TIN/LEAD (Sn/Pb) ON PRESS FIT TAILS.  
0.88 MICROMETER MINIMUM THICKNESS.  
NICKEL OVERALL.
3. THIS PART CONFORMS TO MOLEX PRODUCT SPEC PS-73780-999.
4. 144 CKT STACKING MODULE SHOWN FOR ILLUSTRATION PURPOSES.  
SEE CHART FOR TABULATED DIMENSIONS.
5. 74300-\*\*\*7 PARTS TO BE PACKAGED IN TUBES PER PK-70873-0872.  
ALL OTHER PARTS TO BE PACKAGED IN TUBES PER PK-70873-0900.
6. DEPENDING ON APPLICATION, THIS HOLE MAY BE NEEDED FOR  
CLEARANCE OF BACKPLANE GUIDE PIN. LOCATION OF HOLE WILL  
DEPEND ON LOCATION OF GUIDE PIN.
7. TRUE POSITION OF TAILS IS INSPECTED USING GAGE NUMBER  
73727-0014.
8. THIS PART CONFORMS TO MOLEX COSMETIC SPEC PS-45499-002 CLASS B.

74300 - \* | \* \*

2 = 72-CKT PRESS-FIT  
3 = 144-CKT PRESS-FIT

```
DIM "P"
4 = 3.00
5 = 3.50
6 = 4.00
```

| DIM | "H"  |
|-----|------|
| 3 = | 13.0 |
| 4 = | 14.0 |
| 5 = | 15.0 |
| 6 = | 16.0 |
| 7 = | 17.0 |

|                                                                                                                                    |             |                                                                                                                               |                                                                     |  |                                                                  |  |                                                                            |                        |                                                          |  |
|------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|--|------------------------------------------------------------------|--|----------------------------------------------------------------------------|------------------------|----------------------------------------------------------|--|
| UPDATE TO LEADED ONLY<br>EC NO: UCP2010-1860<br>DESIGN: JELTON 2010/01/25<br>CHW: JDSANLLEY 2006/02/14<br>APPR: SMILLER 2010/02/08 | DESCRIPTION | QUALITY SYMBOLS<br><div><div>F</div>=0</div> <div><div>E</div>=0</div> <div><div>F</div>=0</div>                              | GENERAL TOLERANCES (UNLESS SPECIFIED)                               |  | DIMENSION STYLE<br>MM ONLY                                       |  | SCALE                                                                      | DESIGN UNITS<br>METRIC | <div><div></div><div></div></div> THIRD ANGLE PROJECTION |  |
|                                                                                                                                    |             |                                                                                                                               | <div><div>mm</div><div>INCH</div></div>                             |  | <div><div>DRAWN BY</div><div>DATE</div></div> JJONIAK 2006/02/14 |  | TITLE<br>SALES ASSY, HDM LEADED DAUGHTERCARD STACKING MODULE, GUIDE OPTION |                        |                                                          |  |
|                                                                                                                                    |             |                                                                                                                               |                                                                     |  | <div><div>CHECKED BY</div><div>DATE</div></div> SREED 2006/02/14 |  |                                                                            |                        |                                                          |  |
|                                                                                                                                    |             |                                                                                                                               | <div><div>APPROVED BY</div><div>DATE</div></div> SMILLER 2010/02/08 |  | <div><div>MATERIAL NO.</div></div>                               |  | <div><div>DOCUMENT NO.</div></div>                                         |                        | <div><div>SHEET NO.</div></div>                          |  |
|                                                                                                                                    |             |                                                                                                                               | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS                |  | SEE TABLE                                                        |  | SD-74300-002                                                               |                        | 1 OF 1                                                   |  |
| REV                                                                                                                                |             | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                                                                     |  |                                                                  |  |                                                                            |                        |                                                          |  |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9