

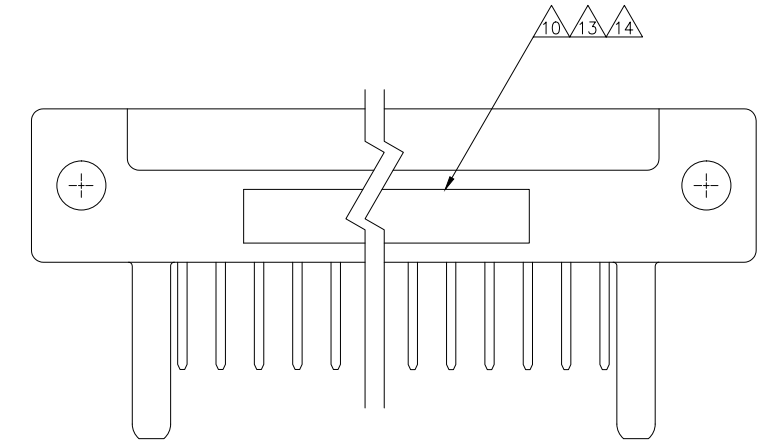


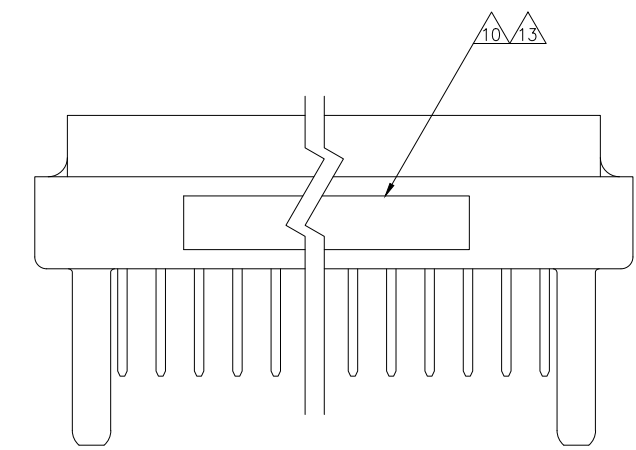

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 30JUN2015 RAGHAV SATISH CHK 30JUN2015 CHARLES THOMAS		ETE TE Connectivity	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
INCHES		APVC 30JUN2015 CHARLES THOMAS PRODUCT SPEC — APPLICATION SPEC —		ASSEMBLY, AMP BLADE TAB HOUSING —	
		0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005 [0.13] 4 PLC ± — ANGLES ± — FINISH —		SIZE CAGE CODE DRAWING NO A1 00779 C=582152	
MATERIAL		WEIGHT —		RESTRICTED TO —	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 of 3 REV AW	

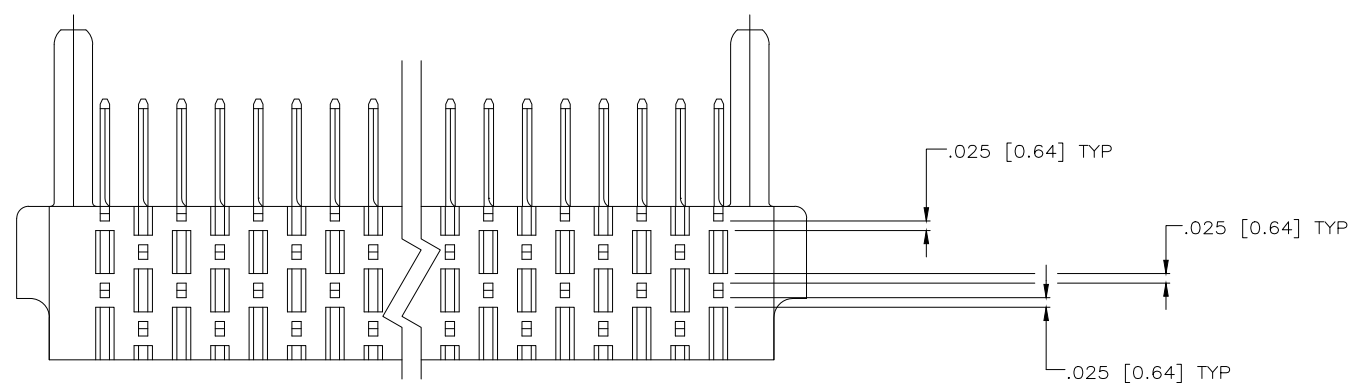

VIEW Z-Z

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 30JUN2015 RAGHAV SATISH CHK 30JUN2015 CHARLES THOMAS APVD 30JUN2015 CHARLES THOMAS		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 P/LC ± - 1 P/LC ± - 2 P/LC ± - 3 P/LC ± .005 [0.13] 4 P/LC ± - ANGLES ± - FINISH		NAME ASSEMBLY, AMP BLADE TAB HOUSING -	
		PRODUCT SPEC - APPLICATION SPEC -		SIZE A1	
MATERIAL SEE SHEET 1		WEIGHT -		CAGE CODE 00779	
SEE SHEET 1		DRAWING NO C-582152		RESTRICTED TO -	
CUSTOMER DRAWING				SCALE	4:1
				SHEET	2 of 3
				REV	AW

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DF

HO

P

LTR

DESCRIPTION

DATE

DWN

APVD

-

SEE SHEET 1

-

-

-

WITH MOUNTING HOLES

WITHOUT MOUNTING HOLES

PART NO.	NO OF CONT.	A	B	C	D	E	P.C. BD. THICKNESS	NOTE	MARKING
3-582152-1	17	2.390	1.764	2.130	.120	.265	.0625		-
3-582152-2	23	2.990	2.364	2.730	.120	.265	.0625		-
3-582152-3	29	3.590	2.964	3.330	.120	.265	.0625		-
3-582152-4	35	4.190	3.564	3.930	.120	.265	.0625		-
3-582152-5	41	4.790	4.164	4.530	.120	.265	.0625		-
3-582308-1	47	5.623	4.764	5.363	.120	.381	.0625		-
582852-4	41	4.790	4.164	4.530	.120	.265	.0625		-
4-582308-1	47	5.623	4.764	5.363	.120	.381	.0625		OBSOLETE-
4-582152-1	17	2.390	1.764	2.130	.120	.265	.0625		OBSOLETE-
4-582152-3	29	3.590	2.964	3.330	.120	.265	.0625		OBSOLETE-
5-582843-0	23	2.990	2.364	2.730	.120	.265	.0625		-
5-582843-1	47	5.623	4.764	5.363	.120	.381	.0625		-
582843-2	17	2.390	1.764	2.130	.120	.265	.0625	M 21097/ 14-01	-
582843-3	23	2.990	2.364	2.730	.120	.265	.0625	M 21097/ 14-04	-
582843-4	29	3.590	2.964	3.330	.120	.265	.0625	M 21097/ 14-07	-
582843-5	35	4.190	3.564	3.930	.120	.265	.0625	M 21097/ 14-10	-
582843-6	41	4.790	4.164	4.530	.120	.265	.0625	M 21097/ 14-13	-
582843-7	47	5.623	4.764	5.363	.120	.381	.0625	M 21097/ 14-16	-
582907-1	29	3.590	2.964	3.330	.120	.265	.0625		OBSOLETE-
6-582152-1	17	2.390	1.764	2.130	.152	.265	.0937		OBSOLETE-
6-582152-2	23	2.990	2.364	2.730	.152	.265	.0937		OBSOLETE-
6-582152-3	29	3.590	2.964	3.330	.152	.265	.0937		OBSOLETE-
6-582152-4	35	4.190	3.564	3.930	.152	.265	.0937		-
6-582152-5	41	4.790	4.164	4.530	.152	.265	.0937		-
6-582308-1	47	5.623	4.764	5.363	.152	.381	.0937		-
7-582308-1	47	5.623	4.764	5.363	.152	.381	.0937		OBSOLETE-
1-582843-4	17	2.390	1.764	2.130	.152	.265	.0937	M 21097/ 14-02	-
582843-1	23	2.990	2.364	2.730	.152	.265	.0937	M 21097/ 14-05	-
1-582843-5	29	3.590	2.964	3.330	.152	.265	.0937	M 21097/ 14-08	-
1-582843-6	35	4.190	3.564	3.930	.152	.265	.0937	M 21097/ 14-11	-
1-582843-7	41	4.790	4.164	4.530	.152	.265	.0937	M 21097/ 14-14	-
1-582843-8	47	5.623	4.764	5.363	.152	.381	.0937	M 21097/ 14-17	-
9-582152-1	17	2.390	1.764	2.130	.183	.265	.125		OBSOLETE-
9-582152-2	23	2.990	2.364	2.730	.183	.265	.125		OBSOLETE-
9-582152-3	29	3.590	2.964	3.330	.183	.265	.125		OBSOLETE-
9-582152-4	35	4.190	3.564	3.930	.183	.265	.125		OBSOLETE-
9-582152-5	41	4.790	4.164	4.530	.183	.265	.125		-
9-582308-1	47	5.623	4.764	5.363	.183	.381	.125		OBSOLETE-
2-582843-5	17	2.390	1.764	2.130	.183	.265	.125	M 21097/ 14-03	-
2-582843-6	23	2.990	2.364	2.730	.183	.265	.125	M 21097/ 14-06	-
2-582843-7	29	3.590	2.964	3.330	.183	.265	.125	M 21097/ 14-09	-
2-582843-8	35	4.190	3.564	3.930	.183	.265	.125	M 21097/ 14-12	-
2-982843-9	41	4.790	4.164	4.530	.183	.265	.125	M 21097/ 14-15	-
3-582843-0	47	5.623	4.764	5.363	.183	.381	.125	M 21097/ 14-18	-

PART NO.	NO OF CONT.	A	B	C	D	E	P.C. BD. THICKNESS	NOTE	MARKING
3-582152-6	17	2.070	1.764	-	.120	-	.0625		OBSOLETE-
3-582152-7	23	2.670	2.364	-	.120	-	.0625		-
3-582152-8	29	3.270	2.964	-	.120	-	.0625		-
3-582152-9	35	3.870	3.564	-	.120	-	.0625		-
3-582152-0	41	4.470	4.164	-	.120	-	.0625		-
3-582308-2	47	5.070	4.764	-	.120	-	.0625		-
2-582152-9	35	3.870	3.564	-	.120	-	.0625		-
582152-1	23	2.670	2.364	-	.120	-	.0625		-
582152-2	47	5.070	4.764	-	.120	-	.0625		-
582152-3	35	3.870	3.564	-	.120	-	.0625		-
582843-8	17	2.070	1.764	-	.120	-	.0625	M 21097/15-01	-
582843-9	23	2.670	2.364	-	.120	-	.0625	M 21097/15-04	-
1-582843-0	29	3.270	2.964	-	.120	-	.0625	M 21097/15-07	-
1-582843-1	35	3.870	3.564	-	.120	-	.0625	M 21097/15-10	-
1-582843-2	41	4.470	4.164	-	.120	-	.0625	M 21097/15-13	-
1-582843-3	47	5.070	4.764	-	.120	-	.0625	M 21097/15-16	-
6-582152-6	17	2.070	1.764	-	.152	-	.0937		OBSOLETE-
6-582152-7	23	2.670	2.364	-	.152	-	.0937		-
6-582152-8	29	3.270	2.964	-	.152	-	.0937		OBSOLETE-
6-582152-9	35	3.870	3.564	-	.152	-	.0937		OBSOLETE-
6-582152-0	41	4.470	4.164	-	.152	-	.0937		-
6-582308-2	47	5.070	4.764	-	.152	-	.0937		-
1-582843-9	17	2.070	1.764	-	.152	-	.0937	M 21097/15-02	-
2-582843-0	23	2.670	2.364	-	.152	-	.0937	M 21097/15-05	-
2-582843-1	29	3.270	2.964	-	.152	-	.0937	M 21097/15-08	-
2-582843-2	35	3.870	3.564	-	.152	-	.0937	M 21097/15-11	-
2-582843-3	41	4.470	4.164	-	.152	-	.0937	M 21097/15-14	-
2-582843-4	47	5.070	4.764	-	.152	-	.0937	M 21097/15-17	-
9-582152-6	17	2.070	1.764	-	.183	-	.125		OBSOLETE-
9-582152-7	23	2.670	2.364	-	.183	-	.125		OBSOLETE-
9-582152-8	29	3.270	2.964	-	.183	-	.125		OBSOLETE-
9-582152-9	35	3.870	3.564	-	.183	-	.125		OBSOLETE-
9-582152-0	41	4.470	4.164	-	.183	-	.125		OBSOLETE-
9-582308-2	47	5.070	4.764	-	.183	-	.125		OBSOLETE-
3-582843-1	17	2.070	1.764	-	.183	-	.125	M 21097/15-03	-
3-582843-2	23	2.670	2.364	-	.183	-	.125	M 21097/15-06	-
3-582843-3	29	3.270	2.964	-	.183	-	.125	M 21097/15-09	-
3-582843-4	35	3.870	3.564	-	.183	-	.125	M 21097/15-12	-
3-582843-5	41	4.470	4.164	-	.183	-	.125	M 21097/15-15	-
3-582843-6	47	5.070	4.764	-	.183	-	.125	M 21097/15-18	-

1. TAB-HOUSING ASSEMBLY MATES WITH AMP P/N 3-582151 SERIES.

2. BLADE CENTER LINE TO BE MEASURED FROM THE CENTER LINE FORMED BY THE ALIGNMENT PINS & AS LONG AS THE BLADES FALL WITHIN TOLERANCES INDICATED, THE ALLOWABLE WARPAGE IS INDEPENDENT OF THE BLADES & BECOMES A MEASUREMENT OF THE OUTSIDE SURFACE OF THE TAB-HOUSING & DOES NOT EFFECT THE MATING OF THIS TAB-HOUSING WITH 582151.

3. MOUNTING HOLES.

4. POST TO BE SOLDER DIPPED. CONN. MUST MEET REQUIREMENTS OF AMP SPEC 109-11-1.

5. CONTACT MATL.; GILDING METAL. GOLD OVER NICKEL.

6. TOLERANCE NON CUMULATIVE.

7. TAB-HOUSING MATL.; DIALLYL PHTHALATE, GLASS FILLED PER MIL-M-14, TYPE S.D.G.-F. COLOR; GREEN.

8. CUT OUT FOR KEYING BOSS, LOCATED WHERE REQD. (OPTIONAL)

9. FROM EDGE OF P.C. BOARD TO FACE OF TAB-HOUSING.

10. TYCO ELECTRONICS P/N NOT TO BE MARKED ON PART. AMP, DATE CODE, AND CUSTOMER PART NO. MARKED PER TABLE.

11. CONTACT FINISH; .0001 THK. GOLD, OVER NICKEL.

12. TAB-HOUSING MATL.; COLOR, GREY.

13. AMP, TYCO ELECTRONICS PART NO. AND DATE CODE MARKED PER TABLE IN THIS APPROX AREA.

14. CUSTOMER PART NO. MARKED PER TABLE IN THIS APPROX AREA.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES



MATERIAL SEE SHEET 1

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0. PLC ± .005 [0.13]

1. PLC ± .005 [0.13]

2. PLC ± .005 [0.13]

3. PLC ± .005 [0.13]

4. PLC ± .005 [0.13]

ANGLES ± .5°

FINISH SEE SHEET 1

DWN RAGHAV SATISH 30JUN2015

CHK CHARLES THOMAS 30JUN2015

APVD CHARLES THOMAS 30JUN2015

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

TE Connectivity

ASSEMBLY, AMP BLADE TAB HOUSING

SIZE A1

CAGE CODE 00779

DRAWING NO. 582152

RESTRICTED TO

SCALE 4:1

SHEET 3 OF 3

REV AV

4806 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9