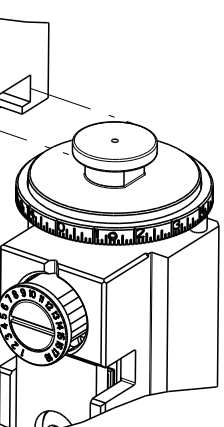


8	7
THIS DRAWING IS UNPUBLISHED.	
RELEASED FOR PUBLICATION	
20	
© COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.	

ATLANTIC VERSION TERMINATOR INTERFACE ADAPTER	PART NUMBER	REVISION	DESCRIPTION
	2266111-1	A	FINE CRIMP HEIGHT ADJUST
	2266111-2	A	FINE CRIMP HEIGHT ADJUST
	2266111-5	A	FINE CRIMP HEIGHT ADJUST
	2266111-6	A	NON-CRIMP HEIGHT ADJUST
	2266111-7	A	FINE CRIMP HEIGHT ADJUST
	7-2266111-7	A	CRIMP TOOLING KIT
	7-2266111-8	A	APPLICATOR CONVERSION KIT

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	1.88 mm [.074]	F
INSUL	1.32 mm [.052]	O

15 APPLICATOR CONVERSION KIT	
PART NUMBER	INSULATION DIAMETER
7-2266110-8	Ø 1.60-2.39mm [.063-.094]
7-2266111-8	Ø 1.27-1.91mm [.050-.075]


APPLICATOR INSTRUCTIONS
408-10389



TERMINAL DATA: DEUTSCH TERMINAL DEUTSCH CRIMP SPECIFICATION			
TERMINAL NAME: STAMPED CONTACT PIN SIZE 16			
WIRE STRIP LENGTH 3.81-5.09 mm [1.50-.200 IN]		INSULATION DIAMETER RANGE Ø1.27-1.91 mm [0.050-.075 IN]	
TERMINAL APPLICATION SPECIFICATION 0425-059-0000 Rev L		-	-
TERMINALS APPLIED		13	
TE TERMINAL	DEUTSCH TERMINAL	TE TERMINAL	DEUTSCH TERMINAL
286503-4	1060-16-0622	286503-5	1060-16-0644
1-286503-3	1060-16-0677	286503-6	1060-16-0688

TERMINAL DATA: DEUTSCH TERMINAL DEUTSCH CRIMP SPECIFICATION			
TERMINAL NAME: STAMPED CONTACT SOCKET SIZE 16			
WIRE STRIP LENGTH 3.81-5.09 mm [1.50-.200 IN]		INSULATION DIAMETER RANGE Ø1.27-1.91 mm [0.050-.075 IN]	
TERMINAL APPLICATION SPECIFICATION	0425-059-0000 Rev L	-	-
TERMINALS APPLIED 			
TE TERMINAL	DEUTSCH TERMINAL	TE TERMINAL	DEUTSCH TERMINAL
286504-4	1062-16-0622	286504-5	1062-16-0644
1-286504-4	1062-16-0677	286504-6	1062-16-0688

WIRE SIZE			CRIMP HEIGHT mm [INCH]		CRIMP HEIGHT REFERENCE SETTING 
16 AWG			1.27+0.03/-0.05 [0.050+0.001/-0.002]		5.7
1.00mm2			1.27+0.03/-0.05 [0.050+0.001/-0.002]		5.6
18 AWG			1.24+0.03/-0.05 [0.049+0.001/-0.002]		5.9
0.75mm2			1.22+0.03/-0.05 [0.048+0.001/-0.002]		6.1
20 AWG			1.22+0.03/-0.05 [0.048+0.001/-0.002]		6.0
0.50mm2			1.14+0.03/-0.05 [0.045+0.001/-0.002]		7.0



- 1 RECOMMENDED SPARE PARTS
- 2 GREASE BEARING SURFACES LIGHTLY
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- 4 APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
 MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2266111-4
 PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2266111-4
 SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2266111-5
 SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2266111-6
5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
- 6 APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 62 & 242.
 FOR -6 ONLY APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 37 & 242.
- 7 GREASE THREADS, GROOVE AND O-RING ON ITEMS 35 & 252.
- 8 MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.
- 9 CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- 10 SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
- 11 TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON THE BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
- 12 WHEN ASSEMBLING A NON CRIMP HEIGHT ADJUST APPLICATOR (-6) USE SHIMS FROM ITEM 260 TO ACHIEVE A NOMINAL SHIM HEIGHT OF 4.53.
- 13 DIMENSION 1.00 ± 0.50 [0.039 $\pm$ 0.019] APPLIES TO PIN TERMINALS 1060-06-06XX.
- 14 DIMENSION 7.60 ± 0.50 [0.299 $\pm$ 0.019] APPLIES TO SOCKET TERMINALS 1062-06-06XX.
- 15 SEE APPROPRIATE APPLICATOR LOG SHEETS FOR APPLIED TERMINALS, WIRE RANGE AND

-	-	-	1	-	-	-	2119957-2	APPLICATOR SHIM PACK	260
-	-	1	-	1	1	1	8-21084-0	O-RING, .676 ID, .070 DIA. MAT.	252
-	-	-	-	-	1	-	2119640-1	PUSH ROD, AIR FEED	250
-	-	-	-	-	1	-	2079988-1	BUSHING, LCH5-12, MISUMI	249
-	-	-	-	-	1	-	2119641-1	FEED CAM, AIR FEED	248
-	-	1	-	1	1	1	2119798-1	DETENT PIN	247
-	-	1	-	1	1	1	1-22279-3	SPRING, COMPRESSION	246
-78	-77	-7	-6	-5	-2	-1	PART NO	DESCRIPTION	ITEM NO

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)


		2				I		
SET UP GAUGE 211959-1		LOC A	DIST 66	REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
	AZ	ECR-14-003873			14MAR2014	RK	GB	

-	-	-	1	-	-	-	2119758-1	RAM, AMP STYLE, SIDE FEED, NON-ADJ.	245
-	-	-	1	1	1	1	2119082-9	CAM, SNAIL, INSULATION ADJUSTMENT	244
-	-	-	1	1	1	1	2079764-1	WASHER, WAVE SPRING, CREST-TO-CREST	243
-	-	-	1	1	1	1	2119083-1	RETAINER, INSULATION DIAL	242
-	-	-	1	1	1	1	7-18023-7	SCR, SKT HD CAP M3 X 4.0	241
-	-	-	2	2	-	-	2168400-6	SHCS, LOW HEAD, RoHS, M5 X 16	240
-	-	-	-	-	-	1	2119580-1	MECHANICAL FEED ASSEMBLY	239
-	-	-	-	-	1	-	2063440-1	AIR FEED MODULE	238
-	-	-	1	1	-	-	2119740-2	TAG, IDENTIFICATION	213
-	-	-	1	1	-	-	1901094-3	SPACER, FEEDER	198
-	-	-	-	-	2	-	21045-3	RING, RETAIN, EXTERN, 3/16 CRESCENT	172
-	-	-	1	1	1	1	994969-1	MAGNET, RARE EARTH HIGH ENERGY	166
-	-	-	REF	REF	REF	REF	994970-2	COUNTER, MAGNETIC	161
-	-	-	-	-	1	-	240638-1	SPRING, FEED FINGER	163
-	-	-	-	-	1	-	3-23627-7	PIN, RETAIN, GRVD, 3/16 X .854	137
-	-	-	-	-	1	-	2119799-1	HOLDER,FEED FINGER, AF	136
-	-	-	-	REF	REF	-	SEE NOTE 4	MEMORY CHIP, PROGRAMMED	135
-	-	-	1	1	-	-	1633743-1	SERVO FEED LATCH ASM	133
-	-	-	1	1	1	1	1-18028-2	WASHER, FLAT, REG M4	119
-	-	-	-	REF	REF	-	2119944-1	FEED FINGER ASSEMBLY,SF	117
-	-	-	1	1	1	1	455888-4	SPACER, CRIMPER	82
-	-	-	1	1	1	1	22278-8	SPRING, COMPRESSION	77
-	-	-	1	1	1	1	854769-4	HOLDER, INS	74
1	-	-	-	-	-	-	2266111	PRINT, APPLICATOR LOG SHEET	72
-	-	-	1	1	1	1	2119956-1	DOCUMENTATION PACKAGE	71
-	-	-	1	1	1	1	2119791-9	DEPRESSOR, WIRE	70
-	-	-	1	-	-	1	2119740-1	TAG,IDENTIFICATION	67
-	-	-	2	2	2	2	2168078-1	SCREW, DRIVE, RH, RoHS, 2 x .188	66
-	-	-	1	-	1	1	2119793-1	LIMITER, ADJUSTMENT BOLT	63
-	-	-	3	-	3	3	992763-5	SCR, SET, SOC, CONE POINT, M3 x 4.0	62
-	-	-	1	1	1	1	2079383-4	SCR, BHSC, RoHS (M4 X 8)	60
-	-	-	-	-	1	1	5-18022-5	SCR, HEX HD CAP, M4 X 6.0	59
-	-	-	1	1	1	1	21028-2	PIN, SLOTTED SPRING .062 X .250	58
-	-	-	-	-	1	1	1338683-8	FEED PAWL	56
-	-	-	4	4	4	4	2168400-1	SHCS, LOW HEAD, RoHS, M4 X 12	54
-	-	-	2	2	2	2	1-2168083-0	SCR, SKT HD CAP, RoHS, M4 X 10	53
-	-	-	1	1	1	1	5018030-1	NUT, HEX, REG, RoHS, M3	52
-	-	-	1	1	1	1	811242-5	BUMPER, HOLD DOWN	51
-	-	-	1	1	1	1	690753-2	SPACER, TONKER	50
-	-	-	-	-	1	2	18023-9	SCR, SKT HD CAP M4 X 6.0	49
-	-	-	-	-	-	1	2119652-1	FEED CAM, PRE FEED	48
-	-	-	-	-	-	1	2119653-1	FEED CAM, POST FEED	47
-	-	-	1	1	1	1	2119656-9	APPLICATOR BASIC ASSEMBLY, SF	46
-	-	-	1	-	1	1	2119370-1	RAM, AMP STYLE, SIDE FEED	44
-	-	-	1	1	1	1	2079383-7	SCR, BHSC, RoHS (M8 X 25)	41
-	-	-	1	-	1	1	2219645-1	DISC, NUMBERED FA WIRE ADJUSTMENT	40
-	-	-	1	-	1	1	2119957-1	APPLICATOR SHIM PACK	39
-	-	-	1	1	1	1	2119644-1	RAM WASHER, PRECISION	38
-	-	-	1	1	1	1	2119085-1	FA HEAD, ATLANTIC STYLE	37
-	-	-	1	-	1	1	2119092-1	BOLT, ADJUSTMENT	35
-	-	-	1	1	1	1	2-1752356-0	SUPPORT, TERMINAL	34
-	-	-	2	2	2	2	2079383-5	SCR, BHSC, RoHS (M4 X 20)	33
-	-	-	1	1	1	1	2161328-1	HEX HEAD, FLANGED, M5 x 8mm LONG	32


THIS DRAWING IS A CONTROLLED DOCUMENT FOR FPD ELECTRONICS CORPORATION IT IS SUBJECT TO DESIGN AND/OR CONSTRUCTION CHANGES AND REVISIONS SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN R.KNPPFR 09-Oct-13 CHR G.BAILEY 09-Oct-13 APVD M.CLIFFORD 09-Oct-13		 TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TO: BRACKETS, UNLESS OTHERWISE SPECIFIED:		NAME Ocean Side Feed Applicator	
		PRODUCT SPEC - APPLICATION SPEC -		SIZE A1	
MATERIAL -		FINISH -		CAGE CODE 00779	
WEIGHT -		DRAWING NO C=2266111		RESTRICTED TO -	
Customer Accessible Production Drawing				SCALE 1:2 SHEET 1 OF 4 REV. A2	

LOC		DIST		REVISONS				
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		-	-	SEE SHEET 1	-	-	-	


FEED TYPE MECHANICAL

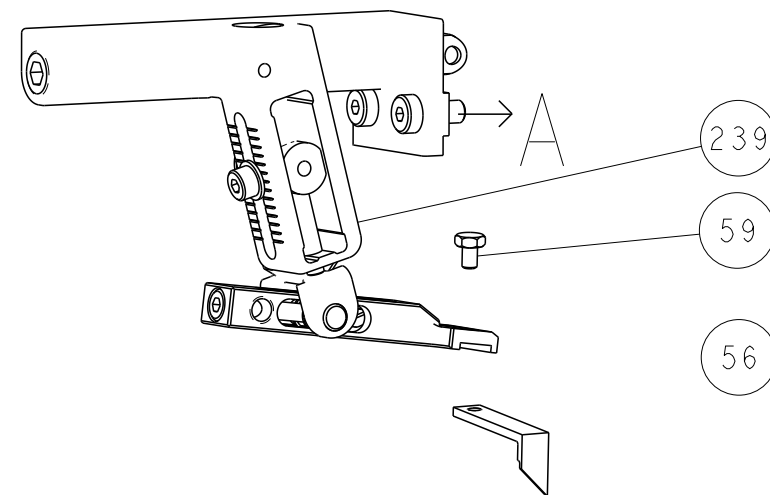


PNEUMATIC

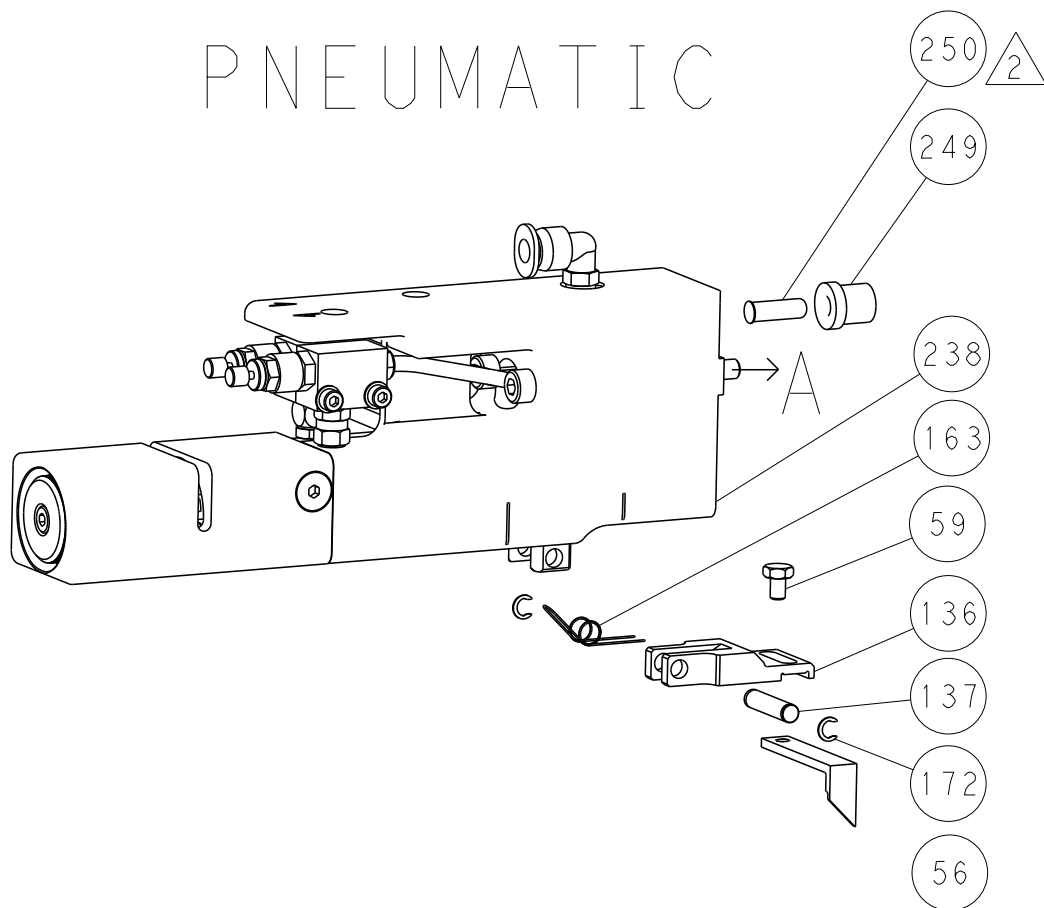




SERVO LATCH PLATE

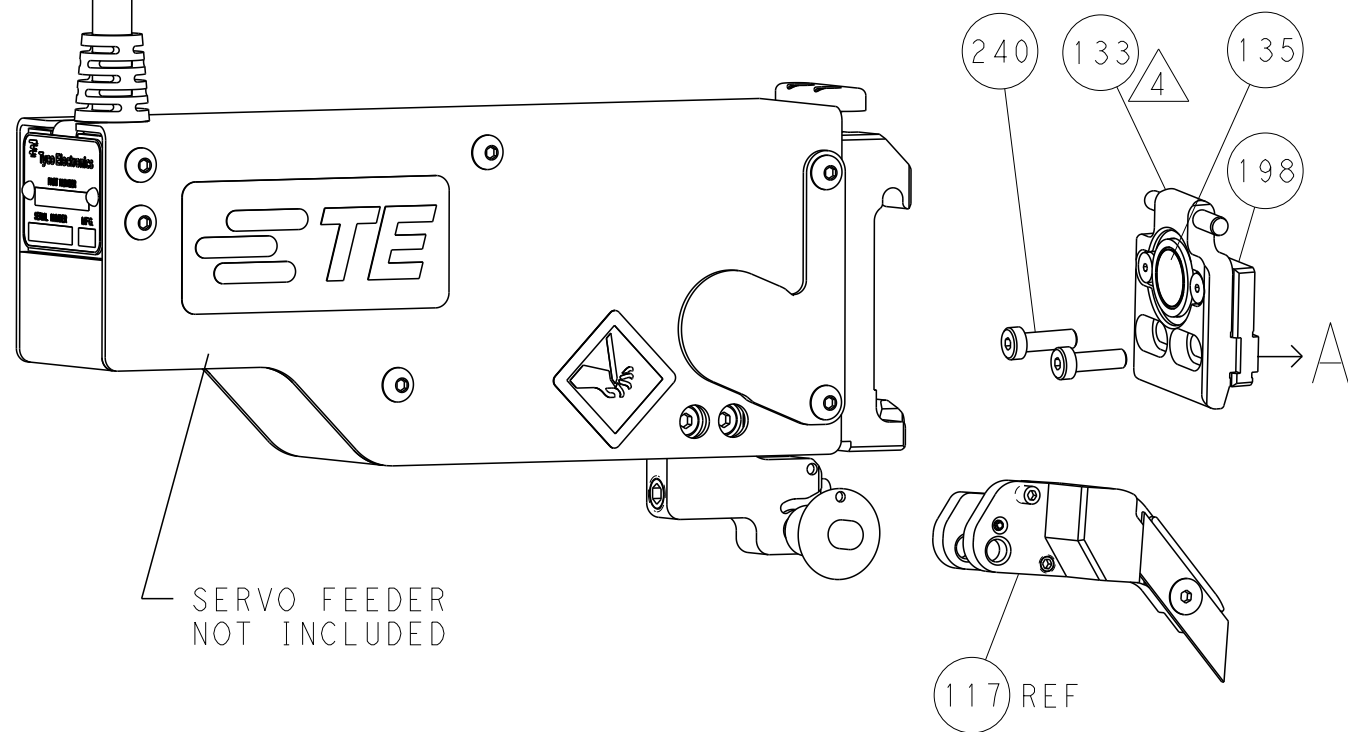



CAM POSITIONS

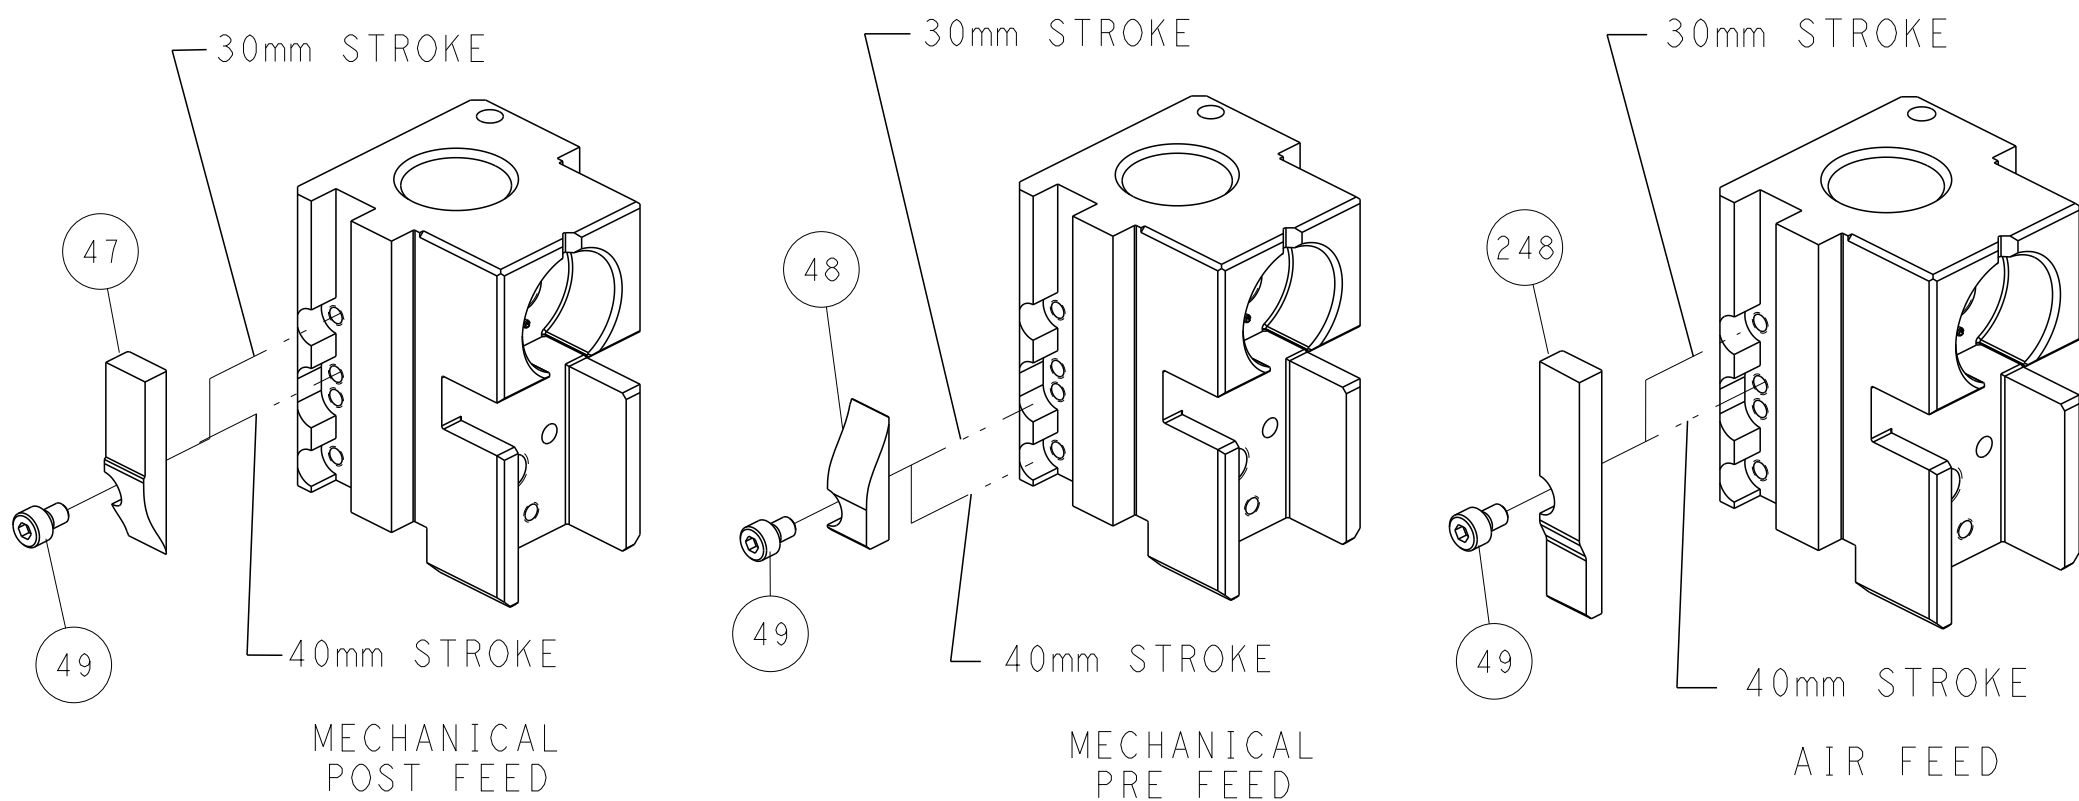

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

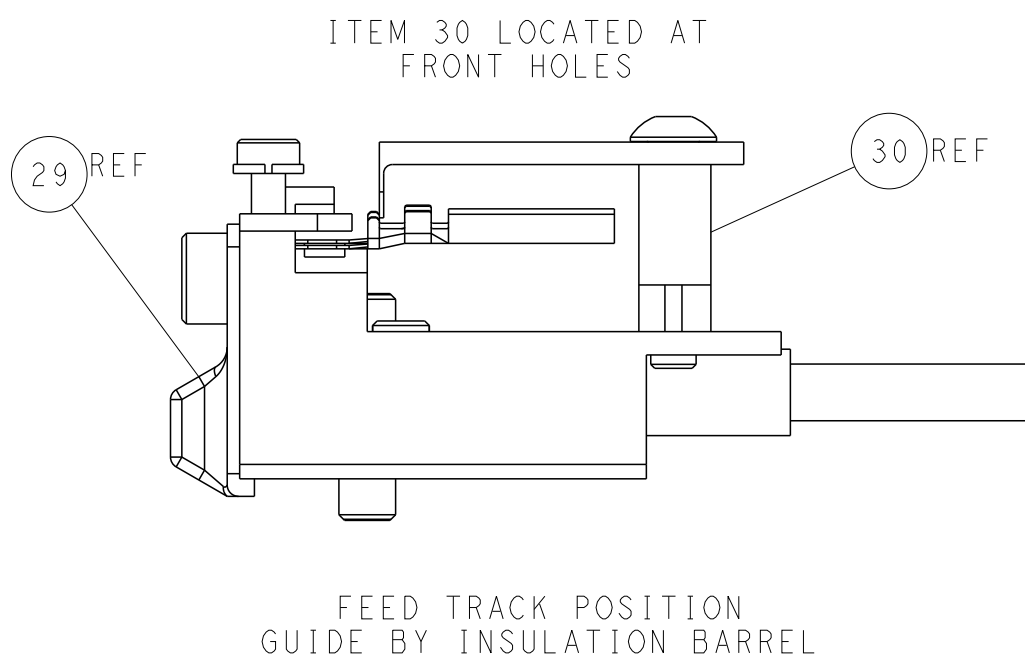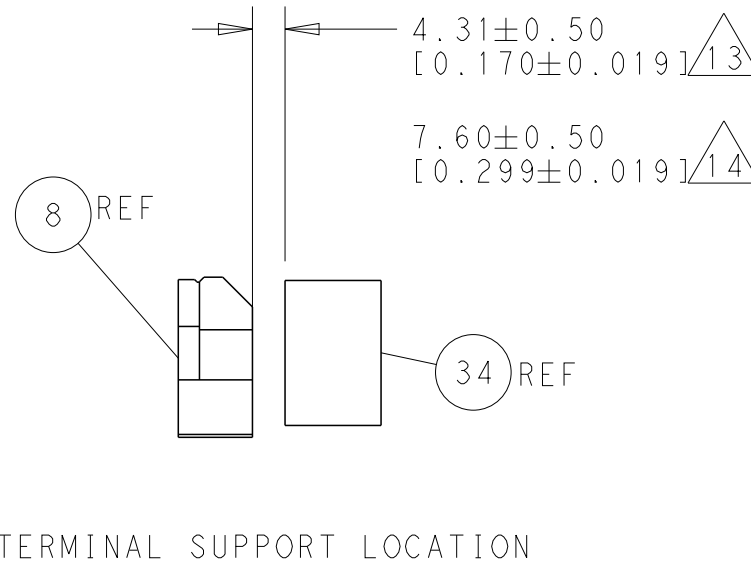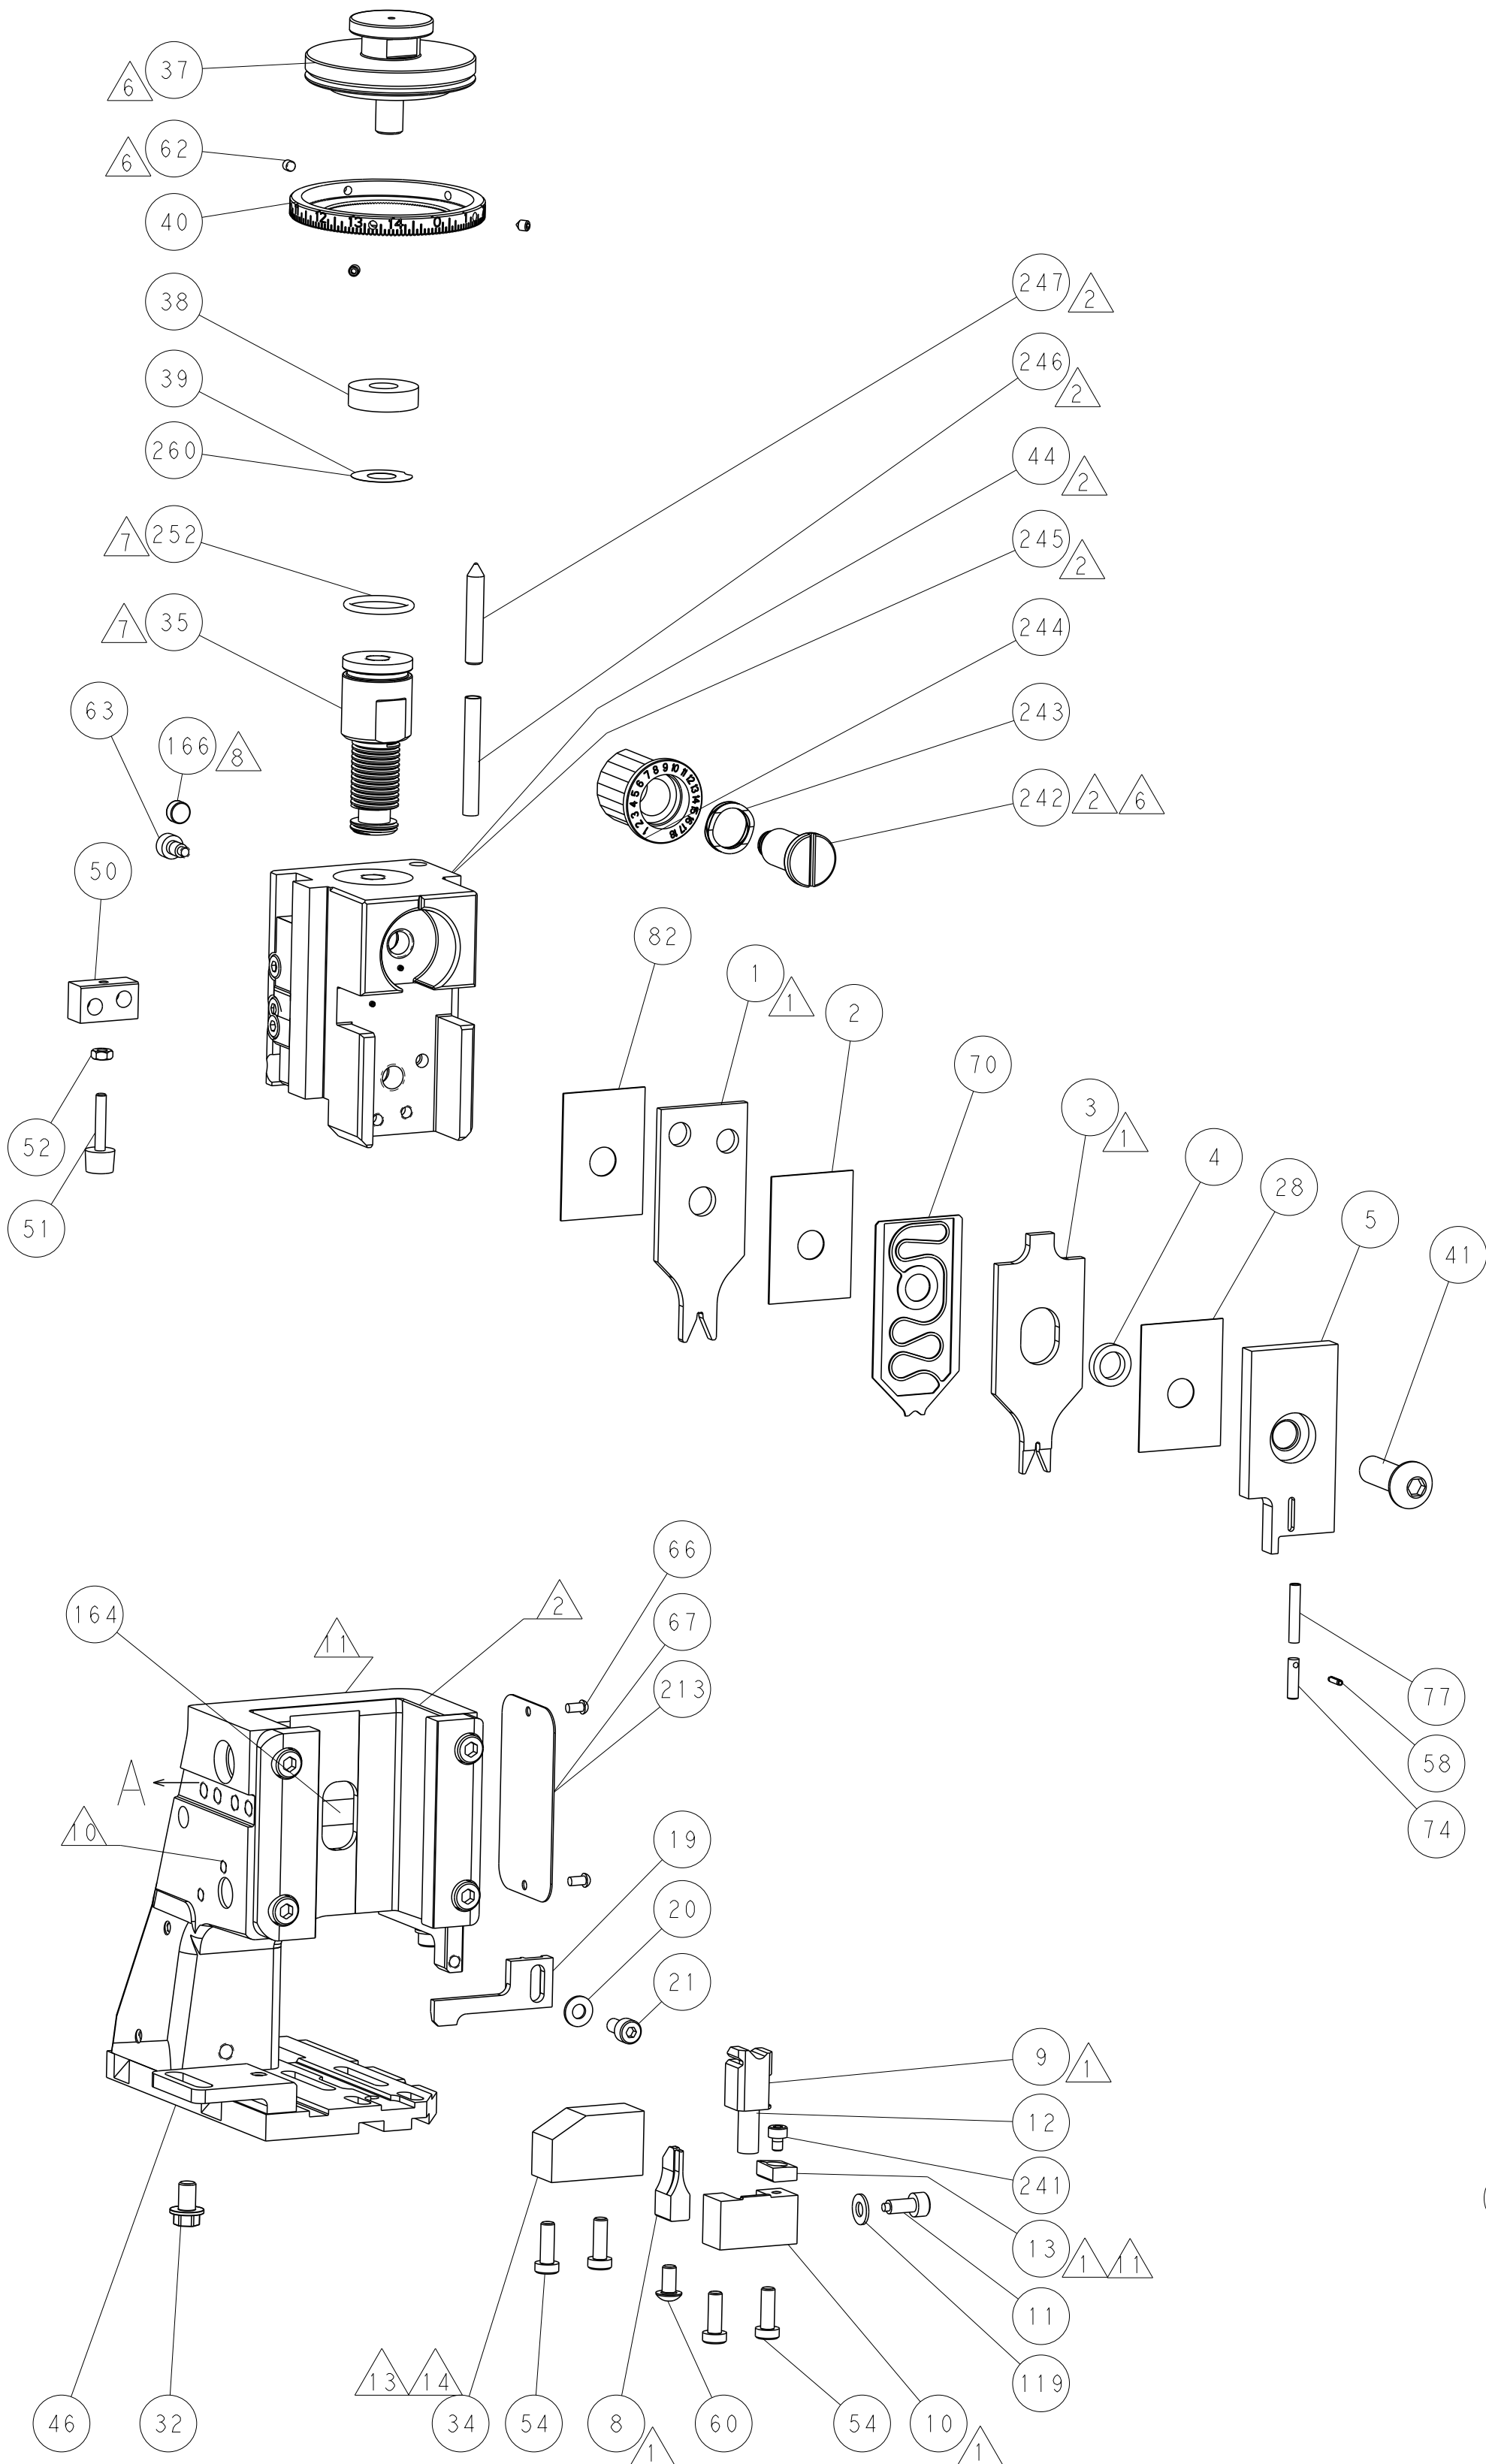



THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS SUBJECT TO CHANGE WITHOUT NOTICE.				DWN	R. KNEPPER	09-Oct-13	 TE Connectivity			
				CHK	G. BAILEY	09-Oct-13	Harrisburg, PA 17105-3608			
				APVD	M. CLIFFORD	09-Oct-13	NAME Ocean Side Feed Applicator -			
				PRODUCT SPEC						
				APPLICATION SPEC						
DIMENSIONS:				SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
mm				A1	00779	C=2266111	-			
TOLERANCES UNLESS OTHERWISE SPECIFIED:				Customer Accessible Production Drawing						
0 PLC ±.5				SCALE		1:2				
1 PLC ±0.5				SHEET		2 of 4				
2 PLC ±0.13				REV		A2				
3 PLC ±0.013										
4 PLC ±0.0001										
ANGLES FINISH										
MATERIAL										

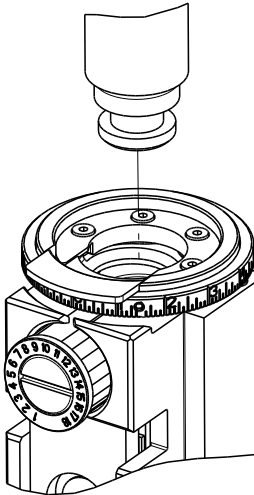8		7	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT 20		20	
BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.			
PACIFIC VERSION TERMINATOR INTERFACE ADAPTER	PART NUMBER	REVISION	DESCRIPTION
	2-2266111-1	A	FINE CRIMP HEIGHT ADJUST
	2-2266111-2	A	FINE CRIMP HEIGHT ADJUST
	2-2266111-5	A	FINE CRIMP HEIGHT ADJUST
	2-2266111-7	A	FINE CRIMP HEIGHT ADJUST
	7-2266111-7	A	CRIMP TOOLING KIT
	7-2266111-8	A	APPLICATOR CONVERSION KIT

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	1.88 mm [.074]	F
INSUL	1.32 mm [.052]	O
APPLICATOR INSTRUCTIONS 408-10389		


APPLICATOR CONVERSION KITS	
PART NUMBER	INSULATION DIAMETER RANGE
7-2266110-8	Ø1.60-2.39mm [.063-.094]
7-2266111-8	Ø1.27-1.91mm [.050-.075]

TERMINAL DATA: DEUTSCH TERMINAL DEUTSCH CRIMP SPECIFICATION			
TERMINAL NAME: STAMPED CONTACT PIN SIZE 16			
WIRE STRIP LENGTH 3.81-5.09 mm [.150-.200 IN]		INSULATION DIAMETER RANGE Ø1.27-1.91 mm [.050-.075 IN]	
TERMINAL APPLICATION SPECIFICATION	0425-059-0000 Rev L	-	-
TERMINALS APPLIED	-	-	-
TE TERMINAL	DEUTSCH TERMINAL	TE TERMINAL	DEUTSCH TERMINAL
286503-4	1060-16-0622	286503-5	1060-16-0644
1-286503-3	1060-16-0677	286503-6	1060-16-0688

WIRE SIZE		CRIMP HEIGHT mm [INCH]		CRIMP HEIGHT REFERENCE SETTING
16 AWG		1.27+0.03/-0.05 [.050+/.001/- .002]		5.7
1.00mm2		1.27+0.03/-0.05 [.050+/.001/- .002]		5.6
18 AWG		1.24+0.03/-0.05 [.049+/.001/- .002]		5.9
0.75mm2		1.22+0.03/-0.05 [.048+/.001/- .002]		6.1
20 AWG		1.22+0.03/-0.05 [.048+/.001/- .002]		6.0
0.50mm2		1.14+0.03/-0.05 [.045+/.001/- .002]		7.0



- RECOMMENDED SPARE PARTS
- GREASE BEARING SURFACES LIGHTLY
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2266111-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2266111-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2266111-5
5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
6. APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 62 & 242.
7. GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 152.
8. MAGNET MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.
9. CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
10. SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
11. TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
12. DIMENSION 1.00±0.50 [0.039±0.019] APPLIES TO PIN TERMINALS 1060-06-06XX.
13. DIMENSION 7.60±0.50 [0.299±0.019] APPLIES TO SOCKET TERMINALS 1062-06-06XX.
14. SEE APPROPRIATE APPLICATOR LOG SHEETS FOR APPLIED TERMINALS, WIRE RANGE AND MEMORY CHIP.

TERMINAL DATA: DEUTSCH TERMINAL DEUTSCH CRIMP SPECIFICATION			
TERMINAL NAME: STAMPED CONTACT SOCKET SIZE 16			
WIRE STRIP LENGTH 3.81-5.09 mm [.150-.200 IN]		INSULATION DIAMETER RANGE Ø1.27-1.91 mm [.050-.075 IN]	
TERMINAL APPLICATION SPECIFICATION	0425-059-0000 Rev L	-	-
TERMINALS APPLIED	-	-	-
TE TERMINAL	DEUTSCH TERMINAL	TE TERMINAL	DEUTSCH TERMINAL
286504-4	1062-16-0622	286504-5	1062-16-0644
1-286504-4	1062-16-0677	286504-6	1062-16-0688


*WARNING
ON INSTALLATION, SET WIRE DISC, ITEM 40 TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

-	-	1	1	1	1	2119782-1	FINE ADJUST HEAD ASM, PACIFIC STYLE	251
-	-	-	-	1	-	2119640-1	PUSH ROD, AIR FEED	250
-	-	-	-	1	-	2079988-1	BUSHING, LCH5-12, MISUMI	249
-	-	1	1	1	1	1-22279-3	SPRING, COMPRESSION	246
-	-	1	1	1	1	2119082-9	CAM, SNAIL, INSULATION ADJUSTMENT	244
-78	-77	-27	-25	-22	-21	PART NO	DESCRIPTION	ITEM NO

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

SET UP GAUGE 2119599-1	LOC A	DIST 66	REVISIONS				
P	LTR	DESCRIPTION			DATE	OWN	APVD
-	-	SEE SHEET 1			-	-	-

6	-	-	1	1	1	1	2079764-1	WASHER, WAVE SPRING, CREST-TO-CREST	243
	-	-	1	1	1	1	2119083-1	RETAINER, INSULATION DIAL	242
	-	-	1	1	1	1	7-18023-7	SCR, SKT HD CAP M3 X 4.0	241
	-	-	-	2	-	-	2168400-6	SHCS, LOW HEAD, RoHS, M5 X 16	240
	-	-	-	-	-	1	2119580-1	MECHANICAL FEED ASSEMBLY	239
	-	-	-	-	1	-	2063440-1	AIR FEED MODULE	238
	-	-	-	1	-	-	2119740-2	TAG, IDENTIFICATION	213
	-	-	-	1	-	-	1901094-3	SPACER, FEEDER	198
	-	-	-	-	2	-	21045-3	RING, RETAIN, EXTERN, 3/16 CRESCENT	172
	-	-	1	1	1	1	994969-1	MAGNET, RARE EARTH HIGH ENERGY	166
	-	-	REF	REF	REF	REF	994970-2	COUNTER, MAGNETIC	164
	-	-	-	-	1	-	240638-1	SPRING, FEED FINGER	163
	-	-	1	1	1	1	8-21084-1	O-RING, .801 ID, .070 DIA. MAT.	152
	-	-	-	-	1	-	2119641-2	FEED CAM, AIR FEED	151
	-	-	1	1	1	1	2119798-2	DETENT PIN	145
	-	-	1	1	1	1	2079383-8	SCR, BHSC, RoHS (M4 X 16)	144
	-	-	4	4	4	4	2168400-5	SHCS, LOW HEAD, RoHS, M4 X 20	143
	-	-	-	-	-	1	2119653-2	FEED CAM, POST FEED	142
	-	-	1	1	1	1	1-2119656-0	APPLICATOR BASIC ASSEMBLY, SF	141
	-	-	1	1	1	1	2119650-1	RAM, ASIAN STYLE, SIDE FEED	140
	-	-	1	1	1	1	2119092-2	BOLT, ADJUSTMENT	139
	-	-	-	-	1	-	3-23627-7	PIN, RETAIN, GRVD, 3/16 X .854	137
	-	-	-	-	1	-	2119799-1	HOLDER, FEED FINGER, AF	136
	-	-	-	REF	-	-	SEE NOTE 4	MEMORY CHIP, PROGRAMMED	135
	-	-	-	1	-	-	1633743-1	SERVO FEED LATCH ASM	133
	-	-	1	1	1	1	1-18028-2	WASHER, FLAT, REG M4	119
	-	-	-	REF	-	-	2119944-1	FEED FINGER ASSEMBLY, SF	117
	-	-	1	1	1	1	455888-4	SPACER, CRIMPER	82
	-	-	1	1	1	1	22278-8	SPRING, COMPRESSION	77
	-	-	1	1	1	1	854769-4	HOLDER, INS	74
1	-	-	-	-	-	-	2266111	PRINT, APPLICATOR LOG SHEET	72
	-	-	1	1	1	1	2119956-1	DOCUMENTATION PACKAGE	71
	-	-	1	1	1	1	2119791-9	DEPRESSOR, WIRE	70
	-	-	1	-	1	1	2119740-1	TAG, IDENTIFICATION	67
	-	-	2	2	2	2	2168078-1	SCREW, DRIVE, RH, RoHS, 2 x .188	66
	-	-	1	1	1	1	2119793-1	LIMITER, ADJUSTMENT BOLT	63
6	-	-	3	3	3	3	992763-5	SCR, SET, SOC, CONE POINT, M3 x 4.0	62
	-	-	-	-	1	1	5-18022-5	SCR, HEX HD CAP, M4 X 6.0	59
	-	-	1	1	1	1	21028-2	PIN, SLOTTED SPRING .062 X .250	58
	-	-	-	-	1	1	1338683-8	FEED PAWL	56
	-	-	2	2	2	2	1-2168083-0	SCR, SKT HD CAP, RoHS, M4 X 10	53
	-	-	1	1	1	1	5018030-1	NUT, HEX, REG, RoHS, M3	52
	-	-	1	1	1	1	811242-5	BUMPER, HOLD DOWN	51
	-	-	1	1	1	1	690753-2	SPACER, TONKER	50
	-	-	-	-	1	2	18023-9	SCR, SKT HD CAP M4 X 6.0	49
	-	-	-	-	-	1	2119652-1	FEED CAM, PRE FEED	48
	-	-	1	1	1	1	2079383-7	SCR, BHSC, RoHS (M8 X 25)	41
	-	-	1	1	1	1	2119645-1	DISC, NUMBERED FA WIRE ADJUSTMENT	40
	-	-	1	1	1	1	2119957-1	APPLICATOR SHIM PACK	39
	-	-	1	1	1	1	2119644-1	RAM WASHER, PRECISION	38
12, 13	-	-	1	1	1	1	2-1752356-0	SUPPORT, TERMINAL	34
	-	-	2	2	2	2	2079383-5	SCR, BHSC, RoHS (M4 X 20)	33
	-	-	1	1	1	1	2161328-1	HEX HEAD, FLANGED, M5 x 8mm LONG	32
	-	-	1	1	1	1	1-1320908-0	SPACER, STRIP GUIDE	30
	-	-	1	1	1	1	2119959-1	ASSEMBLY, STRIP GUIDE	29
	-	-	1	1	1	1	455888-3	SPACER, CRIMPER	28
	-	-	1	1	1	1	1320928-2	STRIP GUIDE	24
	-	-	1	1	1	1	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	21
	-	-	1	1	1	1	1-18028-2	WASHER, FLAT, REG M4	20
	-	-	1	1	1	1	2119533-1	STRIPPER, SIDE FEED	19
1	-	-	1	1	1	1	2119806-1	INSERT, SHEAR	13
	-	-	1	1	1	1	3-22280-3	SPRING, COMPRESSION	12
	-	-	1	1	1	1	1-356885-4	STOP, SHEAR	11
1	-	-	1	1	1	1	2119805-1	SHEAR HOLDER, FRONT	10
1	-	-	1	1	1	1	1803095-1	FLOATING SHEAR, FRONT	9
1	1	1	1	1	1	1	1-1803054-8	ANVIL, COMBINATION	8
	-	-	-	-	-	-	-	-	7
	-	-	-	-	-	-	-	-	6
	-	-	1	1	1	1	2119780-9	DEPRESSOR, SHEAR	5
	-	-	1	1	1	1	238011-9	BLOCK, CRIMPER SPACER	4
1	1	1	1	1	1	1	1803019-8	CRIMPER, INSULATION O	3
	1	1	1	1	1	1	455888-4	SPACER, CRIMPER	2
1	-	1	1	1	1	1	4-1633713-1	CRIMPER, WIRE PREMIUM	1

(1) DRAWING IS A CONTROL DOCUMENT. NO ALTERATIONS OR MODIFICATIONS TO THIS DRAWING ARE PERMITTED WITHOUT THE WRITTEN AUTHORIZATION OF THE DESIGN ENGINEER. FOR THE LATEST EDITION, CONTACT THE CUSTOMER'S ORGANIZATION.				DWN R. KNEPPER 09-Oct-13		 TE Connectivity Harrisburg, PA 17105-3608	
				CHK G. BAILEY 09-Oct-13			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. CLIFFORD 09-Oct-13		NAME	
mm		0 PLC ±.5 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001		PRODUCT SPEC		Ocean Side Feed Applicator	
		FINISH		APPLICATION SPEC		SIZE	
MATERIAL		FINISH		WEIGHT		CASE CODE	
-		-		-		DRAWING NO	
-		-		-		A1 00779 ©=2266111	
Customer Accessible Production Drawing				SCALE			
				1:2			
				SHEET		3 of 4	
				REV		A2	

SHEETS 1 & 2 ARE NOT REQUIRED FOR PACIFIC VERSION

LOC		DIST		REVISIONS					
A		66		P	LTR	DESCRIPTION	DATE	DWN	APVD
				-		SEE SHEET 1	-	-	-

D

C

B

A


D

C


B

A


FEED TYPE MECHANICAL

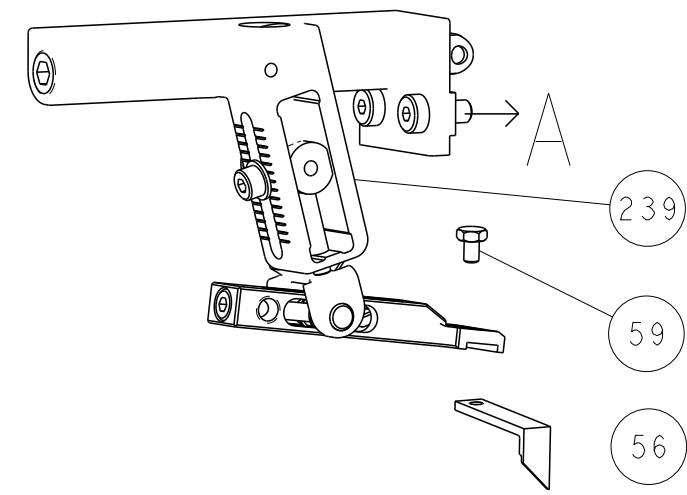




PNEUMATIC

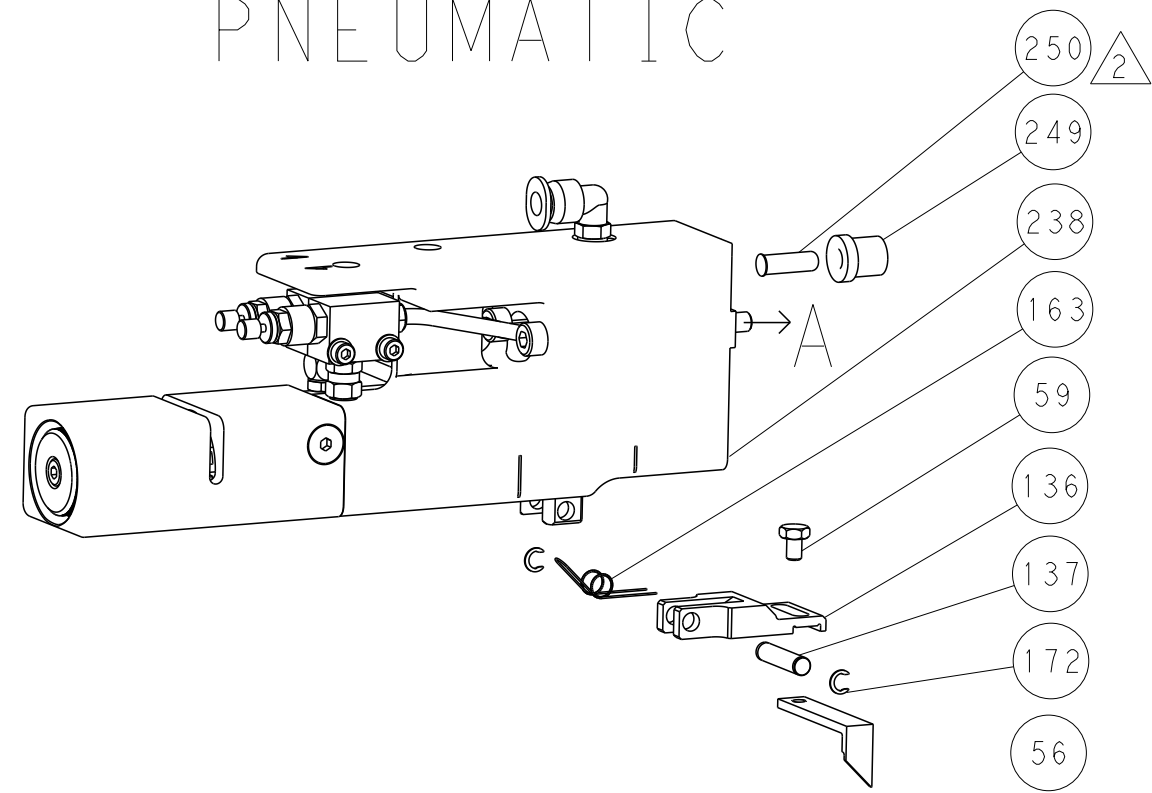


SERVO LATCH PLATE

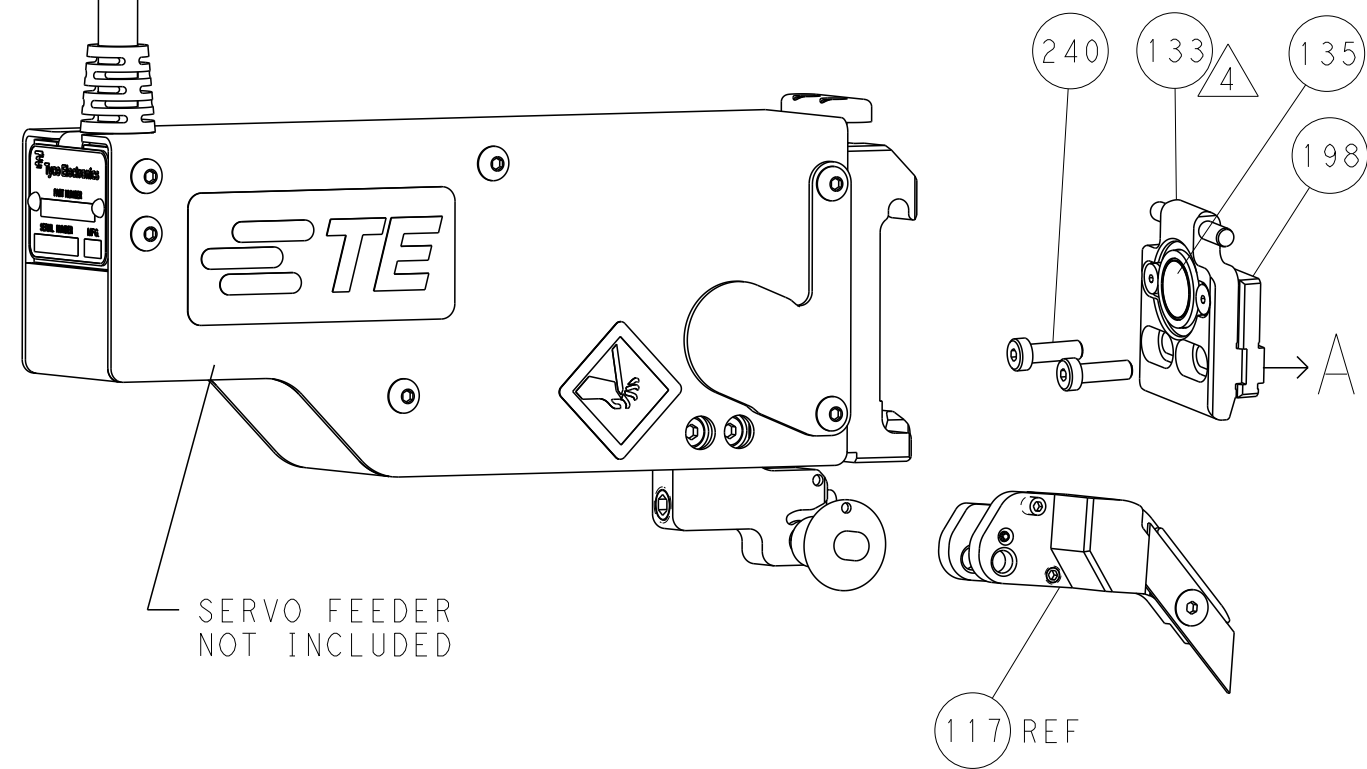

CAM POSITIONS

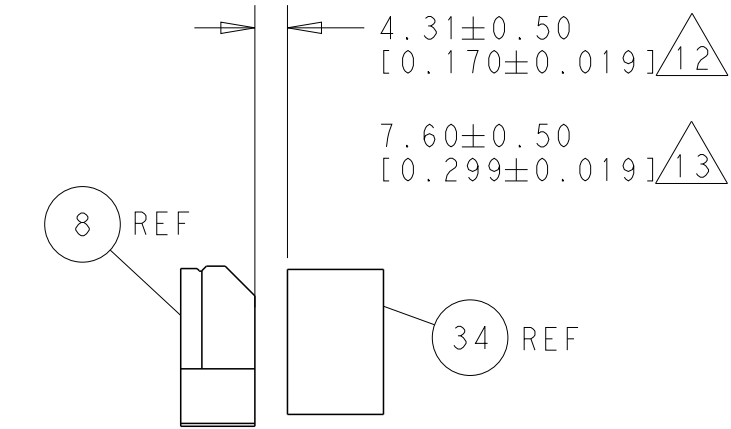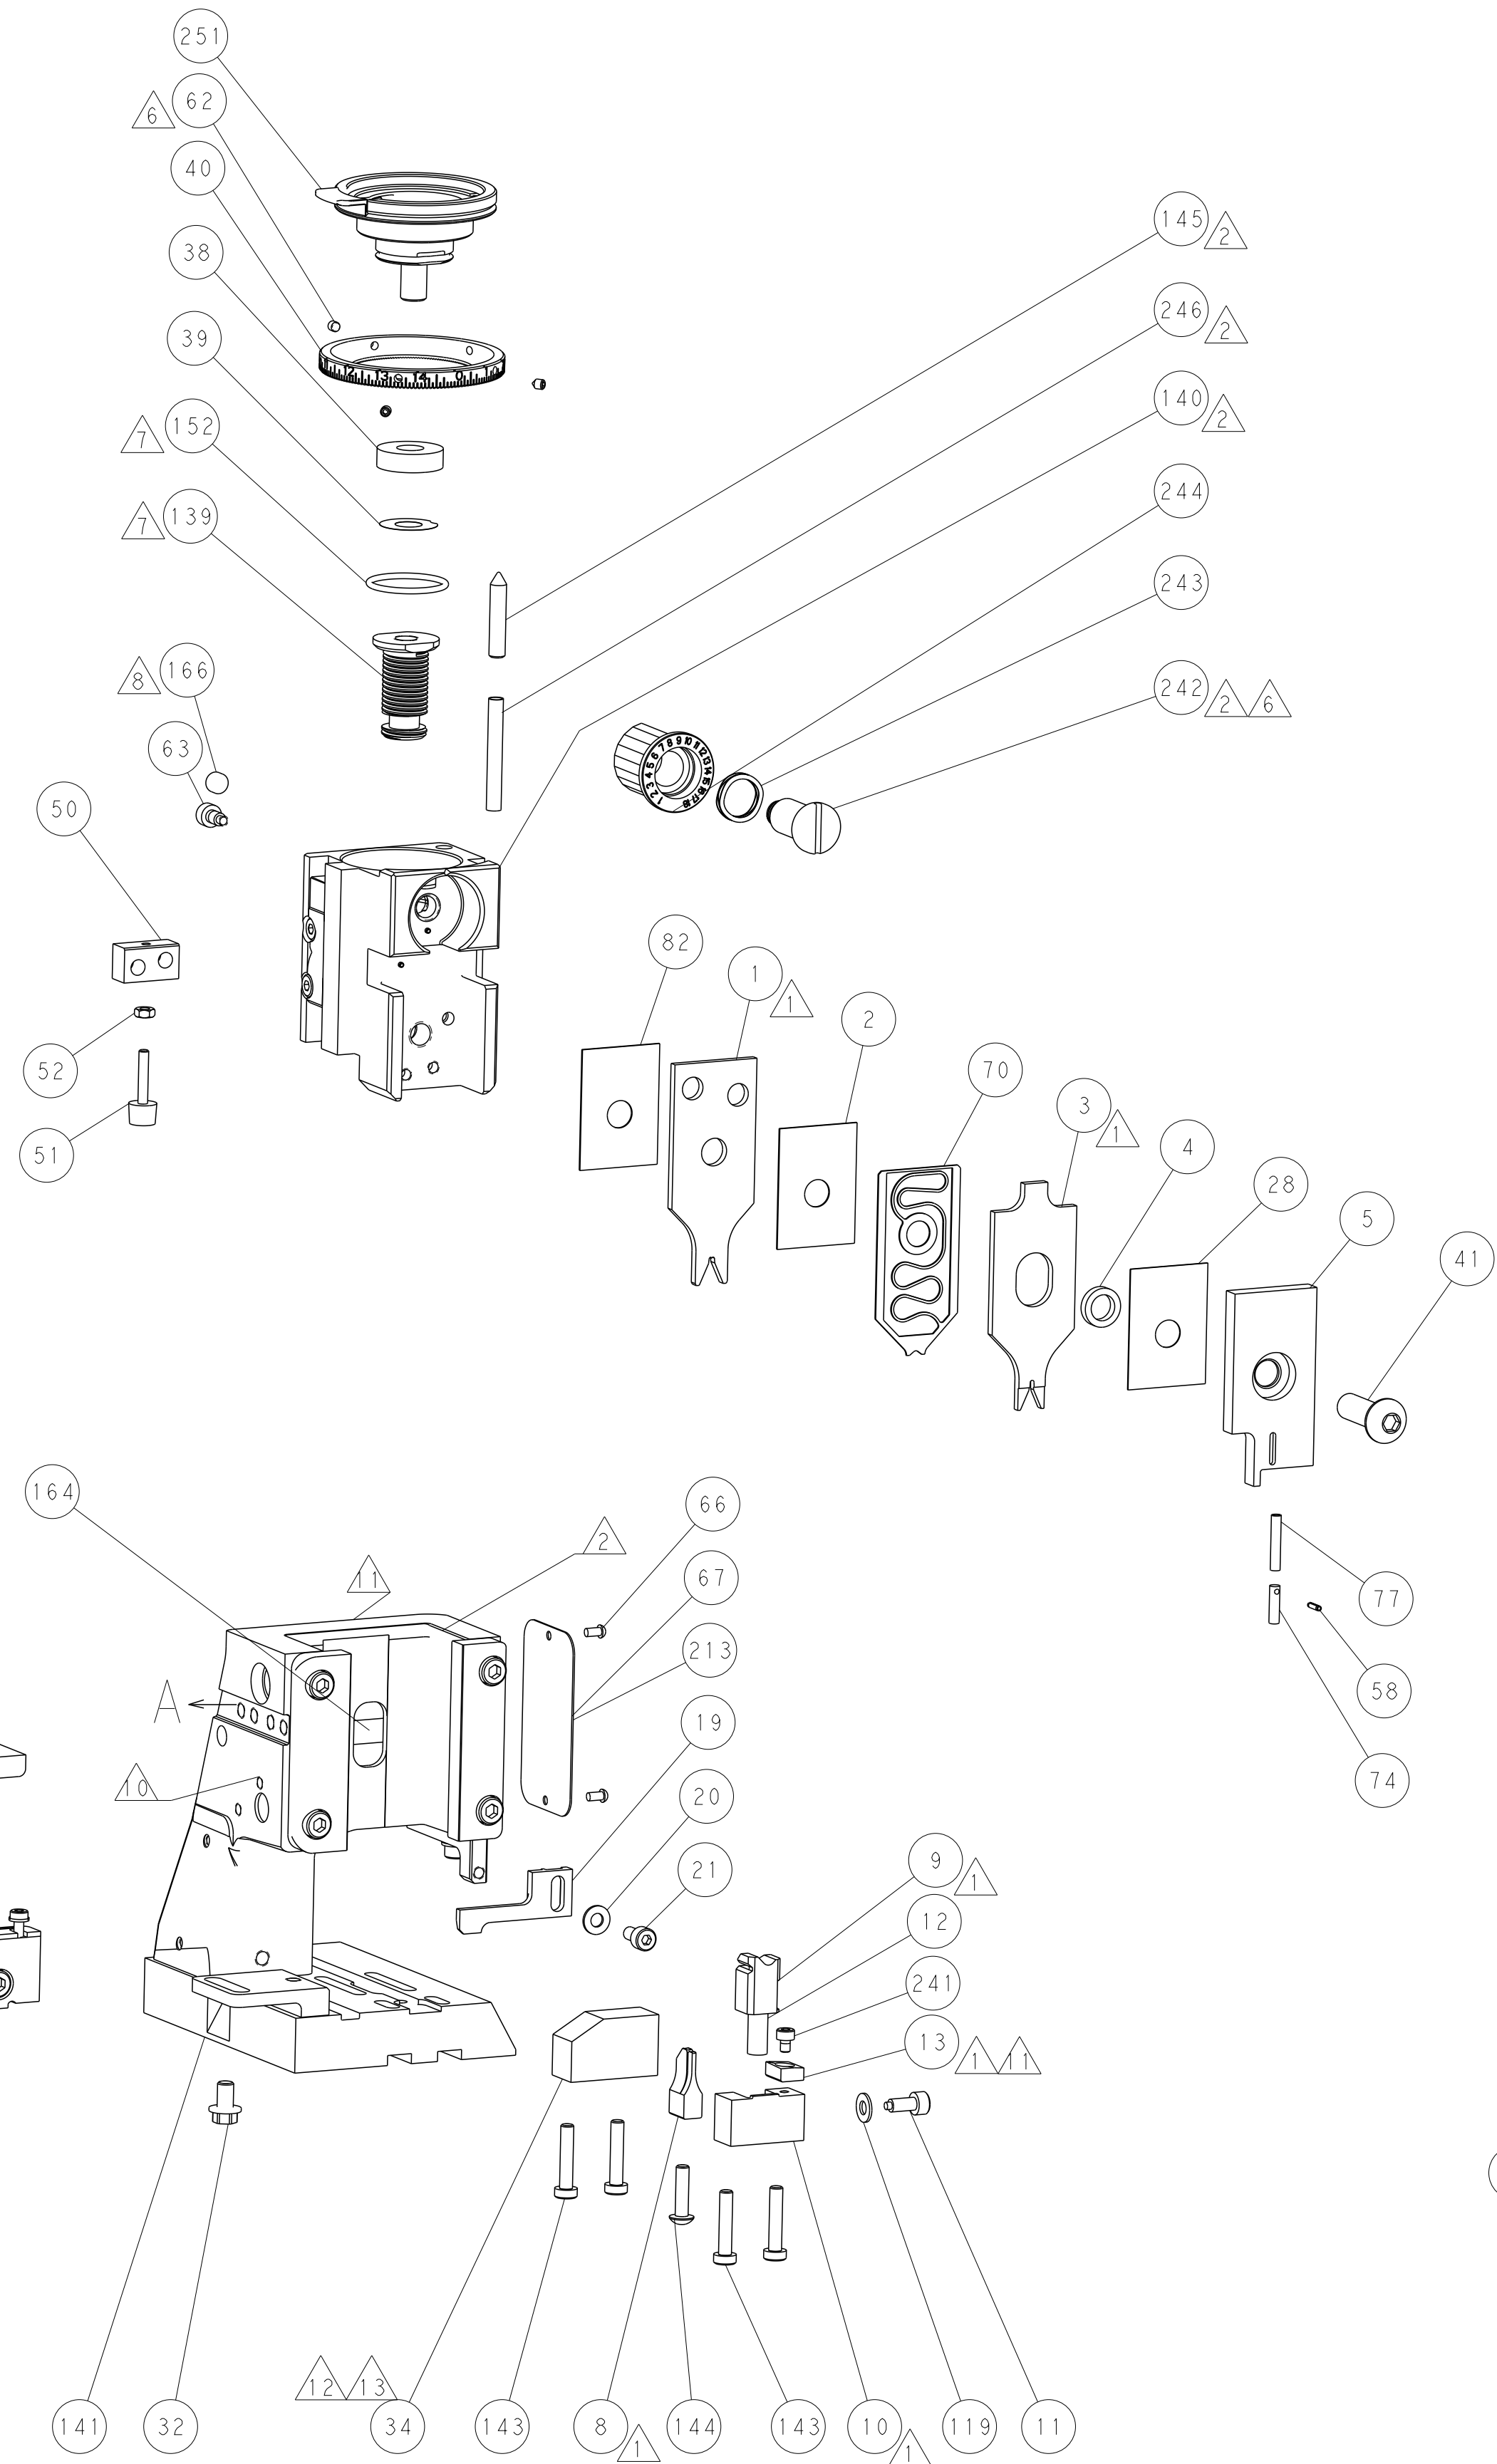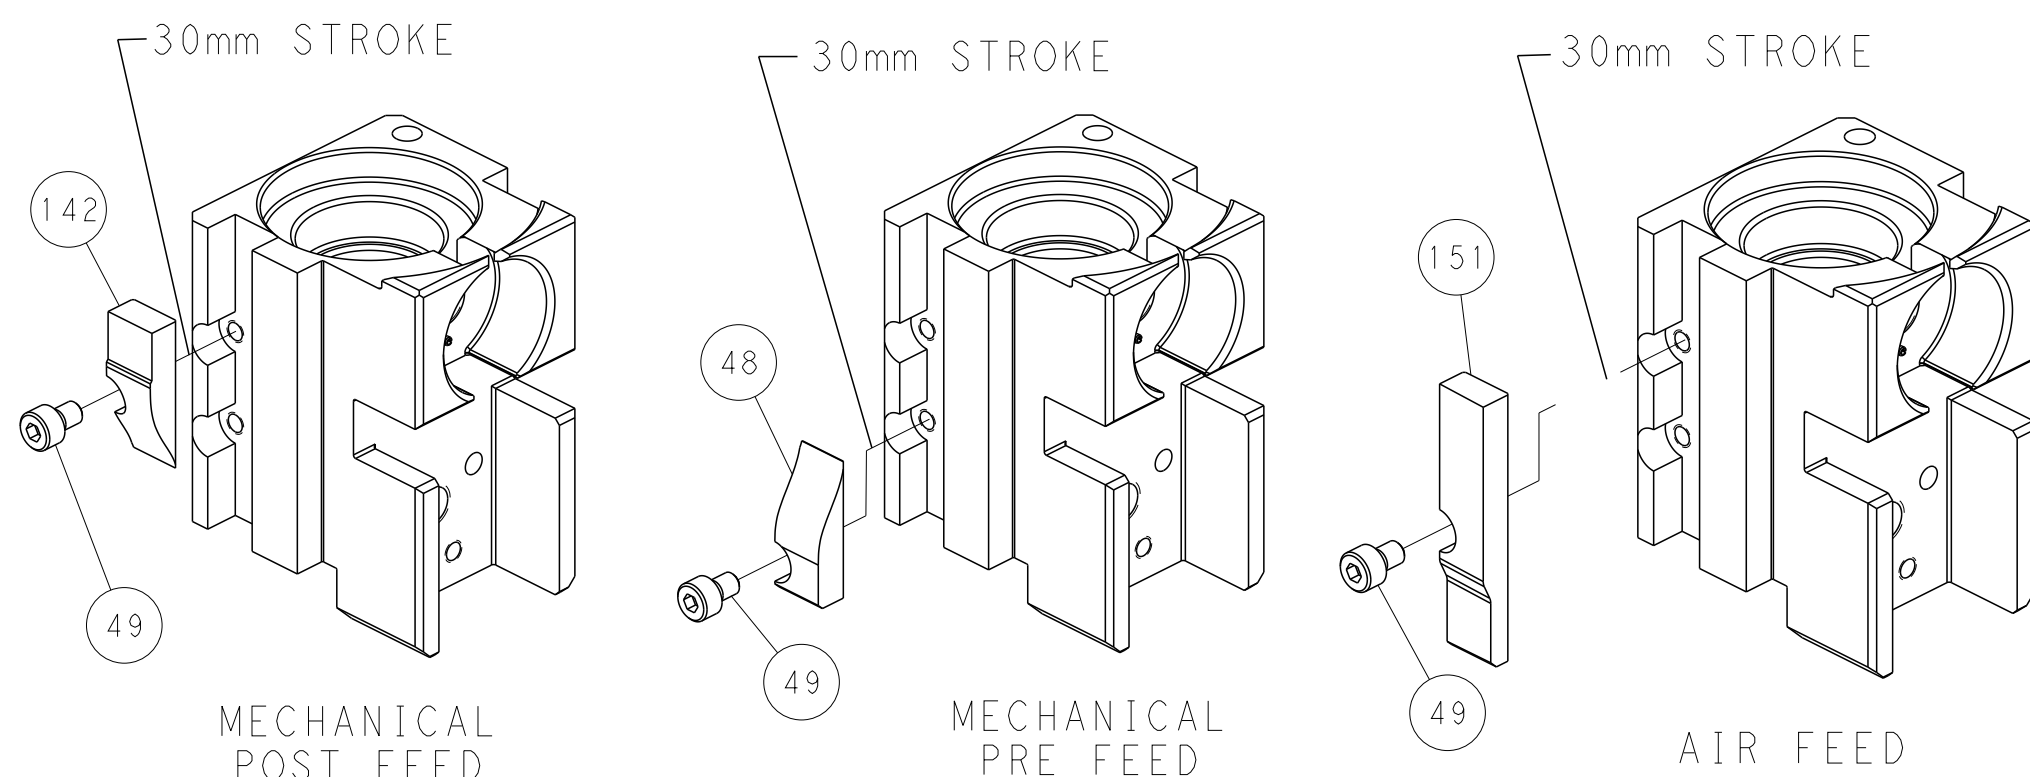

TERMINAL SUPPORT LOCATION

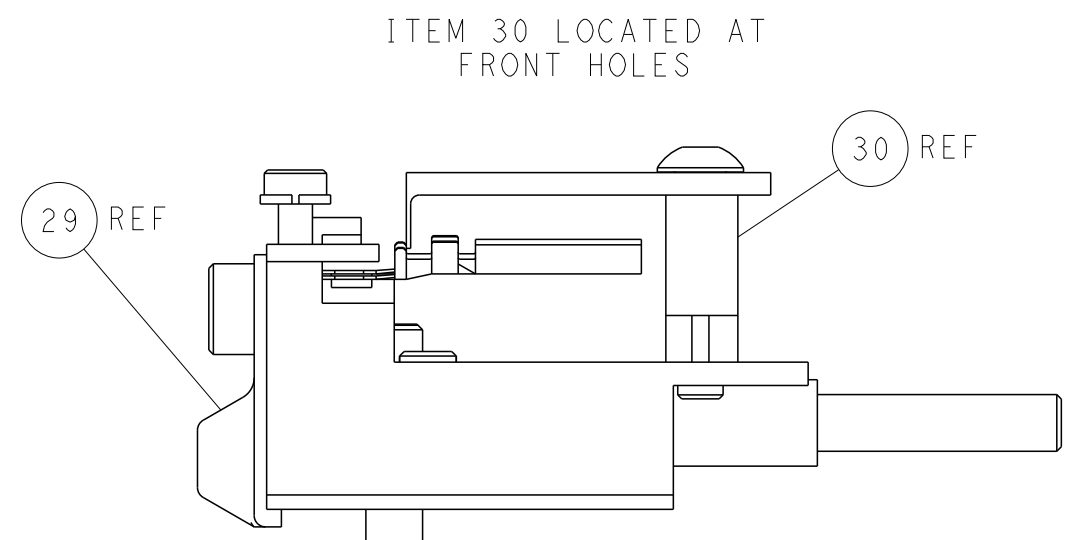

FEED TRACK POSITION
GUIDE BY INSULATION BARREL

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE USER SHALL BE RESPONSIBLE FOR THE LATEST VERSION.		DWN R. KNEPPER 09-Oct-13		CHK G. BAILEY 09-Oct-13		APVD M. CLIFFORD 09-Oct-13		NAME Ocean Side Feed Applicator	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO	
0 PLC ±0.5		1 PLC ±0.13		2 PLC ±0.13		3 PLC ±0.013		4 PLC ±0.001	
MATERIAL		FINISH		WEIGHT		Customer Accessible Production Drawing		SCALE 1:2	
								SHEET 4 OF 4	
								REV A2	

SHEETS 1 & 2 ARE NOT REQUIRED FOR PACIFIC VERSION

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9