

C. Westby 12-6-91
APPROVED/DATE

2
REV

SAFETY ORGANIZATION(S)

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET.

UL RECOGNIZED
CSA 22-2, NO. 0, 0, 4, 8
VDE APPROVED
VDE 565-3
SEMKO APPROVED
SEN 432901

OPERATING SPECIFICATIONS

LINE VOLTAGE/CURRENT:
3 AMP., 120/250 VAC
3 AMP./40°C, 250 VAC
50-60Hz

LINE FREQUENCY

MAX. LEAKAGE CURRENT, EACH
LINE TO GROUND
.20mA at 120V 60 Hz
.33 mA at 250V 50 Hz

OPERATING AMBIENT TEMP. RANGE

-10°C TO +40°C @ RATED CURRENT, I_L
IN AN AMBIENT, T_a , HIGHER THAN 40°C, THE MAXIMUM OPERATING
CURRENT, I_o , IS AS FOLLOWS:

$$I_o = I_r \sqrt{\frac{85-T_a}{45}}$$

RELIABILITY SPECIFICATIONS

STORAGE TEMPERATURE,
HUMIDITY,
CURRENT OVERLOAD TEST,
6 TIMES RATED CURRENT FOR 8 SECONDS



TEST SPECIFICATIONS

INDUCTANCE,
CAPACITANCE, (MEASURED @ 1 KHz, 0.25 VAC MAX., 25°C ±1°C)
LINE TO GROUND,
LINE TO LINE,
DISCHARGE RESISTOR,
LINE/GROUND AND LINE/LINE
INSULATION RESISTANCE
(W/O DISCHARGE RESISTOR)


RECOMMENDED RECEIVING INSPECTION HIPOUT.

LINES TO GROUND,
LINE TO LINE,
2250 VDC FOR 1 MINUTE
1450 VDC FOR 1 MINUTE

FILTER APPROVAL,
THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING
TO TEST THE UNIT IN YOUR EQUIPMENT.

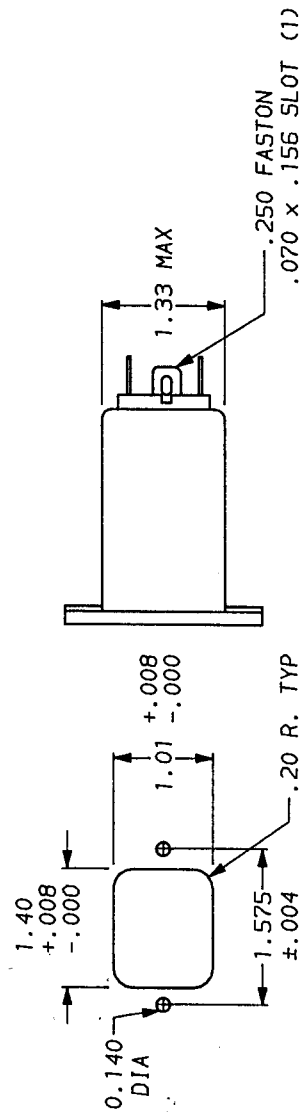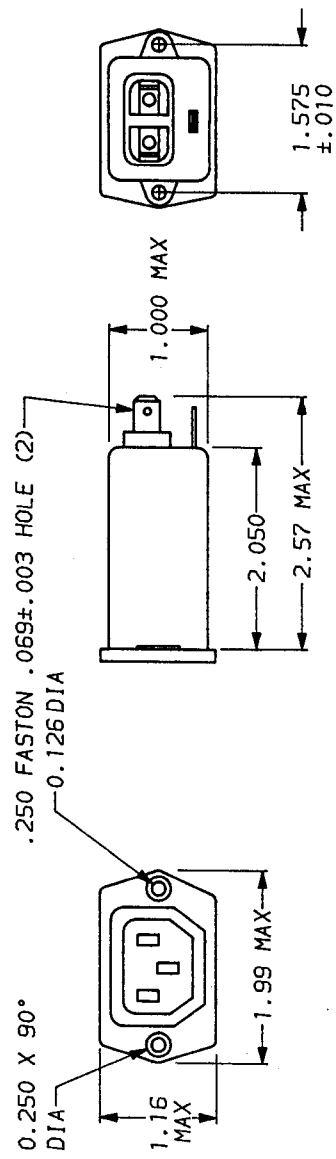

THIS FILTER LINE AND LOAD ARE REVERSED, THE SOCKET IS LOAD.

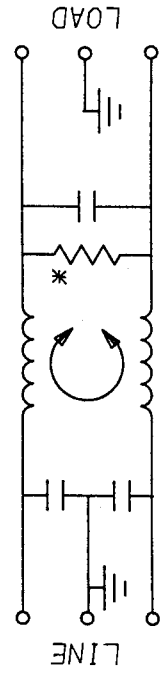

50a - 50a (MINIMUM) INSERTION LOSS											
FREQUENCY MHz	.01	.05	.1	.15	.5	1	3	5	10	30	
COMMON dB	—	—	10	15	19	30	36	44	49	50	47
DIFF. dB	—	—	—	1	2	11	14	25	36	44	40

This document is proprietary to CORCOM INC. and is not
to be reproduced nor used for manufacturing purposes
except on CORCOM's order or prior written consent.



ACCESSORY OUTLET FILTER

DATE: 11-5-90
SCALE: NTS
REV. NO.: 3EBF1.02
CFW
CFW

*RESISTOR ADDED TO PRODUCT BUILT AFTER 3-30-92 (9212)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9