


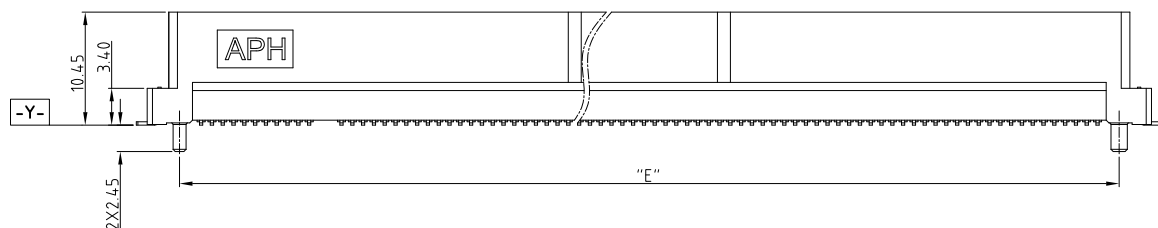
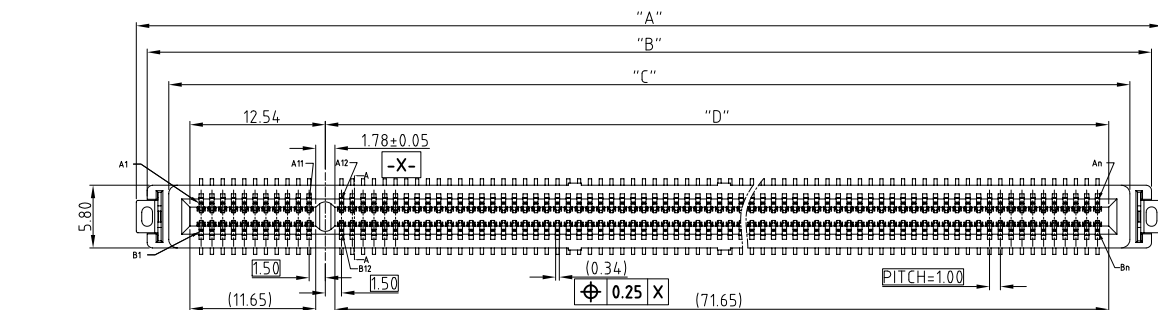


REVISIONS

SYM	ECN	DESCRIPTION	DATE	APPROVE
1	N/A	First Proposal	Jan.11,2018	
2	N/A	Update PN	May.11,2018	

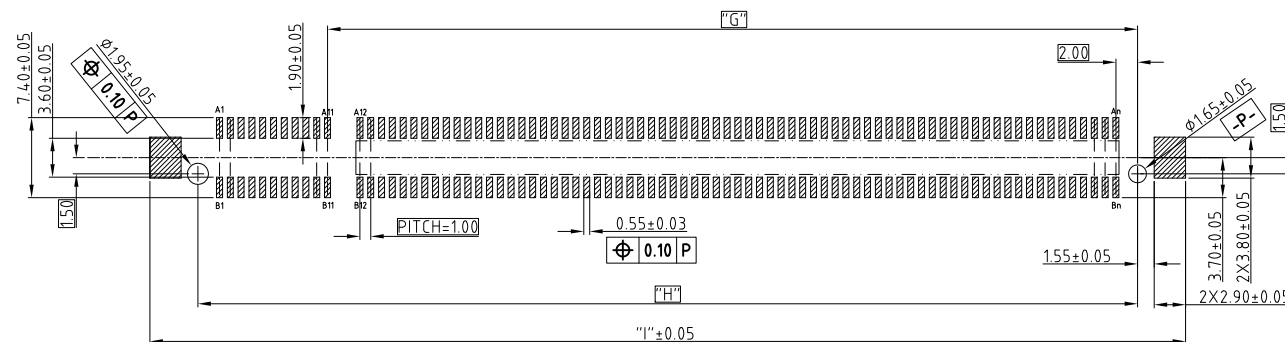

SECTION: A-A

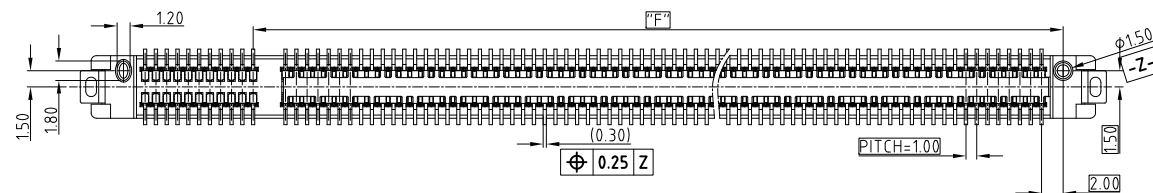

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

NOTE:



1. MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC BLACK UL94-V0
CONTACT: COPPER ALLOY
BOARDLOCK: SPCC
2. PLATING:
CONTACT: MATING AREA: SEE PLATING SEPC OVER 1.27-2.54 UM NICKEL UNDERPLATED
SOLDER AREA: 1.27 MIN TIN OVER 1.27-2.54 UM NICKEL UNDERPLATED
BOARDLOCK: 1.27 MIN TIN OVER 1.27-2.54UM NICKEL UNDERPLATED
3. ELECTRICAL PERFORMANCE:
RATED CURRENT FOR SIGNAL PIN: 0.7A/PIN;
RATED CURRENT FOR Power Pin:11A/pin(total:8pin Include:A2/A3/A9/A10/B1/B2/B3/B8).
4. PRODUCT SHALL MEET ALL DIMENSIONS BEFORE EXPOSURE TO 260°C MAX. FOR 10S
5. MATERIAL SHOULD BE FULFILLED AMPHENOL SPEC # SSN002
6. ORDERING PN: REFER TO THE PN SYSTEM
7. 25~32Gbps: THE ECB CONNECTS ALL GND PIN.
16Gbps max: DO NOT HAVE TO CONNECTS ALL GND PIN



UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE		Amphenol	
U.S. METRIC		DRAWN Xg.lfu		May.11,2018			
.X +/— 0.25		CHECKED					
.XX +/— 0.20		APPROVED					
.XXX +/— 0.15							
FRACTIONS +/—							
ANGLES +/— 5°							
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :		TITLE			
REMOVE SHARP EDGES		INTERNAL DRAWING CHECK CEE00XXXX01401YX		Cool Edge			
DIMENSIONS		ANGLE OF PROJECTION		1.0mm pitch connector			
— U.S. — INCHES —				SIZE DRAWING NO.		REV.	
(METRIC) (mm)				A3 C CEE00XXXX01401YX		2	
				SCALE NONE		SHEET 1 OF 2	

REVISIONS

Technical drawing of a vertical rod. The top diameter is dimensioned as 157 ± 0.15 . The rod tapers at an angle of 20° . The height of the tapered section is dimensioned as 130 ± 0.25 .

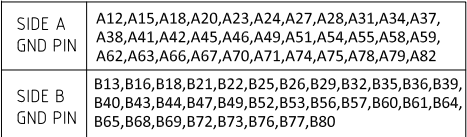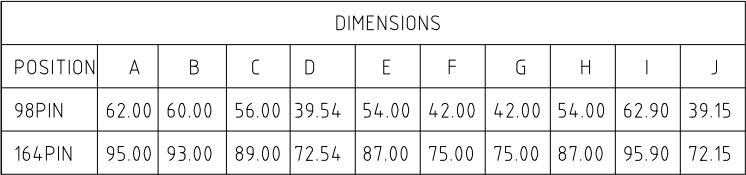A circular logo with a thick black border. Inside the border, the text "Amphenol Corporation" is written in a semi-circle at the top, and "2011/65/EU" is written at the bottom. In the center, the word "RoHS" is prominently displayed in a bold, sans-serif font, with the word "Compliant" written below it in a smaller, italicized font. A stylized, curved black line separates "RoHS" and "Compliant".

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9