





Copyright FCI.

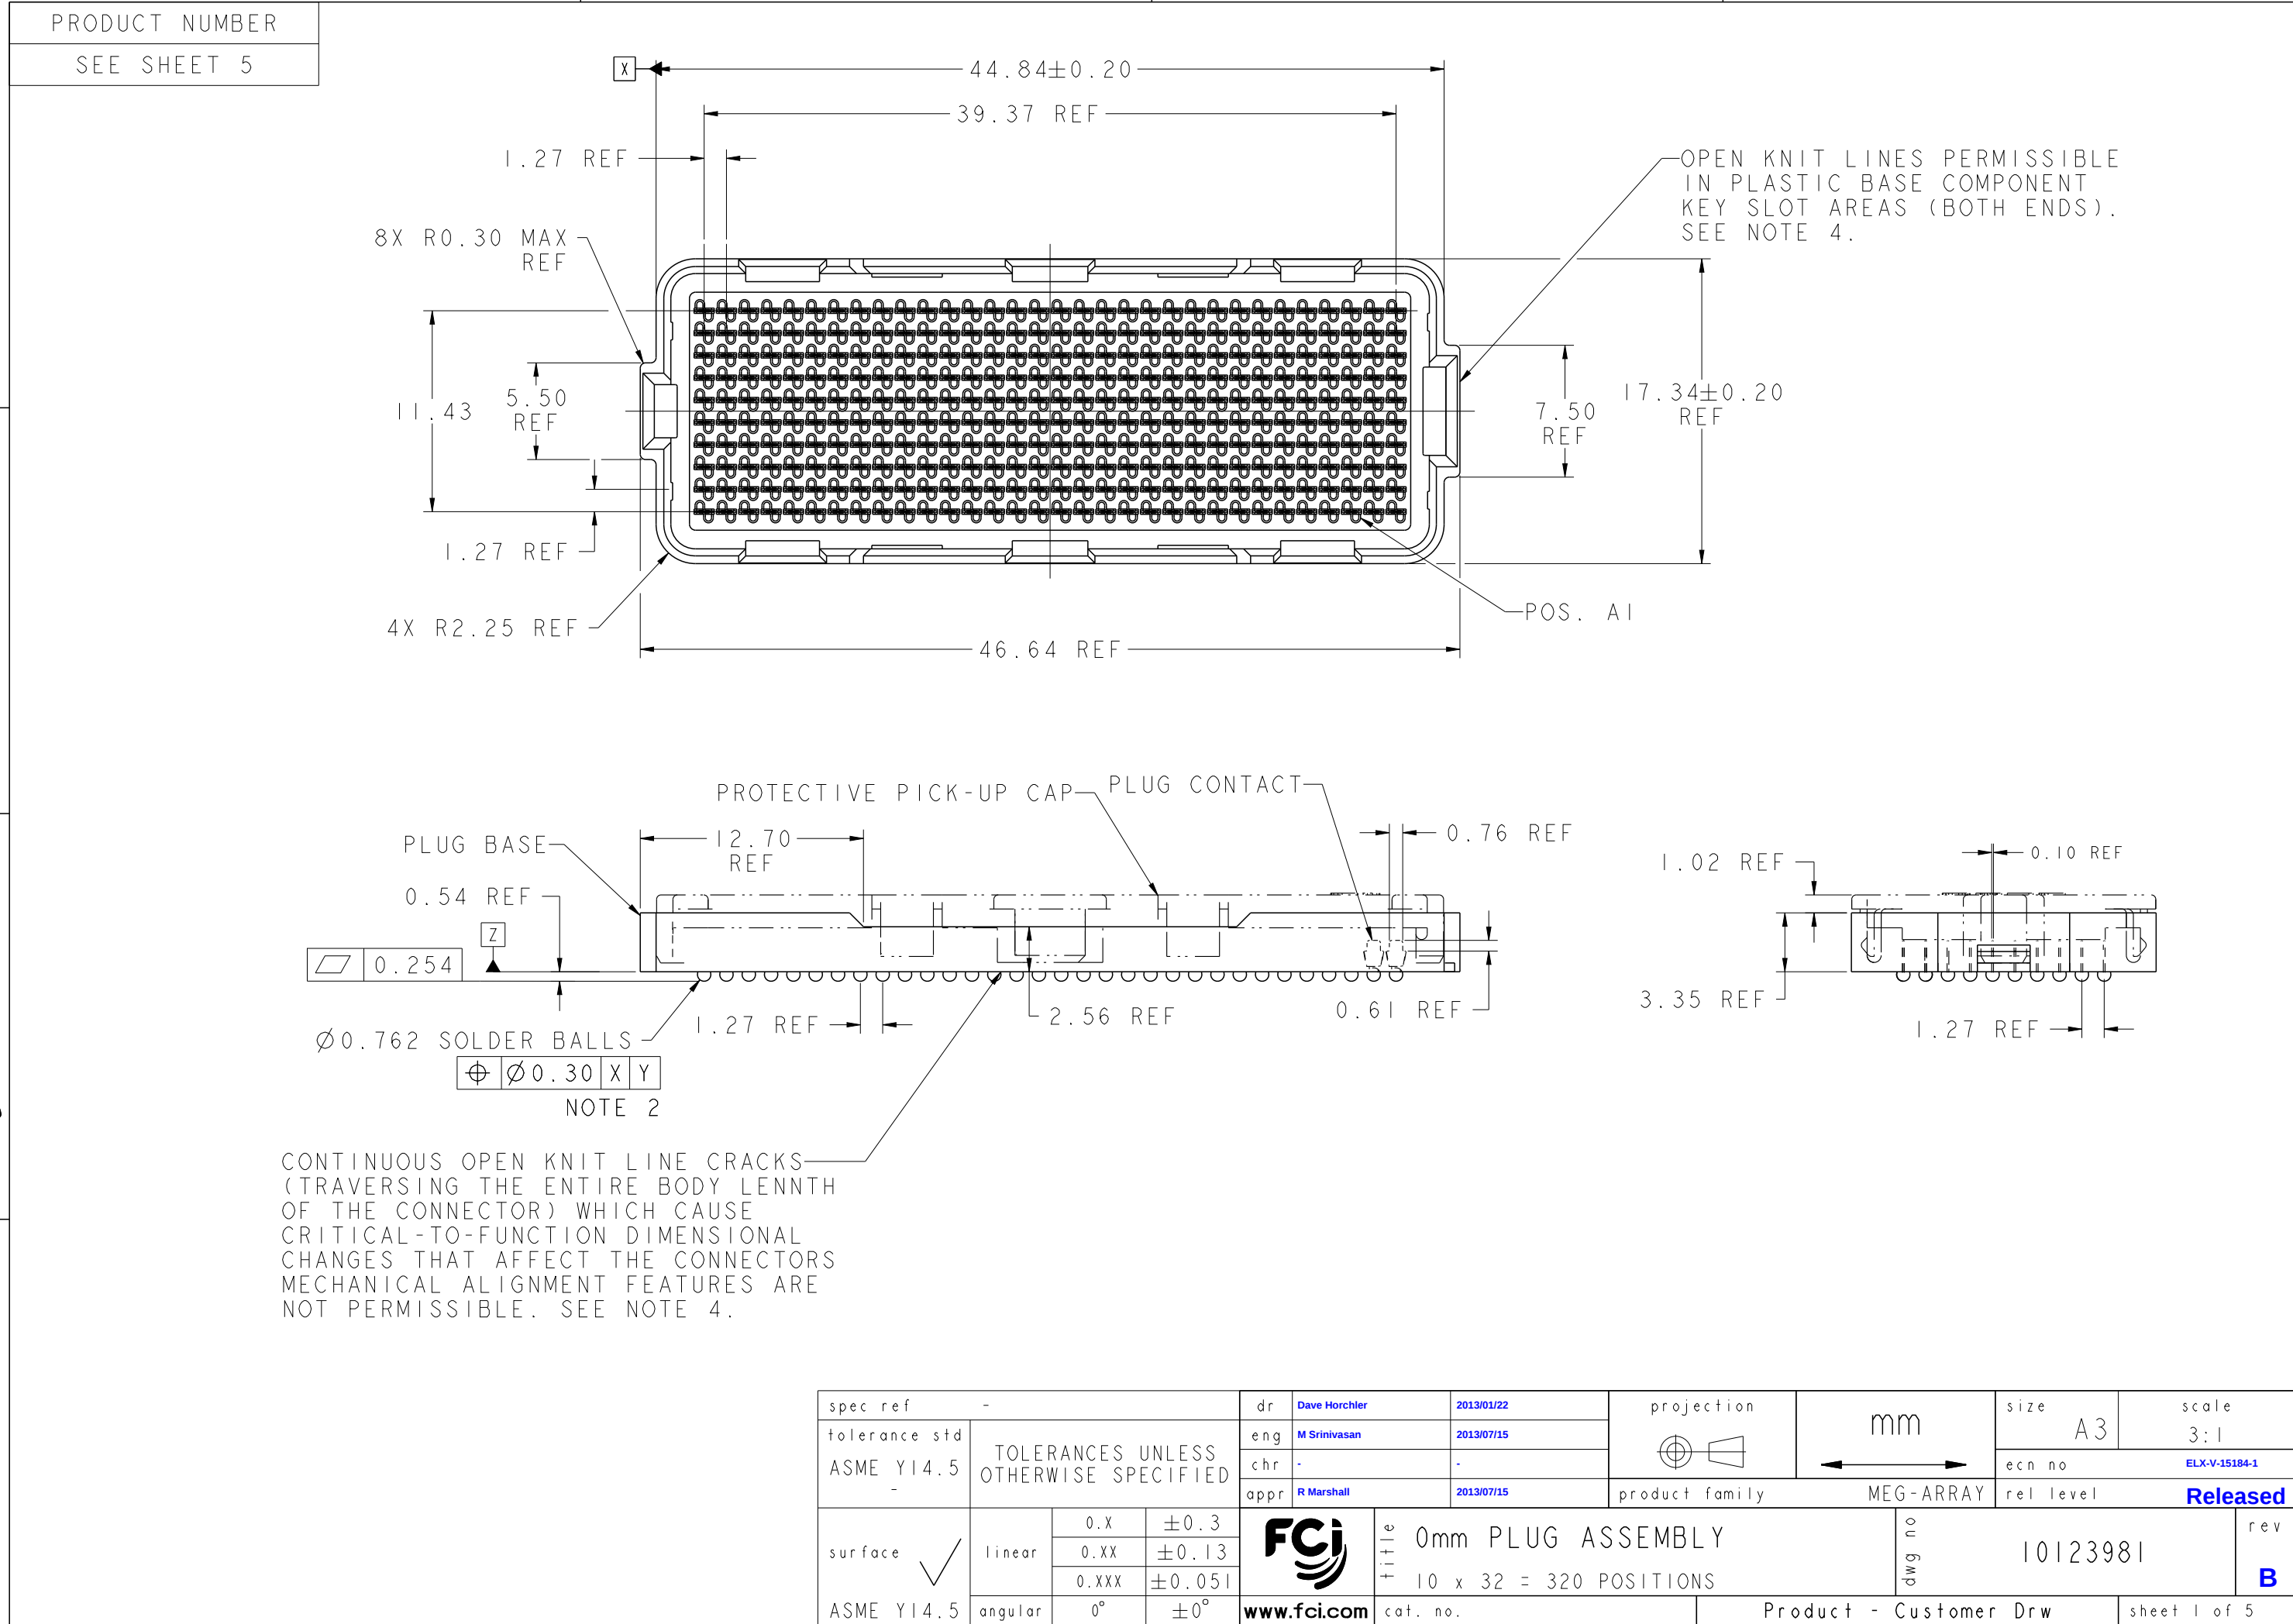


PRODUCT NUMBER
SEE SHEET 5

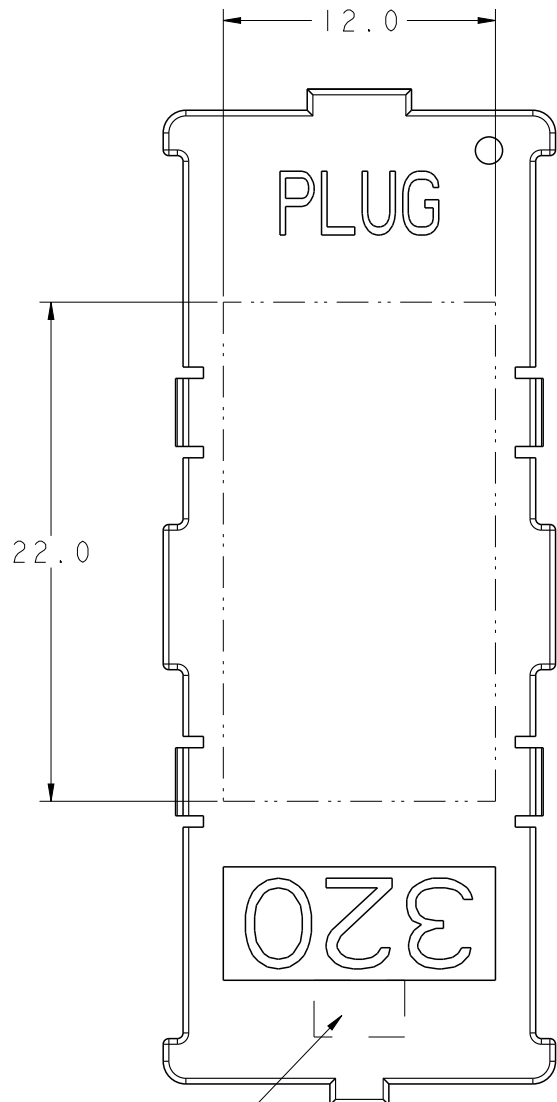

NOTE 6


FLAT AREA FOR
PICK-UP CAP

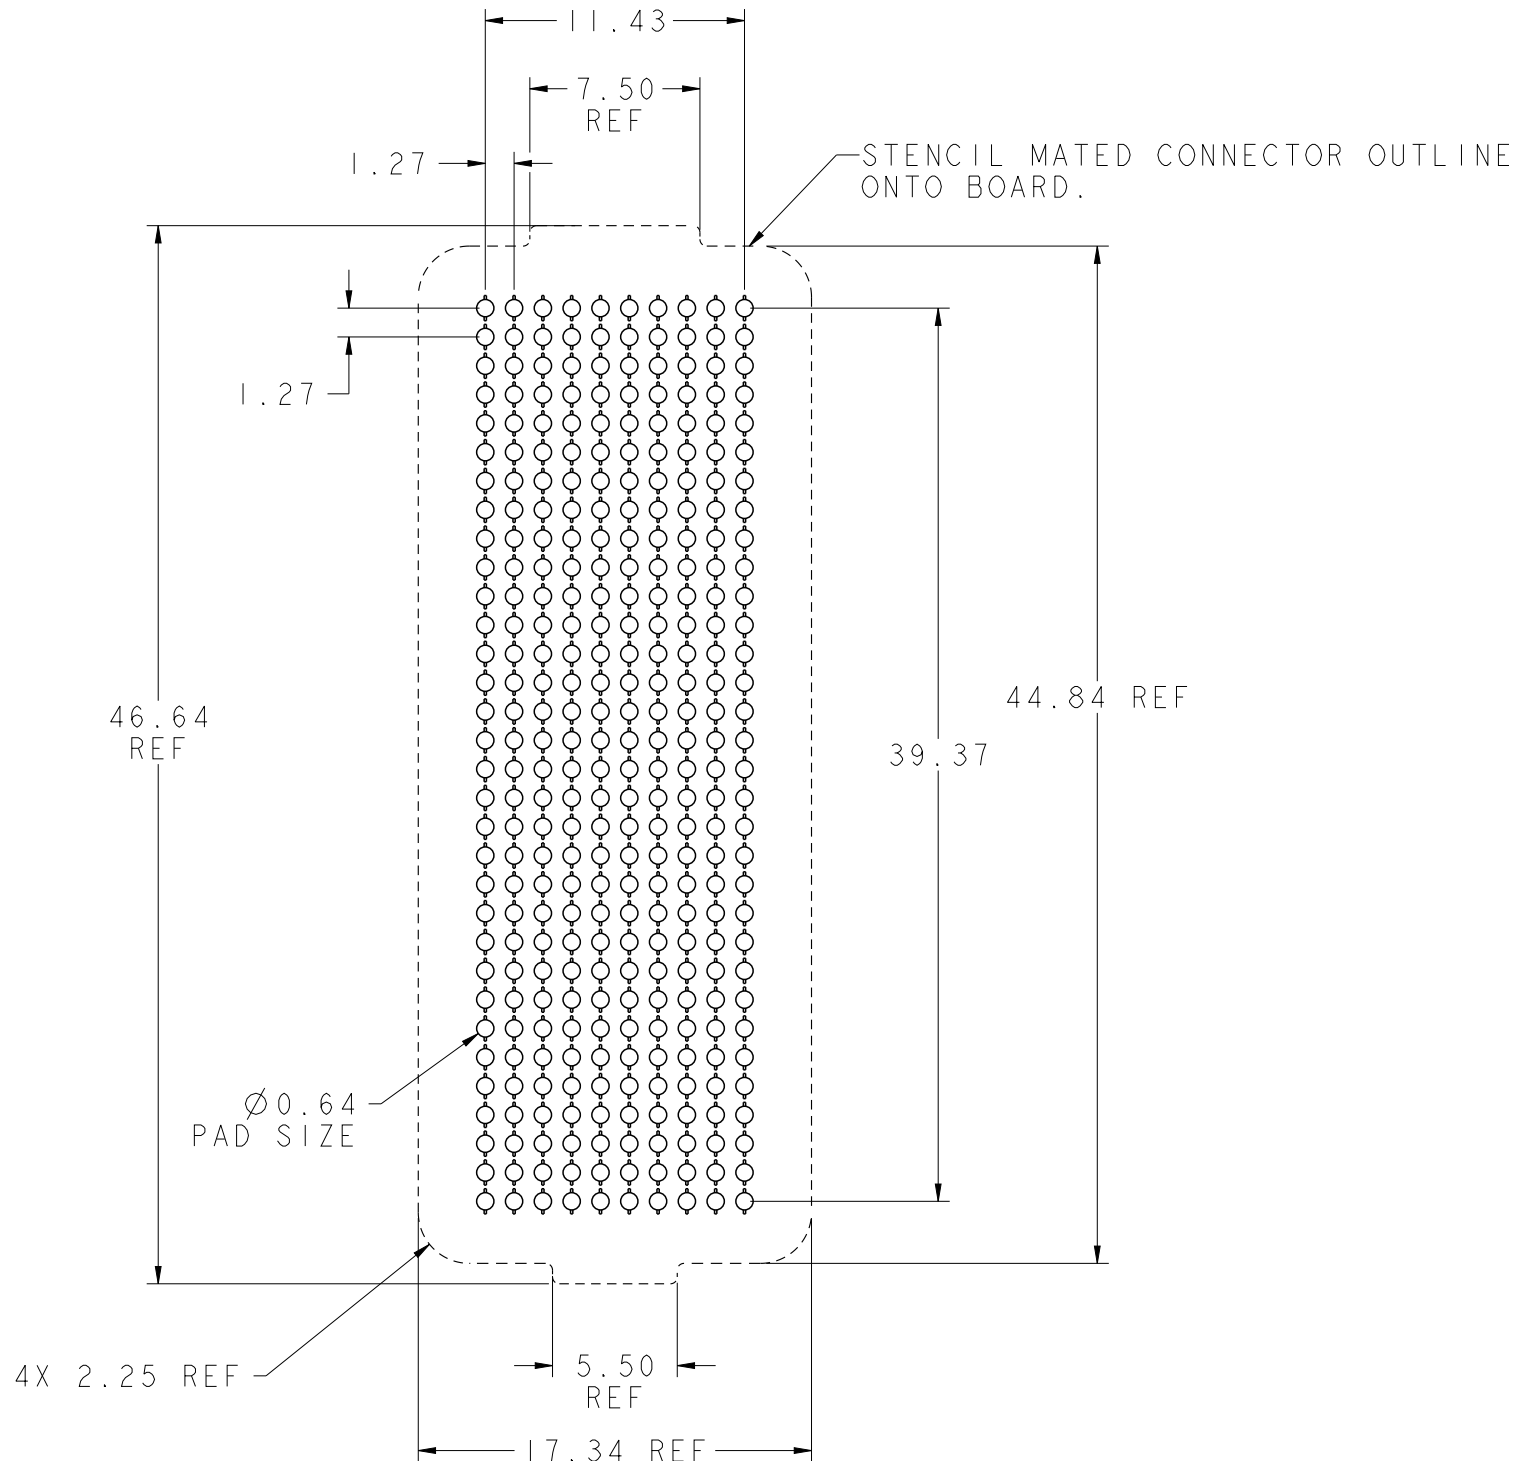

BOARD PATTERN


spec ref -				dr Dave Horchler		2013/01/22		projection 	mm 	size A3	scale 3:1
tolerance std ASME Y14.5 -	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng M Srinivasan		2013/07/15				ecn no ELX-V-15184-1	
				chr -		-					
				appr R Marshall		2013/07/15		product family MEG-ARRAY		rel level Released	
surface ✓ ASME Y14.5	linear	0.X	±0.3		title 0mm PLUG ASSEMBLY 10 x 32 = 320 POSITIONS				dwg no 10123981	rev B	
		0.XX	±0.13								
		0.XXX	±0.051								
angular		0°	±0°	www.fci.com		cat. no.		Product - Customer Drw		sheet 2 of 5	

PRODUCT NUMBER
SEE SHEET 5

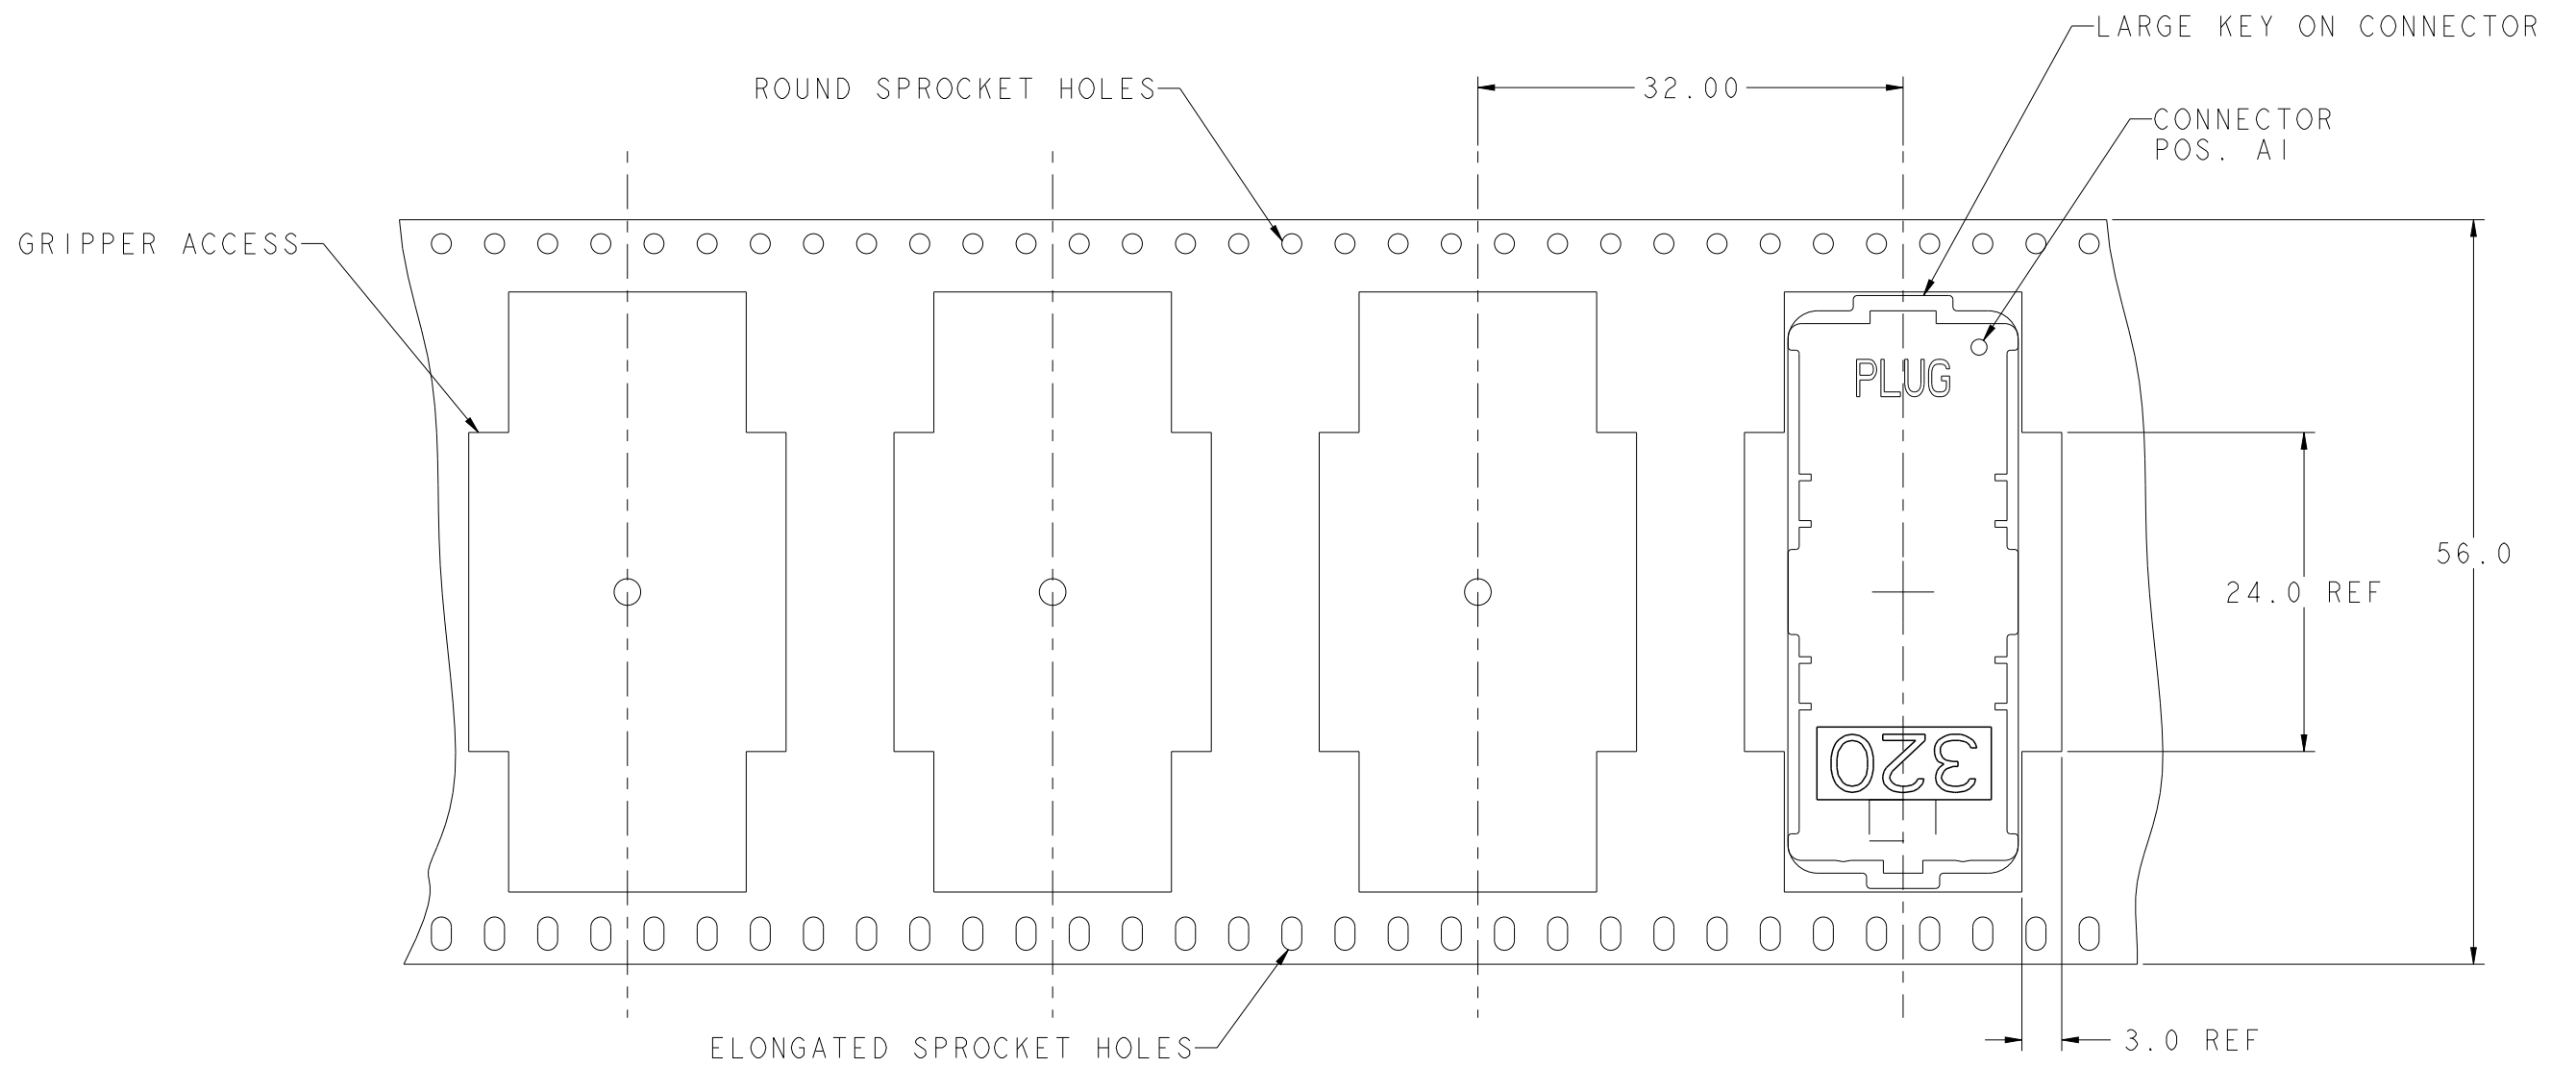

DIE - REEL DIRECTION


TAPE & REEL PACKAGING
PER EIA 481 - 3
SCALE NONE

spec ref -				dr	Dave Horchler	2013/01/22	projection 	mm 	size	A3	scale	3:1	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	M Srinivasan	2013/07/15			ecn no				ELX-V-15184-1
ASME Y14.5				chr	-	-			rel level				Released
-				appr	R Marshall	2013/07/15	product family		MEG-ARRAY				
surface ✓ ASME Y14.5	linear	0.X	±0.3		title 0mm PLUG ASSEMBLY 10 x 32 = 320 POSITIONS				dwg no	10123981		rev B	
		0.XX	±0.13										
		0.XXX	±0.051										
	angular	0°	±0°	www.fci.com	cat. no.			Product - Customer Drw			sheet 3 of 5		

PRODUCT NUMBER
SEE SHEET 5

PLUG ASSY
P/N 10123981-XXX

DIM "A" REF
MATED HEIGHT
AFTER REFLOW
SEE NOTE 3

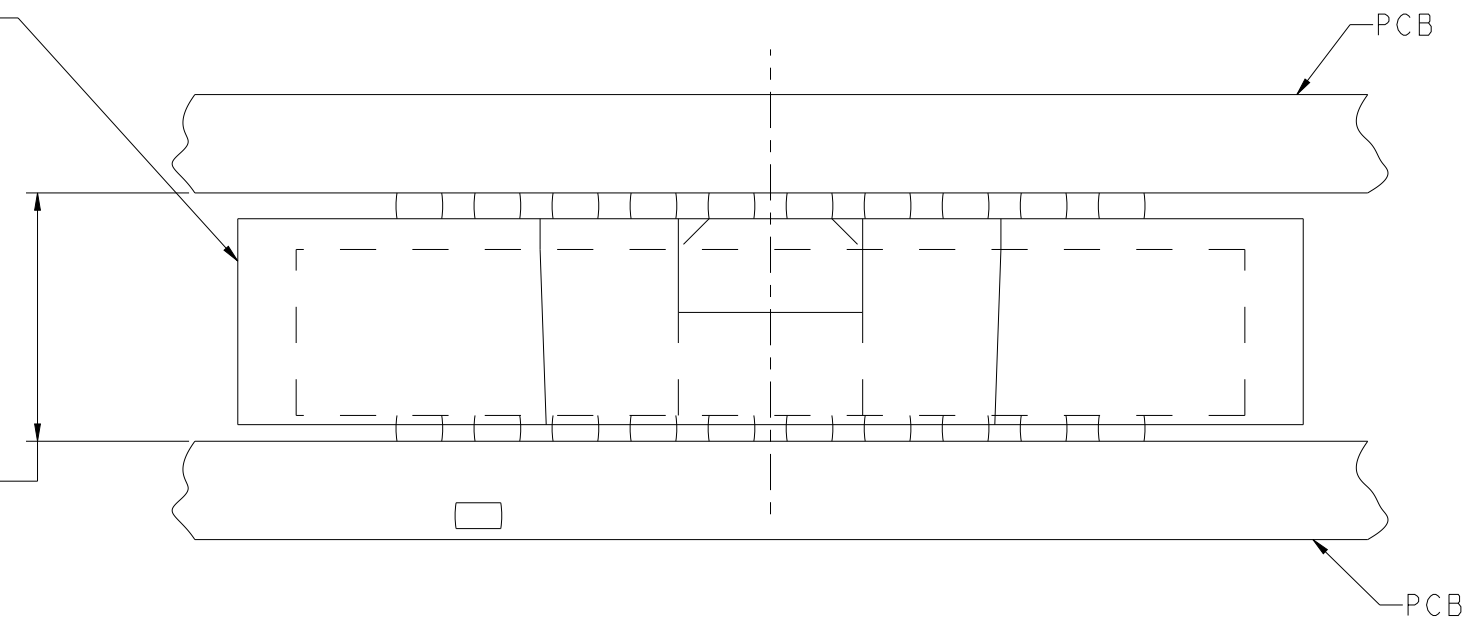

MATED HEIGHT AFTER REFLOW IS BASED ON Ø0.64mm PAD (METAL-DEFINED)
AND 0.13mm SOLDER PASTE STENCIL THICKNESS. SEE NOTE 3

END VIEW - MATED CONNECTORS
SCALE NONE

spec ref -				dr Dave Horchler		2013/01/22		projection				size A3		scale 3:1			
tolerance std ASME Y14.5 - TOLERANCES UNLESS OTHERWISE SPECIFIED				eng M Srinivasan		2013/07/15						ecn no ELX-V-15184-1					
				chr -		-											
								appr R Marshall		2013/07/15		product family MEG-ARRAY				rel level Released	
surface  ASME Y14.5		linear		0.X		±0.3				title 0mm PLUG ASSEMBLY 10 x 32 = 320 POSITIONS				dwg no 10123981		rev B	
				0.XX		±0.13											
				0.XXX		±0.051											
angular		0°		±0°		www.fci.com		cat. no.				Product - Customer Drw				sheet 4 of 5	



Copyright FCI.

B

C

D

PRODUCT NUMBER	PICK-UP CAP (NATURAL OR BLACK IN COLOR)	CONTACT PLATING AND THICKNESS	SOLDER BALL	NOTES
10123981-002	YES	15u" (.38um) Au	SnPb	
10123981-002LF	YES	15u" (.38um) Au	LEAD FREE	4 AND 5
10123981-092	YES	15u" (.38um) GXT	SnPb	
10123981-092LF	YES	15u" (.38um) GXT	LEAD FREE	4 AND 5
10123981-102	YES	30u" (.76um) Au	SnPb	
10123981-102LF	YES	30u" (.76um) Au	LEAD FREE	4 AND 5
10123981-192	YES	30u" (.76um) GXT	SnPb	
10123981-192LF	YES	30u" (.76um) GXT	LEAD FREE	4 AND 5
10123981-202	YES	50u" (1.27um) Au SPECIAL	SnPb	8
10123981-202LF	YES	50u" (1.27um) Au SPECIAL	LEAD FREE	4, 5 AND 8
10123981-292	YES	50u" (1.27um) GXT SPECIAL	SnPb	8
10123981-292LF	YES	50u" (1.27um) GXT SPECIAL	LEAD FREE	4, 5 AND 8
10123981-A02	YES	30u" (.76um) Au SPECIAL	SnPb	CUSTOMER SPECIAL
10123981-A02LF	YES	30u" (.76um) Au SPECIAL	LEAD FREE	CUSTOMER SPECIAL

NOTES:

① MATERIAL:
HOUSING: LCP-NATURAL
CONTACT: COPPER ALLOY

PLATING:
CONTACT: 15μ" (0.38μm) GXT OVER Ni UNDERPLATE
SOLDER BALL: LEAD FREE
95.5Sn/4Ag/0.5Cu

- ② SOLDER BALLS WILL NOT HAVE PERFECT SPHERICAL SHAPES DUE TO REFLOW ATTACHMENT.
- ③ MATED HEIGHT EFFECTED BY CUSTOMER'S PCB PAD SIZE, PLATING, SOLDER REFLOW PROFILE, & SOLDER PASTE.
- ④ FOR PROPER APPLICATION FOLLOW FCI APPLICATION SPECIFICATION GS-20-033 LEAD FREE SOLDER BALLS WILL NOT SOLDER PROPERLY IN A LEADED SOLDER PROCESS DUE TO A HIGHER REFLOW TEMPERATURE. LEAD FREE PRODUCT IS THEREFORE NOT BACKWARDS COMPATIBLE WITH LEADED OR SOME SOLDERING APPLICATIONS. REFERENCE FCI APPLICATION SPECIFICATION.
- ⑤ THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004 PRODUCT MEETING THIS DIRECTIVE IS IDENTIFIED IN THE LOT CODE NUMBER MARKED ON EACH PART BY HAVING AN "X" IN THE SEVENTH CHARACTER POSITION.
- ⑥ CURRENT COMPANY LOGO TO BE VISIBLE IN APPROXIMATE AREA SHOWN.

7. SEE PRODUCT SPEC GS-12-100 PER TEST AND PERFORMANCE INFORMATION.

- ⑧ PLATING FOR INDICATED -2XX SERIES NUMBERS MEET THE REQUIREMENTS OF GR-1217-CORE, CENTRAL OFFICE ENVIROMENT, (25 YEARS LIFE EXPECTANCY). THIS SERIES HAS SPECIAL CONTACT GEOMETRY.

spec ref -				dr Dave Horchler		2013/01/22		projection 	mm 	size A3	scale 3:1
tolerance std ASME Y14.5 -	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng M Srinivasan	2013/07/15		ecn no ELX-V-15184-1				
				chr -	-		rel level Released				
				appr R Marshall		2013/07/15		product family MEG-ARRAY			
surface  ASME Y14.5	linear	0.X	±0.3		title 0mm PLUG ASSEMBLY 10 x 32 = 320 POSITIONS				dwg no 10123981	rev B	
		0.XX	±0.13								
			0.XXX		±0.051						
www.fci.com				cat. no.				Product - Customer Drw			sheet 5 of 5

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9