


PART NUMBER	REV	FIRST USED
1385531 -1	A	122500-1
1385531 -2	A	565435-5
1385531 -3	A	354500-1

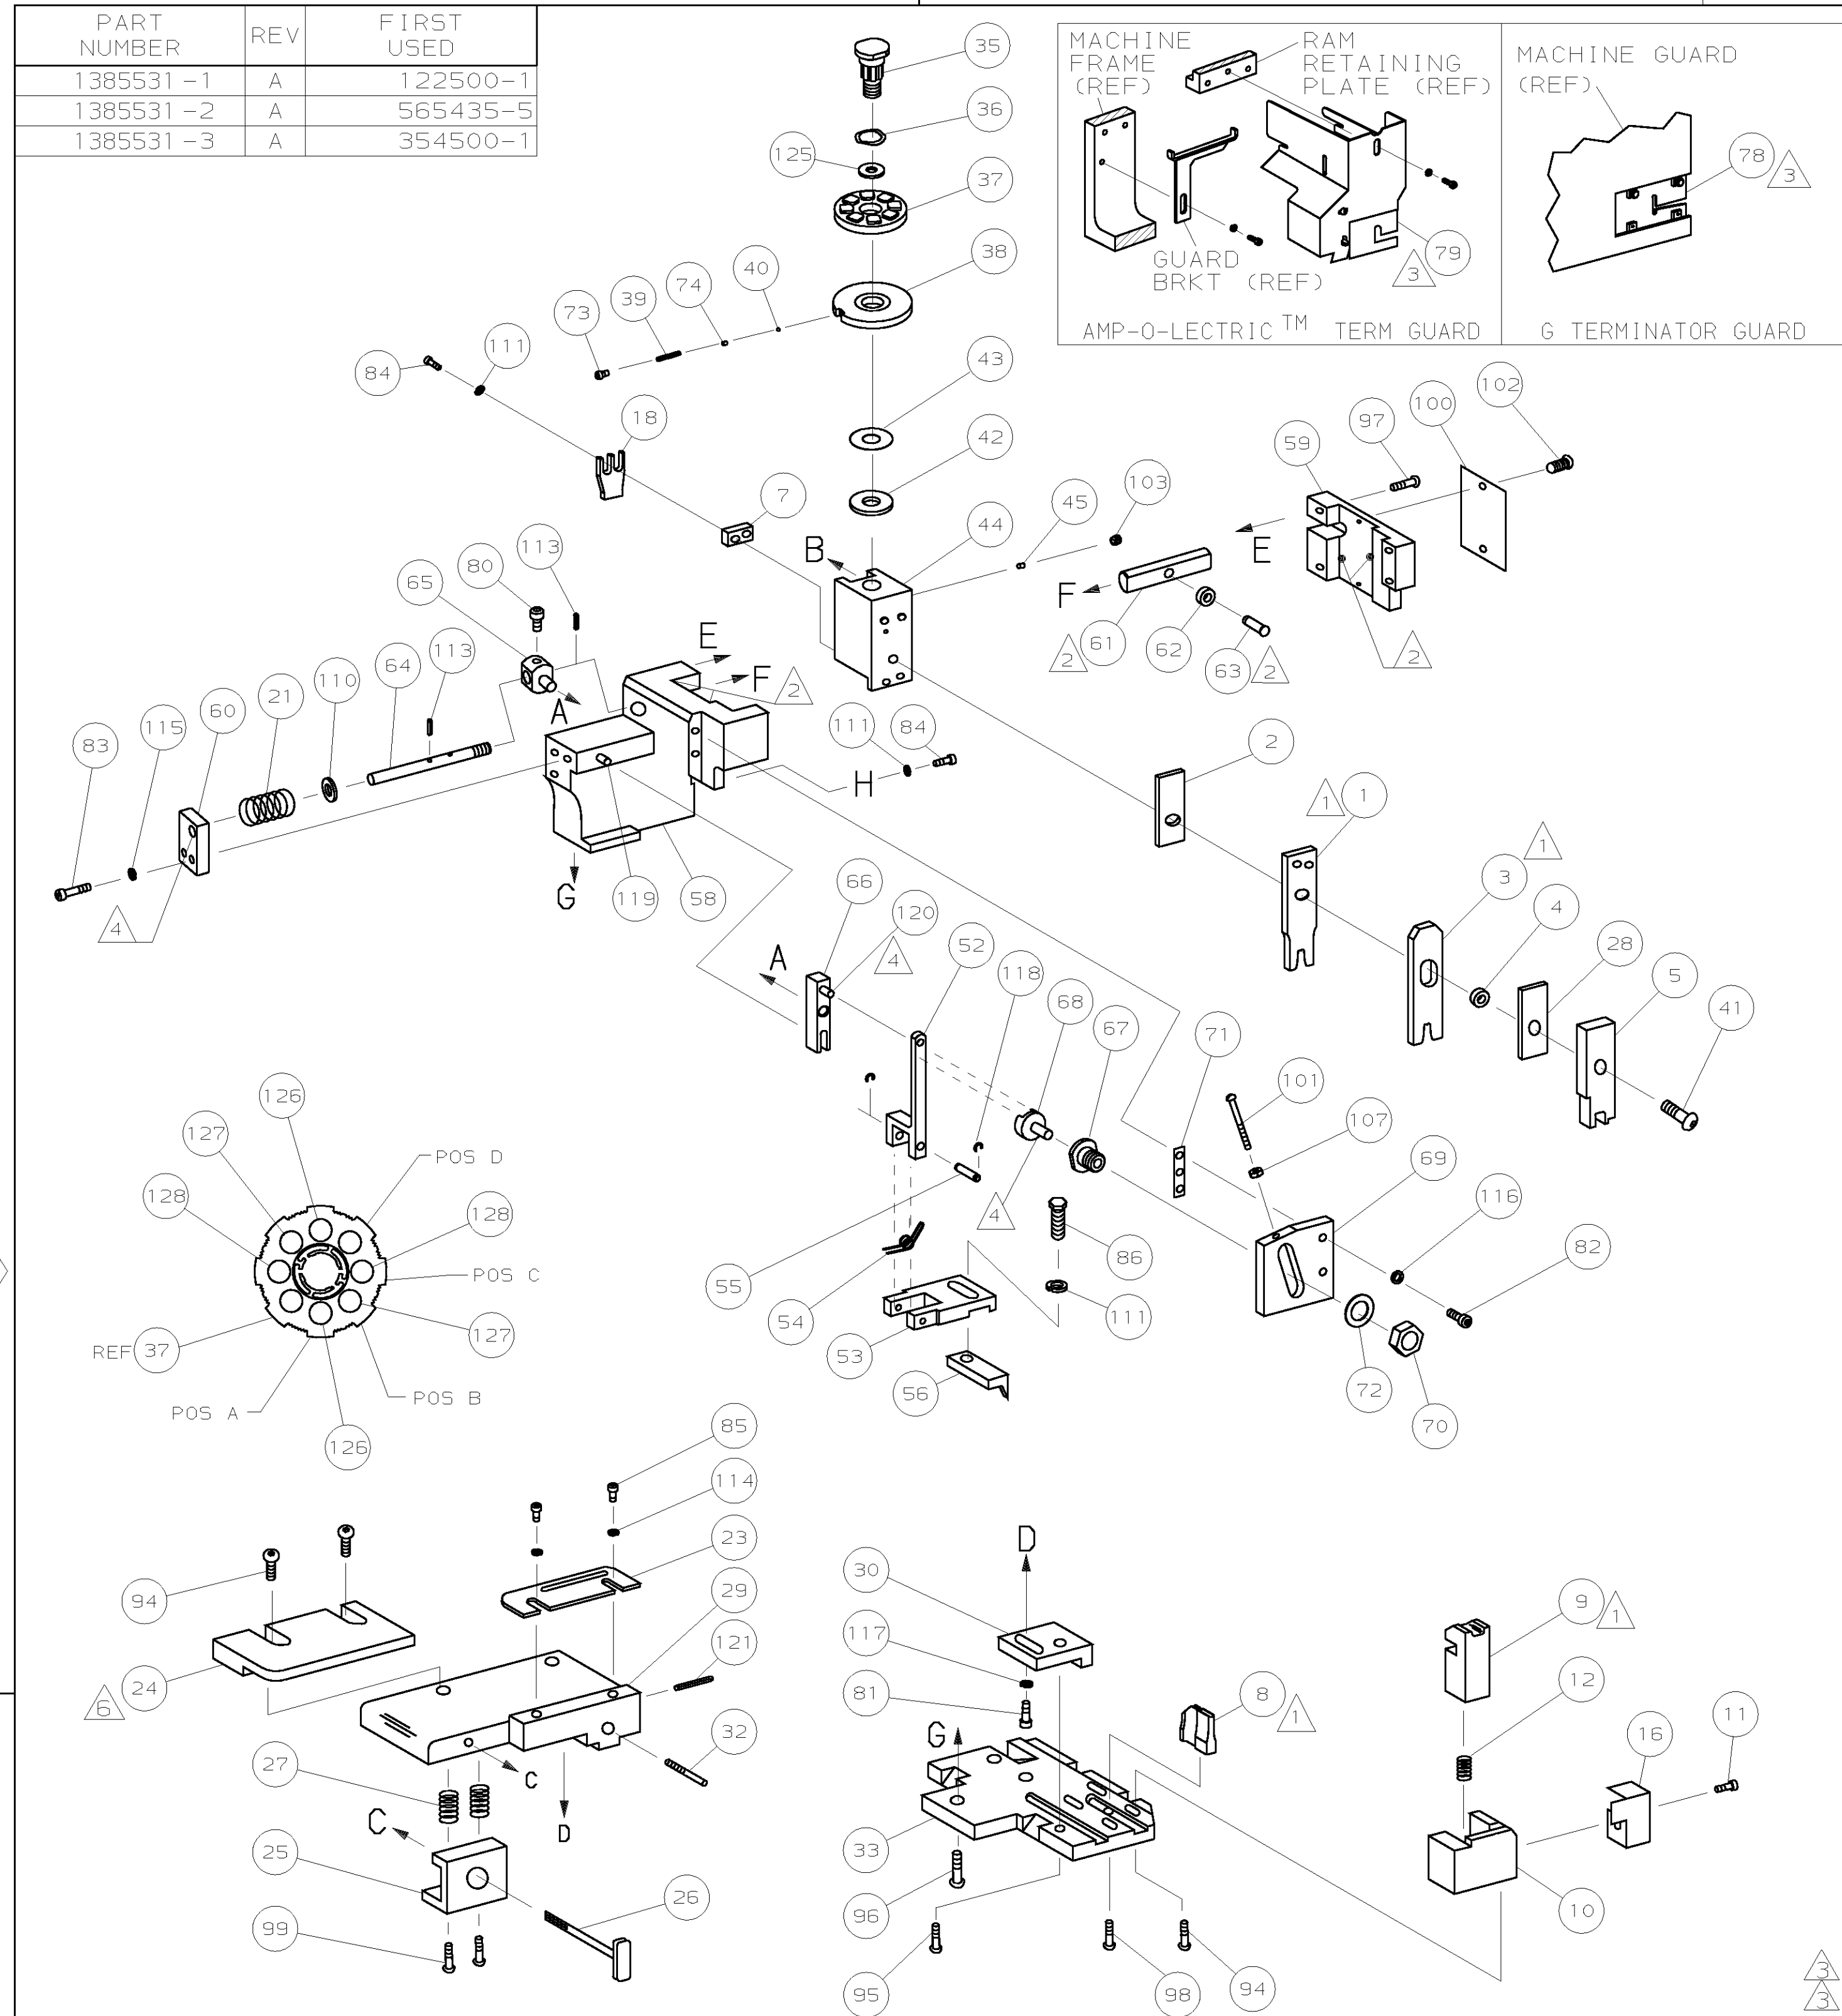

The diagram illustrates three methods for setting the leadmaker:

- POST FEED 1 5/8 STROKE:** Shows a leadmaker (44) with a reference point (91) and a distance of 47. The leadmaker is rotated 180° around point B.
- PRE FEED 1/8 STROKE:** Shows a leadmaker (44) with a reference point (91) and a distance of 48. The leadmaker is rotated 180° around point B.
- PRE FEED 1 5/8 STROKE:** Shows a leadmaker (44) with a reference point (91) and a distance of 49. The leadmaker is rotated 180° around point B.

Additional labels include "K TERMINATOR" and "G TERMINATOR" for the leadmaker, and "LEADMAKER" and "BENCH MACHINE" for the respective setups.

1. RECOMMENDED SPARE PARTS.
2. GREASE LIGHTLY.
3. GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE.
4. LUBRICATE DAILY USING NO. 20 MACHINE OIL.
5. ITEMS WITH QTY OF REF SPECIFIED (EXCEPT ITEMS 78 AND 79) ARE USED ON ITEM 46.
6. REAR STRIP GUIDE TO GUIDE ON INSULATION BARREL.
7. PUSH .062 PIN INTO RAM SO CRIMPER SPACER FITS FLAT AGAINST RAM.

TERMINAL NAME: SOCKET									
AMP TERM PN		MFR TERM PN		HARWIN TERMINAL AMP CRIMP SPECS					
1572209		M22-3040022		PAD LTR	CRIMP HEIGHT			WIRE SIZE	
				A	.024 ±.002 [0.61 ±0.05mm]			24	
				B	.022 ±.002 [0.56 ±0.05mm]			26	
				C	.020 ±.002 [0.51 ±0.05mm]			28	
				D	NOT			USED	
				CRIMP	SIZE		TYPE	RANGE	
				WIRE	.042 [1.07mm]		F	28-24	
				INSUL	.055 [1.40mm]		F	.046 MAX	
WIRE STRIP LENGTH		TERM APPL SPEC		FEED		APPL INSTRUCTION		SET UP GAGE	LAYOUT
.067-.084		NONE		.217		408-8040		458637-1	L275

2	2	2	-	C	7-354779-1	PIN, WIRE DISC (.3345)C	129
2	2	2	-	C	6-354779-7	PIN, WIRE DISC (.3325)B	127
2	2	2	-	C	6-354779-3	PIN, WIRE DISC (.3305)A	126
1	1	1	-	A	986950-1	WASHER, FLAT PRECISION	125
1	1	1	-	A	217238-1	GENERAL INSTRUCTION PACKAGE	124
1	1	1	-	-	4088040	SF APPL INST 408-8040	123
							122
1	1	1	-	A	4-21028-0	PIN,SLT SPR(Ø.093x.75)ST GDE PL	121
REF	REF	REF	-	A	1-21030-1	PIN,DOWEL (Ø.187x.50)LEVER	120
REF	REF	REF	-	A	1-21030-6	PIN,DOWEL (Ø.187x1.25)HOUSING	119
REF	REF	REF	-	A	21045-3	RING,RET "C"(Ø.187)FD FING PIN	118
1	1	1	-	A	21024-5	WASHER, LOCK (#10)ADJ BLOCK	117
REF	REF	REF	-	A	21024-5	WASHER,LOCK (#10)ADJ PLATE	116
REF	REF	REF	-	A	21024-5	WASHER,LOCK (#10)FEED GDE ROD	115
2	2	2	-	A	21024-2	WASHER,LOCK (#4)FRONT STP GUIDE	114
REF	REF	REF	-	A	5-21028-1	PIN,SLT SPR(Ø.125x.50)ADJ ROD	113
							112
4	4	4	-	A	21024-4	WASHER,LOCK (#8)STRIPPER	111
REF	REF	REF	-	A	21899-4	WASHER,FLAT (Ø5/16)SCREW ADJ	110
							109
							108
REF	REF	REF	-	A	21068-5	NUT, HEX (6-32)FEED ADJ	107
							106
							105
1	1	-	-	A	992031-1	PIN, CLEVIS	104
1	1	1	-	A	21009-2	SCR,SKT SET (1/4-20x.25 LW)RAM	103
2	2	2	-	A	21017-2	SCR,DRIVE (#2x.19)ID PLATE	102
REF	REF	REF	-	A	6-23715-5	SCR,PAN HD (6-32x1.50)FEED ADJ	101
1	1	1	-	B	461264-1	PLATE, IDENTIFICATION	100
2	2	2	-	A	3-21002-0	SCR,BHC (10-32x.88)DRAG	99
1	1	1	-	A	22733-8	SCR,BHC (8-32x.38 LW)ANVIL	98
REF	REF	REF	-	A	2-21002-9	SCR,BHC (10-32x.75)CAP	97
REF	REF	REF	-	A	2-22733-8	SCR,BHC (1/4-20x.62)HOUSING	96
REF	REF	REF	-	A	2-21002-7	SCR,BHC (10-32x.50)SG ADJ BLOCK	95
4	4	4	-	A	2-21002-2	SCR,BHC (8-32x.50)TERM H DWN	94
							93
							92
1	1	1	-	A	1-21002-7	SCR,BHC (6-32x.38)CAM	91
							90
1	1	-	-	A	7-21000-9	SCR,SHC (4-40x.19)STRIPPER	89
							88
2	2	2	-	A	2-21000-5	SCR,SKT CAP (6-32 x.25)	87
1	1	1	-	A	2-22603-0	SCR,HEX HD (8-32x.31)FEED FINGER	86
2	2	2	-	A	1-21000-3	SCR,SHC (4-40x.25)FR ST GUIDE	85
1	1	1	-	A	2-21000-7	SCR,SHC (8-32x.50)STRIPPER	84
REF	REF	REF	-	A	3-21000-7	SCR,SHC (10-32x.75)FEED ROD GD	83
REF	REF	REF	-	A	3-21000-6	SCR,SHC (10-32x.62)FD ADJ BLK	82
1	1	1	-	A	3-21000-4	SCR,SHC (10-32x.38)SG ADJ BL	81
REF	REF	REF	-	A	3-21000-4	SCR,SHC (10-32x.38)PIVOT BLK	80
-	REF	-	-	B	455749-1	GUARD, WINDOW	79
REF	-	-	-	B	679532-1	INSERT, GUARD	78
							77
							76
							75
1	1	1	-	A	690603-1	SPRING, ASSIST	74
1	1	1	-	A	23030-1	SCR,SHC (6-32x.25 SL)INS DISC	73
REF	REF	REF	-	A	458109-1	WASHER, SPECIAL	72
REF	REF	REF	-	A	690517-1	SPACER	71
-3	-2	-1	U/M	DWG SIZE	PART NO	DESCRIPTION	ITEM NO
QTY RECD PER ASSY				PARTS LIST			

LEADMAKER					MECH POST FEED			
-2	BENCH MODEL K				MECH PRE FEED			
-3	BENCH MODEL G				MECH PRE FEED			
REF	REF	REF	-	B	22594-8	NUT, HEX (1/2-20)	70	
REF	REF	REF	-	B	240628-1	PLATE, ADJUSTMENT	69	
REF	REF	REF	-	B	240626-1	SHAFT, PIVOT	68	
REF	REF	REF	-	B	240633-1	BUSHING	67	
REF	REF	REF	-	A	455680-1	LEVER, INTERMEDIATE	66	
REF	REF	REF	-	B	240629-1	BLOCK, PIVOT	65	
REF	REF	REF	-	A	240632-2	SCREW, ADJ FEED ROD	64	
REF	REF	REF	-	B	240659-3	PIN, CAM ROLLER	63	
REF	REF	REF	-	B	240658-1	ROLLER, CAM	62	
REF	REF	REF	-	B	454398-2	ROD, FEED	61	
REF	REF	REF	-	A	454178-1	GUIDE, FEED ROD	60	
REF	REF	REF	-	C	454220-1	CAP, RAM	59	
REF	REF	REF	-	D	454485-1	HOUSING	58	
							57	
1	1	1	-	B	690542-2	PAWL, FEED	56	
REF	REF	REF	-	B	240624-1	PIN, FEED FINGER	55	
REF	REF	REF	-	B	691499-1	SPRING, FEED FINGER	54	
REF	REF	REF	-	B	690541-1	HOLDER, FEED FINGER	53	
REF	REF	REF	-	A	455679-1	LEVER, TERMINAL FEED ARM	52	
							51	
							50	
1	-	-	-	B	690602-6	CAM, PRE-FEED 1 5/8 ST	49	
-	1	-	-	B	690602-5	CAM, PRE-FEED 1 1/8 ST	48	
-	-	1	-	B	690501-4	CAM, POST-FEED 1 5/8 ST	47	
1	1	1	-	B	459456-1	APPLICATOR, BASIC (SUBASSY)	46	
1	1	1	-	A	690191-1	PLUG, NYLON	45	
1	1	1	-	C	455673-3	RAM	44	
1	1	1	-	A	690125-1	WASHER, LAMINATED	43	
1	1	1	-	A	690124-1	WASHER, RAM	42	
1	1	1	-	A	7-21002-9	BOLT, CRIMPER(5/16x1.00)	41	
1	1	1	-	A	23241-6	BALL, STEEL	40	
1	1	1	-	A	690170-1	SPRING, COMPRESSION	39	
1	1	1	-	C	690142-1	DISC, INSULATION	38	
1	1	1	-	D	354777-1	WIRE DISC, PLASTIC	37	
1	1	1	-	A	22480-5	WASHER, SPRING	36	
1	1	1	-	B	690212-1	POST, RAM	35	
							34	
REF	REF	REF	-	D	455675-1	PLATE, BASE	33	
1	1	1	-	A	690432-3	SCREW, ADJUSTMENT	32	
							31	
REF	REF	REF	-	B	455689-1	BLOCK, STRIP GUIDE ADJ	30	
1	1	1	-	C	455671-1	PLATE, STRIP GUIDE	29	
1	1	1	-	C	1-455888-0	SPACER, FRONT SHEAR DEP	28	
2	2	2	-	A	1-22284-0	SPRING, DRAG	27	
1	1	1	-	B	690546-1	LEVER, DRAG RELEASE	26	
1	1	1	-	B	240792-1	DRAG, TERMINAL	25	
1	1	1	-	D	2-90765-6	GUIDE, STRIP (REAR)	24	
1	1	1	-	A	690438-1	GUIDE, STRIP (FRONT)	23	
-	-	1	-	B	690472-2	STRIPPER	22	
REF	REF	REF	-	A	4-22284-9	SPRING, FEED RETURN	21	
1	1	-	-	A	679218-1	STRIPPER WIRE STOP ASSY	20	
1	1	-	-	B	458949-1	STRIPPER	19	
1	1	1	-	B	1-690518-9	HOLDER, TERMINAL	18	
							17	
1	1	1	-	B	318563-1	GUARD, CHIP, FRONT	16	
							15	
							14	
							13	
1	1	1	-	A	5-22280-0	SPRING, SHEAR	12	
1	1	1	-	B	690461-1	STOP, SHEAR	11	
1	1	1	-	C	690459-1	HOLDER, SHEAR (FRONT)	10	
1	1	1	-	C	462006-1	SHEAR, FLOAT (FRONT)	9	
1	1	1	-	C	7-805887-9	ANVIL	8	
1	1	1	-	C	5-240641-8	SPACER, DEPRESSOR (REAR)	7	
							6	
1	1	1	-	C	1-455889-4	DEPRESSOR, SHEAR (FRONT)	5	
1	1	1	-	B	2-238011-3	SPACER, BLOCK CRIMPER	4	
1	1	1	-	C	5-683453-2	CRIMPER, INSULATION	3	
1	1	1	-	C	455888-2	SPACER, CRIMPER	2	
1	1	1	-	C	2-456401-8	CRIMPER, WIRE	1	
-3	-2	-1	U/M	DWG SIZE	PART NO	DESCRIPTION	ITEM NO	
				← REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION)				
QTY REQD PER ASSY				PARTS LIST				
DIMENSIONS IN INCHES. DO NOT SCALE PRINT. TOLERANCES UNLESS OTHERWISE SPECIFIED: 2 PLC DEC ± 3 PLC DEC ± 4 PLC DEC ± ANGLES ± SURF TEXTURE; REMOVE BURRS, BREAK SHARP EDGES R.015 MAX				MATL		HT TR	FIN	
				-		-	-	
				DR B.HIGMAN 17DEC02		APP T.ELBIN 17DEC02		
				CHK -		REL -		
				AMP		Tyco Electronics Harrisburg, PA 17105-3608		
				NAME SIDE FEED HDM APPLICATOR			MACHINE REF	
				SCALE -			MINI APPL	
				DWG NO 1385531			SHEET 1 of 1	
							REV A	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9