




Made in the United States of America




Available in blue and yellow

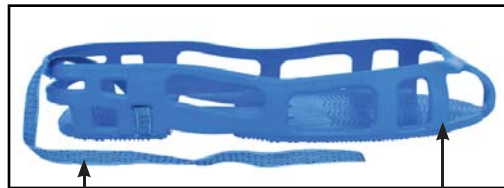

Side View

B

A



Bottom View

C

### Components

- A. Non-Marring Thermoplastic Elastomer (TPE)
- B. 30 Inch Conductive 8-Strand Nylon Polyester Grounding Tab
- C. Size molded on bottom of unit

### Electrical Properties

Property	Test Method	Value
Point to Groundable Point Resistance:	ANSI/ESD STM97.1, ESD SP9.2, ESD TR53	< 1 x 10 <sup>9</sup> ohms
Walking Voltage Generation:	ANSI/ESD STM97.2	<50 Volts (conductive flooring)
	ANSI/ESD STM97.2	<100 Volts (dissipative flooring)

See independent test lab report [here](#).

### Specifications

Construction: Thermoplastic Elastomer (TPE)

Yellow	<a href="#">04564</a>	<a href="#">04565</a>	<a href="#">04566</a>	<a href="#">04567</a>
Blue	<a href="#">04597</a>	<a href="#">04594</a>	<a href="#">04595</a>	<a href="#">04596</a>
Size	Small	Medium	Large	XLarge
Length	9.5"	10.25"	11"	11.75"
Width	3.25"	3.75"	4.375"	4.625"
Shoe Size Women	5-8	8.5-10.5	11-13.5	13.5+
Shoe Size Men	4-6	6.5-8.5	9-12	12.5-14.5
Shoe Size EU	35-38	39-43	44-46	46-48

Sold in pairs

Unless otherwise noted, tolerance +/- 10%

Specifications and procedures subject to change without notice.

#### RoHS 2 and REACH Statement

None of the RoHS 2 restricted materials or REACH substances of very high concern are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See Desco Limited Warranty at [Desco.com](#).

"All personnel shall be bonded or electrically connected to the grounding / equipotential bonding system when handling ESDS [ESD sensitive] items. ...For standing operations, personnel shall be grounded via a wrist strap or by a footwear/ flooring system." [ANSI/ESD S20.20 section 8.2 Personnel Grounding]

"If the contact area between the bottom of the foot and the floor is not continuous, charge generation may occur; especially when a person is walking. Heel straps must be worn on both feet to minimize the amount of time that the body of the person is isolated from ground while walking." [ESD Handbook ESD TR20.20 section 5.2.3 Flooring-Footwear System]

\*Patent US008189318B2

### stat-A-REST™ Foot Grounders

# DESCO

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: [Desco.com](#)  
PHONE (909) 627-8178

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407  
PHONE (781) 821-8370

**DRAWING  
NUMBER**  
04594

**DATE:**  
August  
2016

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9