

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

ATLANTIC VERSION
TERMINATOR
INTERFACE ADAPTER

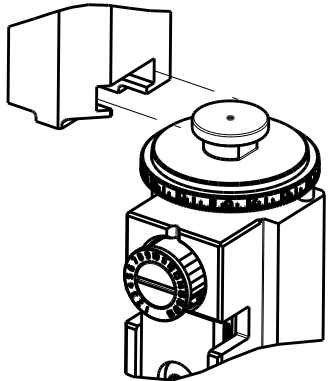

PART
NUMBER

2150041-2

REVISION

A

DESCRIPTION

FINE CRIMP HEIGHT ADJUST

FEED TYPE

PNEUMATIC

PART
NUMBER

2150041-5

REVISION

A

DESCRIPTION

FINE CRIMP HEIGHT ADJUST

FEED TYPE

SERVO
LATCH PLATE⁴

PART
NUMBER

2150041-6

REVISION

A

DESCRIPTION

NON-CRIMP HEIGHT ADJUST

FEED TYPE

SERVO
LATCH PLATE⁴¹¹

PART
NUMBER

2150041-7

REVISION

A

DESCRIPTION

FINE CRIMP HEIGHT ADJUST

FEED TYPE

NONE

PART
NUMBER

7-2150041-7

REVISION

A

DESCRIPTION

CRIMP TOOLING KIT

FEED TYPE

-

APPLICATOR DATA

CRIMP

SIZE

TYPE

WIRE

2.79 mm [.110]

F

INSUL

4.57 mm [.180]

F

APPL INSTRUCTIONS

408-10390




TERMINAL DATA: TE TERMINAL

TE CRIMP SPECIFICATION

TERMINAL NAME: 250 SERIES TAB WITH LATCH

WIRE STRIP LENGTH



INSULATION DIAMETER RANGE

4.80-5.60 mm [.189-.220 IN]

Ø2.10-3.40 mm [.083-.134 IN]

TERMINAL APPLICATION SPECIFICATION



114-5052

-

-

TERMINALS APPLIED



10

TE TERMINAL

TE TERMINAL

TE TERMINAL

TE TERMINAL

170030-1

170030-2

170030-3

170030-4

170030-5

170030-9

170340-1

170340-3

1-170340-3

WIRE SIZE





CRIMP HEIGHT mm [INCH]



CRIMP HEIGHT REFERENCE SETTING⁹

14 AWG OR 2.00mm2

1.68+/-0.05 [.066+/- .002]

6.8

1.50mm2

1.63+/-0.05 [.064+/- .002]

7.0

16 AWG OR 1.25mm2

1.55+/-0.05 [.061+/- .002]

8.1

18 AWG OR 0.85mm2

1.42+/-0.05 [.056+/- .002]

9.4



1

RECOMMENDED SPARE PARTS

2

GREASE BEARING SURFACES LIGHTLY

3.

LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4

APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2150041-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2150041-5
SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2150041-6

5.

ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.

6

APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 50, 62 & 242.
FOR -6 ONLY APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 37, 50 & 242.

7

GREASE THREADS, GROOVE AND O-RING ON ITEMS 35 & 252.

8

MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.

9

CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.

10

TERMINAL PITCH NOT COMPATIBLE WITH MECHANICAL FEED.

11

WHEN ASSEMBLING -6 NON-CRIMP HEIGHT ADJUST APPLICATOR USE SHIM PACK 2119951-2 TO ALIGN APPLICATOR'S MAXIMUM WIRE CRIMP HEIGHT AT NORMAL TERMINATOR SHUT HEIGHT

AMP 4805 REV 31MAR2000

*WARNING
ON INSTALLATION, SET WIRE DISC, ITEM 40 TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

-	1	1	1	1	455888-3	SPACER, CRIMPER	261
-	-	1	-	-	2119957-2	APPLICATOR SHIM PACK	260
-	1	-	1	1	8-21084-0	O-RING, .676 ID, .070 DIA. MAT.	252
-	-	-	-	1	2119640-1	PUSH ROD, AIR FEED	250
-	-	-	-	1	2079988-1	BUSHING, LCH5-12, MISUMI	249
-	-	-	-	1	2119641-1	FEED CAM, AIR FEED	248
-	1	-	1	1	2119798-1	DETENT PIN	247
-77	-7	-6	-5	-2	PART NO	DESCRIPTION	ITEM NO

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

SET UP GAUGE
2119599-2

LOC
A

DIST
66

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	DEVELOPMENT	13JAN2012	KH	SX
	2	UPDATE	08MAY2013	CC	UG
	A	RELEASED	06AUG2013	YY	UG
A1		ECR-14-007662	22MAY2014	JH	TE

-

1

-

1

1

1-22279-3

SPRING, COMPRESSION

246

-

-

1

-

-

2119759-1

RAM, AMP STYLE, END FEED, NON-ADJUST

245

-

1

1

1

1

2119082-9

CAM, SNAIL, INSULATION ADJUSTMENT

244

-

1

1

1

1

2079764-1

WASHER, WAVE SPRING, CREST-TO-CREST

243

-

1

1

1

1

2119083-1

RETAINER, INSULATION DIAL

242

-

-

2

2

-

2168400-7

SHCS, LOW HEAD, RoHS, M5 X 10

240

-

-

-

-

1

2063440-2

AIR FEED MODULE

238

-

2

2

2

2

1-2079383-0

SCR, BHSC, RoHS (M3 X 6)

230

-

-

1

1

-

2119740-2

TAG, IDENTIFICATION

213

-

-

REF

REF

-

1901697-1

FEED FINGER ASSEMBLY, EF

183

-

1

1

1

1

1-1976053-7

LOCATER BLOCK, TERMINAL

179

-

1

1

1

1

6-993111-6

PIN, SLOTTED SPRING 3.0 X 14.0

177

-

1

1

1

1

8-22280-7

SPRING, COMPRESSION

176

-

1

1

1

1

1752353-2

GUIDE PIN, HOLDDOWN

175

-

1

1

1

1

1901680-2

GUIDE PIN, HOLDDOWN

174

-

-

-

-

2

21045-3

RING, RETAIN, EXTERN, 3/16 CRESCENT

172

-

1

1

1

1

994969-1

MAGNET, RARE EARTH HIGH ENERGY

166

-

REF

REF

REF

REF

994970-2

COUNTER, MAGNETIC

164

-

-

-

-

1

240638-1

SPRING, FEED FINGER

163

-

-

-

-

1

3-23627-7

PIN, RETAIN, GRVD, 3/16 X .854

137

-

-

REF

REF

-

SEE NOTE 4

MEMORY CHIP, PROGRAMMED

135

-

-

1

1

-

1633743-1

SERVO FEED LATCH ASM

133

-

1

1

1

1

455888-5

SPACER, CRIMPER

82

-

1

1

1

1

2119791-9

DEPRESSOR, WIRE

73

-

1

1

1

1

2119956-2

DOCUMENTATION PACKAGE

71

-

2

2

2

2

2-18032-2

SCR, SET, FLT POINT M3 X 10.0

70

-

1

1

1

1

2119943-1

WASHER, SPACER

69

-

1

-

-

1

2119740-1

TAG, IDENTIFICATION

67

-

2

2

2

2

2168078-1

SCREW, DRIVE, RH, RoHS, 2 x .188

66

-

1

1

1

1

1-1901681-5

HOLDDOWN, TERMINAL

65

-

1

-

1

1

2119793-1

LIMITER, ADJUSTMENT BOLT

63

-

3

-

3

3

992763-5

SCR, SET, SOC, CONE POINT, M3 x 4.0

62

-

1

1

1

1

2079383-4

SCR, BHSC, RoHS (M4 X 8)

60

-

4

4

4

4

2168400-4

SHCS, LOW HEAD, RoHS, M4 X 8

57

-

2

2

2

2

2168083-8

SCR, SKT HD CAP, RoHS, M4 X 16

56

-

2

2

2

2

5018030-2

NUT, HEX, REG, RoHS, M4

55

-

2

2

2

2

5018030-1

NUT, HEX, REG, RoHS, M3

54

-

2

2

2

2

986965-8

NUT, LOCK, HEX, TORQUE (M4)

53

-

1

1

1

1

1-5018030-0

NUT, HEX, REG, RoHS, M3.5

52

-

-

-

-

1

2119792-2

PAWL, EF, AIR

51

-

1

1

1

1

1-1752354-1

STANDOFF, HOLD-DOWN

50

-

-

-

-

1

18023-9

SCR, SKT HD CAP M4 X 6.0

49

-

1

1

1

1

2119655-5

APPLICATOR BASIC ASSEMBLY, EF

46

-

1

-

1

1

2119369-1

RAM, AMP STYLE, END FEED

44

-

1

1

1

1

2079383-7

SCR, BHSC, RoHS (M8 X 25)

41

-

1

-

1

1

2119645-1

DISC, NUMBERED FA WIRE ADJUSTMENT

40

-

1

-

1

1

2119957-1

APPLICATOR SHIM PACK

39

-

1

1

1

1

1-2119644-2

RAM WASHER, PRECISION

38

-

1

1

1

1

2119085-1

FA HEAD, ATLANTIC STYLE

37

-

1

-

1

1

2119092-1

BOLT, ADJUSTMENT

35

-

8

8

8

8

1-18028-2

WASHER, FLAT, REG M4

33

-

2

2

2

2

2168083-9

SCR, SKT HD CAP, RoHS, M4 X 20

31

-

2

2

2

2

1-2168083-0

SCR, SKT HD CAP, RoHS, M4 X 10

29

-

1

1

1

1

240639-1

STRIPPER (MACHINING)

27

-

2

2

2

2

1320906-1

STUD, THREADED

25

-

1

1

1

1

1752371-1

PLATE, STRIP GUIDE

24

-

2

2

2

2

2-22281-3

SPRING, COMPRESSION

22

-

1

1

1

1

1752373-4

DRAG

20

-

1

1

1

1

1901696-3

STRIP GUIDE, REAR

19

-

1

1

1

1

1901695-3

STRIP GUIDE, FRONT

18

-

4

4

4

4

1-2079383-1

SCR, BHSC, RoHS (M6 X 12)

17

-

1

1

1

1

1-240641-5

SPACER

16

-

1

1

1

1

1752360-1

SPACER, HOLD-DOWN

13

-

1

1

1

1

240644-1

PLATE, REAR SHEAR

11

-

-

-

-

-

-

-

10

-

1

1

1

1

2-690482-7

PLATE, FRONT SHEAR

9

-

1

1

1

1

1-1333219-1

ANVIL, COMBINATION

8

-

1

1

1

1

1-2217206-1

BLADE, SLUG

7

-

1

1

1

1

1-240641-0

SPACER

5

-

1

1

1

1

238009-1

BLOCK, FL CRIMPER SPACER

4

-

1

1

1

1

2119582-3

CRIMPER, INSULATION F PREMIUM

3

-

1

1

1

1

455888-1

SPACER, CRIMPER

2

-

1

1

1

1

456408-6

CRIMPER, WIRE PREMIUM

1

-77

-7

-6

-5

-2

PART NO

DESCRIPTION

ITEM NO

13JAN2012

13JAN2012

13JAN2012

DWN
K. HUANG

CHK
S. XI

APVD
J. CRUZ

TE Connectivity
Harrisburg, PA 17105-3608

Ocean End Feed
Applicator

-

SIZE
A1

CAGE CODE
00779

DRAWING NO
©=2150041

RESTRICTED TO
-






Customer Accessible Production Drawing

SCALE
1:1


SHEET
1

OF
4

REV
A1

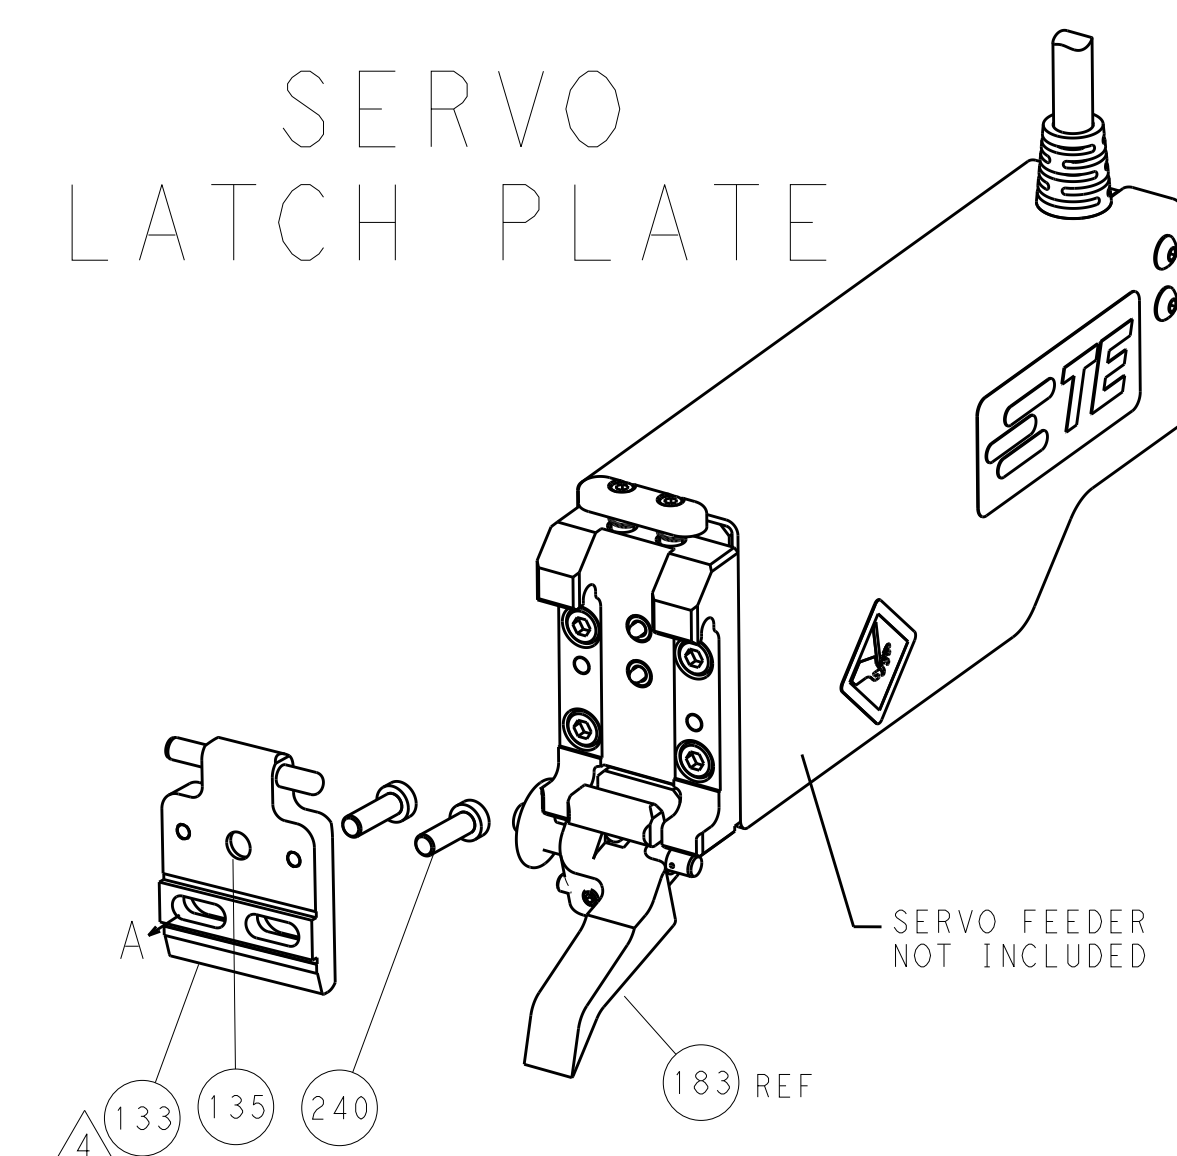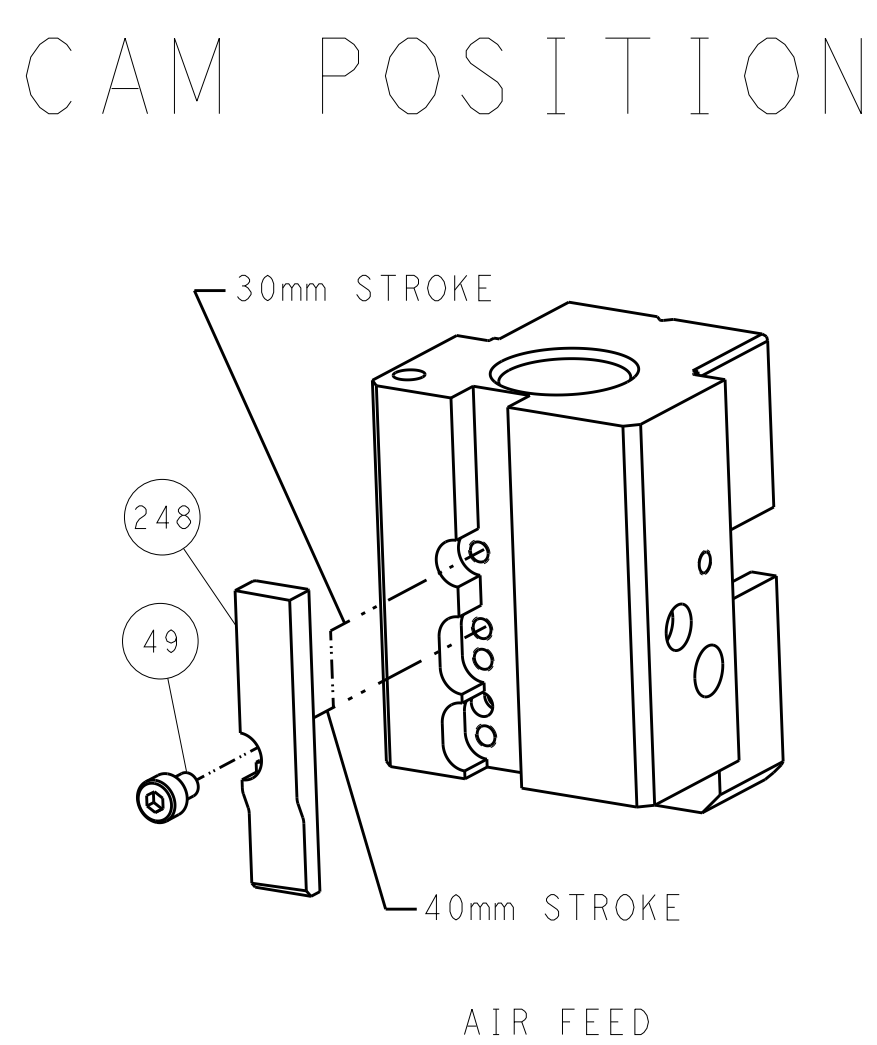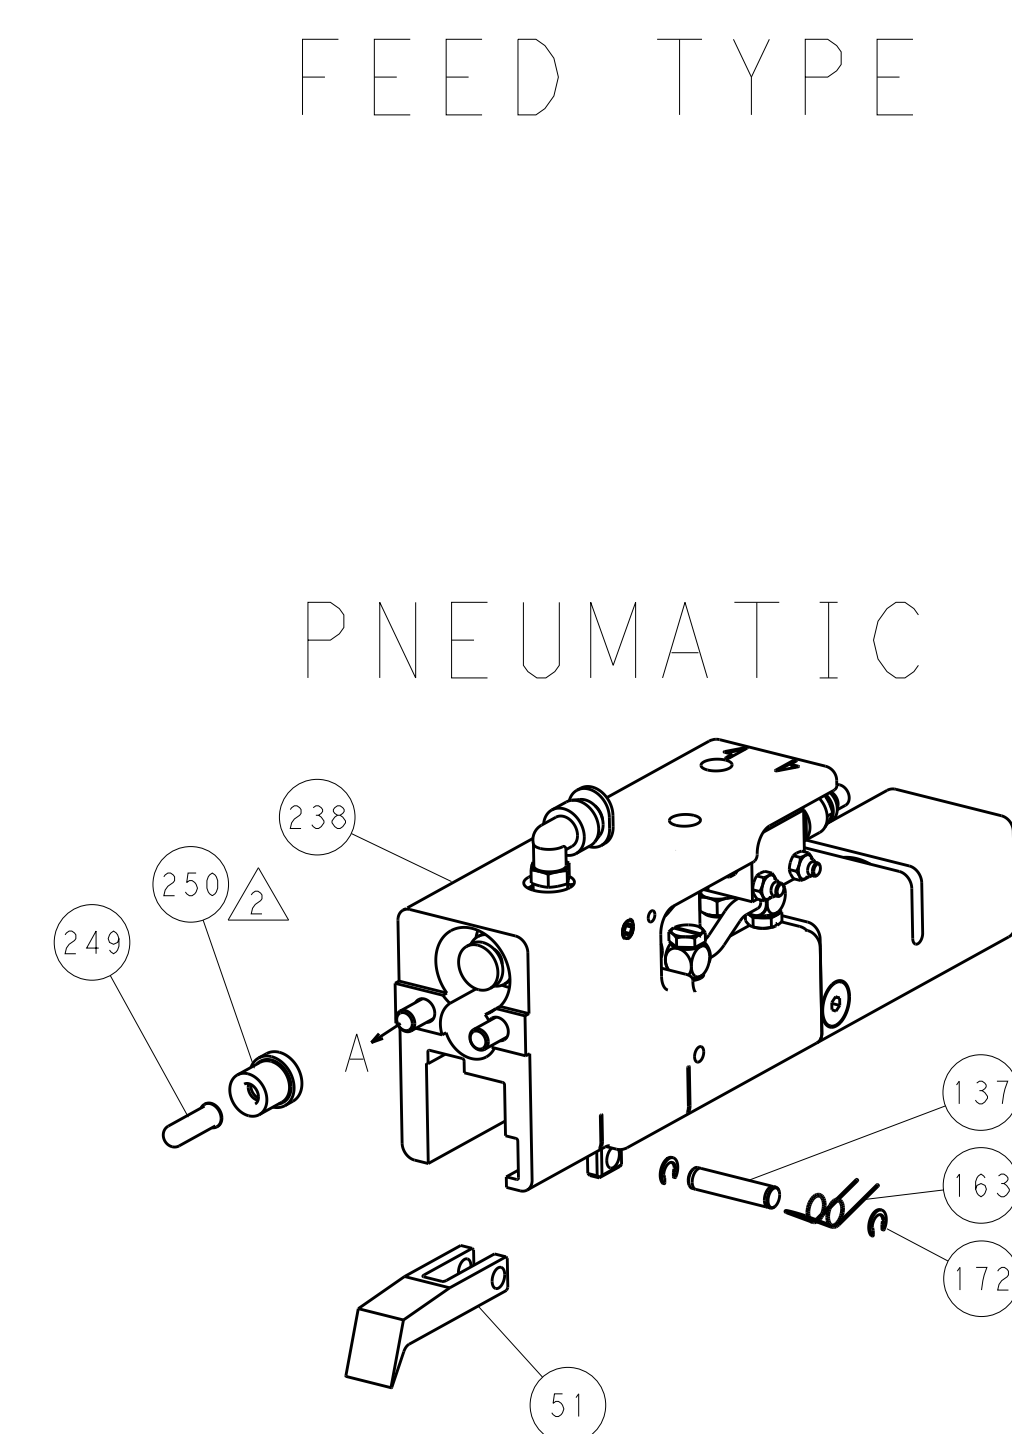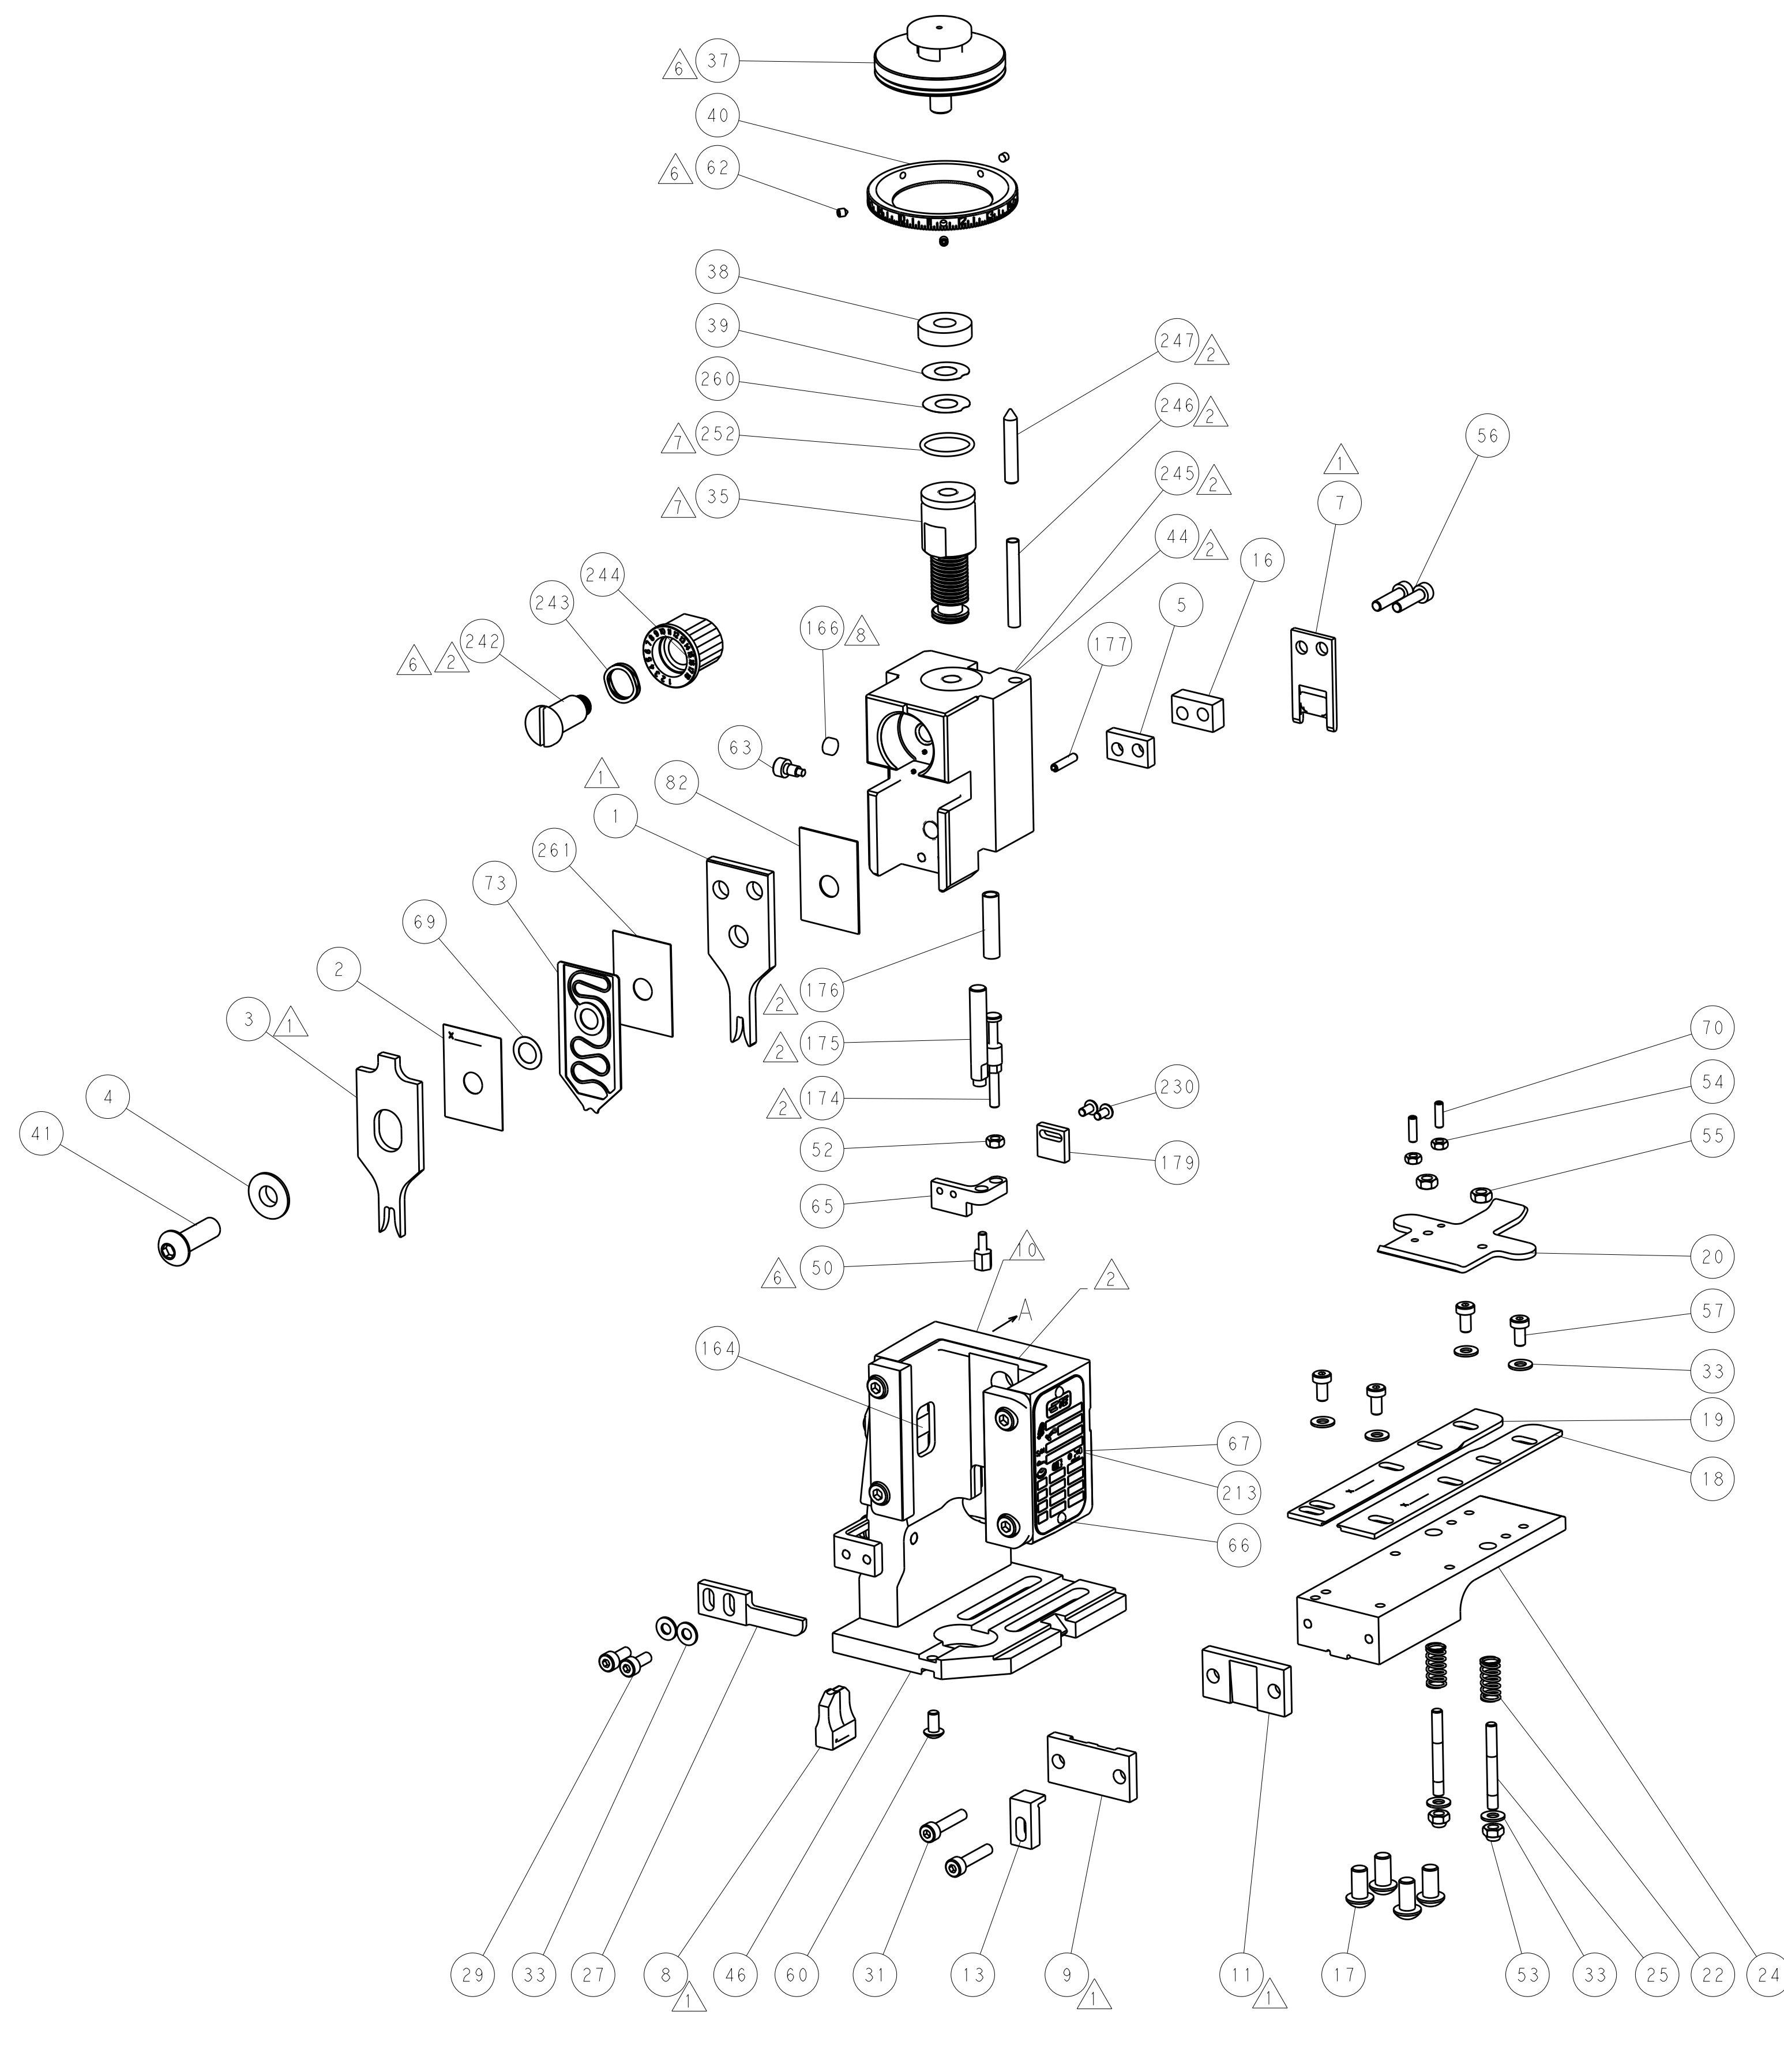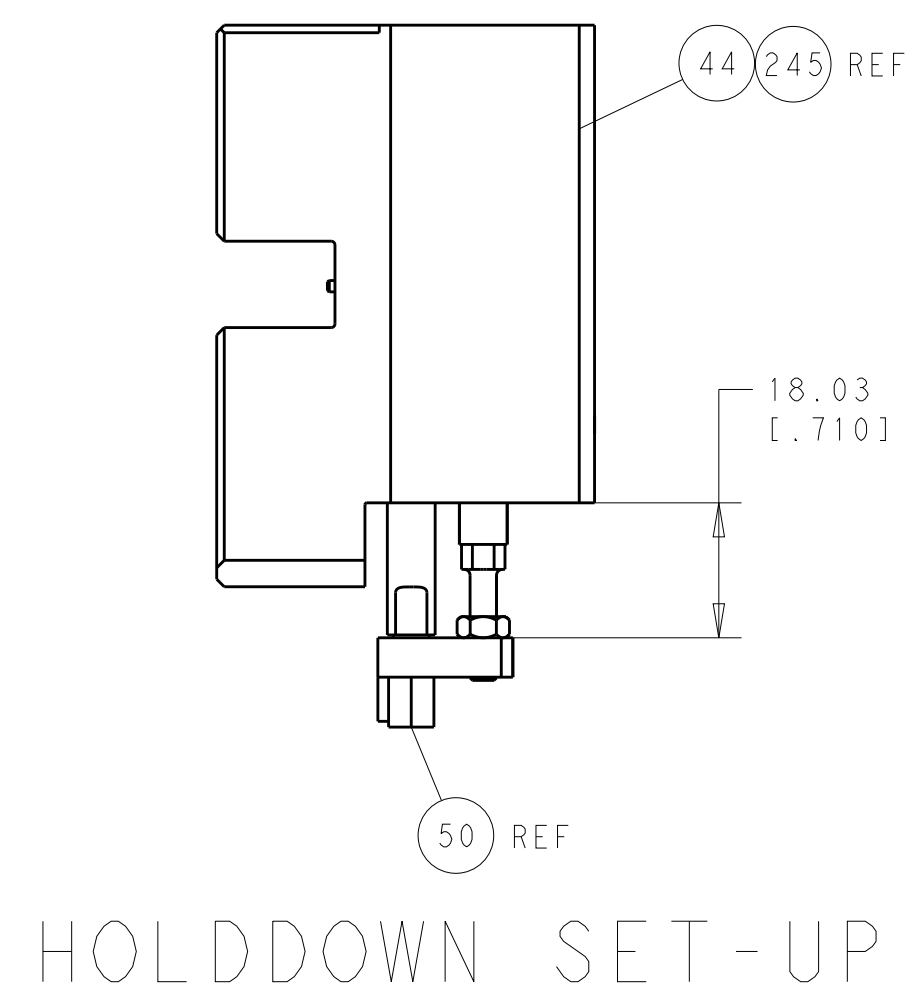

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

THIS DRAWING IS A PROPERTY OF THE COMPANY. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION HAS THE RIGHT TO BE CONSULTED FOR ANY CHANGES TO THIS DRAWING.		DWN K HUANG 13JAN2012		 TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS:		CHK S_XI 13JAN2012			
mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±.1 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES		APVD L CRUZ 13JAN2012 PRODUCT SPEC - APPLICATION SPEC -	
MATERIAL		FINISH		SIZE	
-		-		CAGE CODE	
		WEIGHT		DRAWING NO	
		-		A 00779	
Customer Accessible Production Drawing				C=2150041	
				RESTRICTED TO	
				-	
				SCALE 1:1	
				SHEET 2 of 4	
				REV A	

PACIFIC VERSION TERMINATOR INTERFACE ADAPTER	PART NUMBER	REVISION	DESCRIPTION	FEED TYPE	APPLICATOR STYLE CONVERSION CHART						
					CONVERT TO	PART NUMBERS REQUIRED					
	2-2150041-2	A	FINE CRIMP HEIGHT ADJUST	PNEUMATIC	-	-	-	-	-	-	-
					SERVO LATCH PLATE	2119951-1	1901697-1	8-2150041-5	-	-	2168400-7 (QUANTITY 2)
					SMART APPLICATOR	2161326-1	-	8-2150041-4	-	-	-
	2-2150041-5	A	FINE CRIMP HEIGHT ADJUST	SERVO LATCH PLATE 	-	-	-	-	-	-	-
					PNEUMATIC FEED	2119950-1	2119792-1	-	2119641-2	-	2063440-2
	2-2150041-7	A	FINE CRIMP HEIGHT ADJUST	NONE	-	-	-	-	-	-	-
	7-2150041-7	A	CRIMP TOOLING KIT	-	-	-	-	-	-	-	-

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	2.79 mm [.110]	F
INSUL	4.57 mm [.180]	F
APPL INSTRUCTIONS 408-10390		

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: 250 SERIES TAB WITH LATCH			
WIRE STRIP LENGTH 4.80-5.60 mm [.189-.220 IN]		INSULATION DIAMETER RANGE Ø2.10-3.40 mm [.083-.134 IN]	
TERMINAL APPLICATION SPECIFICATION	114-5052	-	-
TERMINALS APPLIED	△		
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
170030-1	170030-2	170030-3	170030-4
170030-5	170030-9	170340-1	170340-3
1-170340-3			

WIRE SIZE			CRIMP HEIGHT mm [INCH]		CRIMP HEIGHT REFERENCE SETTING
14 AWG OR 2.00mm2			1.68+/-0.05 [.066+/- .002]		6.8
1.50mm2			1.63+/-0.05 [.064+/- .002]		7.0
16 AWG OR 1.25mm2			1.55+/-0.05 [.061+/- .002]		8.1
18 AWG OR 0.85mm2			1.42+/-0.05 [.056+/- .002]		9.4



1. RECOMMENDED SPARE PARTS
2. GREASE BEARING SURFACES LIGHTLY
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2150041-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2150041-5
5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
6. APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 50, 62 & 242.
7. GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 153.
8. MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.
9. CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
10. TERMINAL PITCH NOT COMPATIBLE WITH MECHANICAL FEED.

-	1	1	1	455888-3	SPACER, CRIMPER	261
-	1	1	1	2119782-1	FINE ADJUST HEAD ASM, PACIFIC STYLE	251
-	-	-	1	2119640-1	PUSH ROD, AIR FEED	250
-	-	-	1	2079988-1	BUSHING, LCH5-12, MISUMI	249
-	1	1	1	1-22279-3	SPRING, COMPRESSION	246
-	1	1	1	2119082-9	CAM, SNAIL, INSULATION ADJUSTMENT	244
- 77-27-25-22	PART NO				DESCRIPTION	ITEM NO

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

SET UP GAUGE 2119599-2				LOC A	DIST 66	REVISIONS				
				P	LTR	DESCRIPTION	DATE	OWN	APVD	
					-	SEE SHEET 1	-	-	-	
1	1	1		2079764-1		WASHER, WAVE SPRING, CREST-TO-CREST			243	
1	1	1		2119083-1		RETAINER, INSULATION DIAL			242	
-	2	-		2168400-7		SHCS, LOW HEAD, RoHS, M5 X 10			240	
-	-	1		2063440-2		AIR FEED MODULE			238	
2	2	2		1-2079383-0		SCR, BHSC, RoHS (M3 X 6)			230	
-	1	-		2119740-2		TAG,IDENTIFICATION			21	
4	4	4		2079383-9		SCR, BHSC, RoHS (M6 X 20)			186	
-	REF	-		1901697-1		FEED FINGER ASSEMBLY,EF			183	
1	1	1		1-1976053-7		LOCATER BLOCK,TERMINAL			179	
1	1	1		6-993111-6		PIN, SLOTTED SPRING 3.0 X 14.0			177	
1	1	1		8-22280-7		SPRING, COMPRESSION			176	
1	1	1		1752353-2		GUIDE PIN,HOLDDOWN			175	
1	1	1		1901680-2		GUIDE PIN,HOLDDOWN			174	
-	-	2		21045-3		RING, RETAIN, EXTERN, 3/16 CRESCENT			172	
1	1	1		994969-1		MAGNET, RARE EARTH HIGH ENERGY			166	
REF	REF	REF		994970-2		COUNTER, MAGNETIC			164	
-	-	1		240638-1		SPRING, FEED FINGER			163	
1	1	1		8-21084-1		O-RING, .801 ID, .070 DIA. MAT.			153	
-	-	1		2119641-2		FEED CAM, AIR FEED			152	
1	1	1		2119798-2		DETENT PIN			145	
1	1	1		2079383-8		SCR, BHSC, RoHS (M4 X 16)			144	
-	-	-		2119653-2		FEED CAM, POST FEED			142	
1	1	1		2119655-6		APPLICATOR BASIC ASSEMBLY, EF			141	
1	1	1		2119651-1		RAM, ASIAN STYLE, END FEED			140	
1	1	1		2119092-2		BOLT, ADJUSTMENT			139	
-	-	1		3-23627-7		PIN, RETAIN, GRVD, 3/16 X .854			137	
-	REF	-		SEE NOTE 4		MEMORY CHIP, PROGRAMMED			135	
-	1	-		1633743-1		SERVO FEED LATCH ASM			133	
1	1	1		455888-5		SPACER, CRIMPER			82	
1	1	1		2119791-9		DEPRESSOR, WIRE			73	
1	1	1		2119956-2		DOCUMENTATION PACKAGE			71	
2	2	2		2-18032-2		SCR, SET, FLT POINT M3 X 10.0			70	
1	1	1		2119943-1		WASHER, SPACER			69	
1	-	1		2119740-1		TAG,IDENTIFICATION			67	
2	2	2		2168078-1		SCREW, DRIVE, RH, RoHS, 2 x .188			66	
1	1	1		1-1901681-5		HOLDDOWN, TERMINAL			65	
1	1	1		2119793-1		LIMITER, ADJUSTMENT BOLT			63	
3	3	3		992763-5		SCR, SET, SOC, CONE POINT, M3 x 4.0			62	
4	4	4		2168400-4		SHCS, LOW HEAD, RoHS, M4 X 8			57	
2	2	2		2168083-8		SCR, SKT HD CAP, RoHS, M4 X 16			56	
2	2	2		5018030-2		NUT, HEX, REG, RoHS, M4			55	
2	2	2		5018030-1		NUT, HEX, REG, RoHS, M3			54	
2	2	2		986965-8		NUT, LOCK, HEX, TORQUE (M4)			53	
1	1	1		1-5018030-0		NUT, HEX, REG, RoHS, M3.5			52	
-	-	1		2119792-2		PAWL, EF, AIR			51	
1	1	1		1-1752354-1		STANDOFF,HOLD-DOWN			50	
-	-	1		18023-9		SCR, SKT HD CAP M4 X 6.0			49	
1	1	1		2079383-7		SCR, BHSC, RoHS (M8 X 25)			41	
1	1	1		2119645-1		DISC, NUMBERED FA WIRE ADJUSTMENT			40	
1	1	1		2119957-1		APPLICATOR SHIM PACK			39	
1	1	1		1-2119644-2		RAM WASHER, PRECISION			38	
8	8	8		1-18028-2		WASHER, FLAT, REG M4			33	
2	2	2		2168083-9		SCR, SKT HD CAP, RoHS, M4 X 20			31	
2	2	2		1-2168083-0		SCR, SKT HD CAP, RoHS, M4 X 10			29	
1	1	1		240639-1		STRIPPER (MACHINING)			27	
2	2	2		1320906-1		STUD, THREADED			25	
1	1	1		1752371-1		PLATE, STRIP GUIDE			24	
2	2	2		2-22281-3		SPRING, COMPRESSION			22	
1	1	1		1752373-4		DRAW			20	
1	1	1		1901696-3		STRIP GUIDE, REAR			19	
1	1	1		1901695-3		STRIP GUIDE, FRONT			18	
1	1	1		1-240641-5		SPACER			16	
1	1	1		1752360-1		SPACER,HOLD-DOWN			13	
1	1	1		240644-1		PLATE, REAR SHEAR			11	
-	-	-		-		-			10	
1	1	1		2-690482-7		PLATE, FRONT SHEAR			9	
1	1	1		1-1333219-1		ANVIL, COMBINATION			8	
1	1	1		1-2217206-1		BLADE, SLUG			7	
1	1	1		1-240641-0		SPACER			5	
1	1	1		238009-1		BLOCK, FL CRIMPER SPACER			4	
1	1	1		2119582-3		CRIMPER, INSULATION F PREMIUM			3	
1	1	1		455888-1		SPACER, CRIMPER			2	
1	1	1		456408-6		CRIMPER, WIRE PREMIUM			1	
7-27-25-22	PART NO				DESCRIPTION				ITEM NO	

THIS DRAWING IS A CONTROLLED DOCUMENT FOR THE ELECTRONIC CONNECTION TEST. IT IS DESIGNED TO BE USED IN CONJUNCTION WITH THE ELECTRICAL CONNECTION DRAWING. THESE TWO DRAWINGS MUST BE USED IN CONJUNCTION WITH THE CONNECTION SHOULD BE CONTACTED FOR THE LATEST REVISION.		OWN 13JAN2012 K. HUANG CHK 13JAN2012 S. XI APVD 13JAN2012 CRUZ		 TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME Ocean End Feed Applicator	
		PRODUCT SPEC - APPLICATION SPEC -		SIZE CASE CODE DRAWING NO A1 00779 C=2150041	
MATERIAL -		FINISH -		RESTRICTED TO -	
Customer Accessible Production Drawing				SCALE 1:1 SHEET 3 OF 4 REV. A1	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9