

### Data Sheet

**Total Power:** 15 Watts  
**Input Voltage:** 12 V, 24 V or 48 V  
**# of Outputs:** Single, Dual

### SPECIAL FEATURES

- Encapsulated
- 4:1 input range
- 1" x 2" package
- 1500 Vdc I/O isolation
- Single and Dual output

### SAFETY

- UL 60950-1
- CE Mark



### Electrical Specifications

Input	
Input range:	9 to 36 VDC; 18 to 75 VDC
Efficiency <sup>2</sup> :	84% @ 12 Vo
Output	
Voltage tolerance:	±2.0%
Line regulation:	±0.5%
Load regulation:	Single output: ±1.0% Dual output: ±TBD%
Noise/ripple:	3.3 Vo: 100 mV 5.0 Vo: 100 mV 12 Vo: 120 mV 15 Vo: 120 mV
Short circuit protection:	Auto-restart
Switching frequency:	300 KHz
Temperature coefficient:	±0.02 /°C
Isolation	
I/O isolation:	1500 VDC min.
Insulation resistance:	10 Mohm
Insulation capacitance:	1000 pF typical

### Environmental Specifications

<b>Operating ambient temperature range:</b>	-40°C to +71°C (no derating)
<b>Storage temperature:</b>	-55 °C to +105 °C
<b>Humidity:</b>	5% to 95% (non-condensing)
<b>MTBF:</b>	>1 Million hours
<b>RoHS Compliant</b>	RoHS-6


### Ordering Information

Model Number	Input Voltage	Output 1 Voltage	Output 2 Voltage	Maximum Power
AEE04F18-LS	9 - 36 V	3.3 V @ 4 A		13.2 W
AEE03A18-LS	9 - 36 V	5 V @ 3 A		15 W
AEE01B18-LS	9 - 36 V	12 V @ 1.25 A		15 W
AEE01C18-LS	9 - 36 V	15 V @ 1 A		15 W
AEE01AA18-LS	9 - 36 V	5 V @ 1.5 A	-5 V @ 1.5 A	15 W
AEE00BB18-LS	9 - 36 V	12 V @ 0.625 A	-12 V @ 0.625 A	15 W
AEE00CC18-LS	9 - 36 V	15 V @ 0.5 A	-15 V @ 0.5 A	15 W
AEE04F36-LS	18 - 75 V	3.3 V @ 4 A		13.2 W
AEE03A36-LS	18 - 75 V	5 V @ 3 A		15 W
AEE01B36-LS	18 - 75 V	12 V @ 1.25 A		15 W
AEE01C36-LS	18 - 75 V	15 V @ 1 A		15 W
AEE01AA36-LS	18 - 75 V	5 V @ 1.5 A	-5 V @ 1.5 A	15 W
AEE00BB36-LS	18 - 75 V	12 V @ 0.625 A	-12 V @ 0.625 A	15 W
AEE00CC36-LS	18 - 75 V	15 V @ 0.5 A	-15 V @ 0.5 A	15 W

Please contact Artesyn Embedded Technologies for information on other output voltages, power ranges and configurations. Available in RoHS 6 version only.


### Mechanical Drawings

#### Single Output

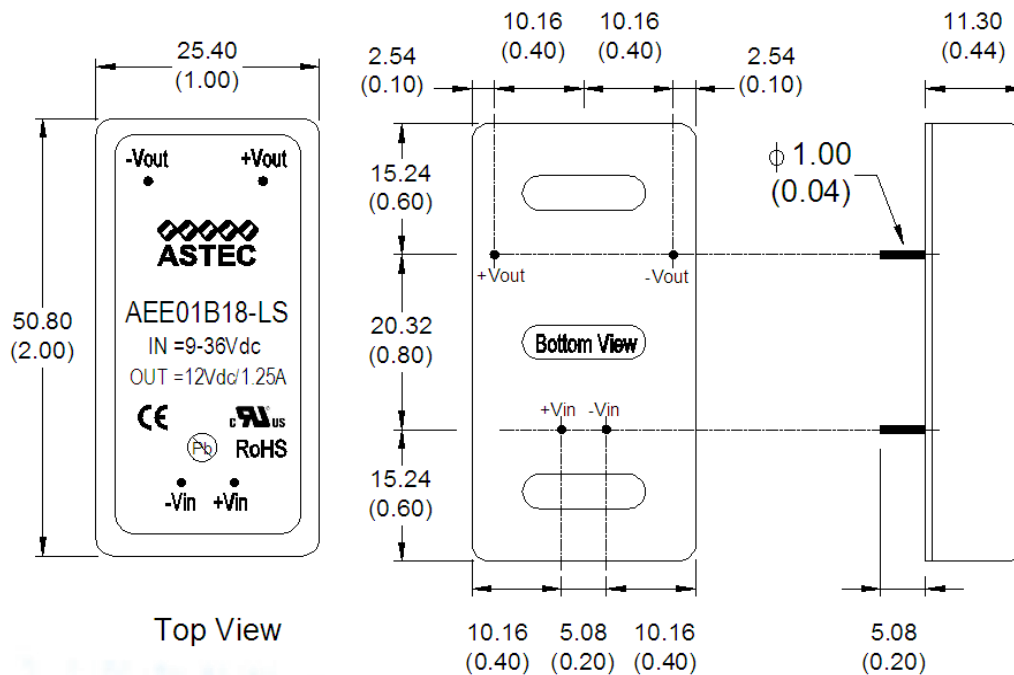

## Mechanical Drawings

### Dual Output

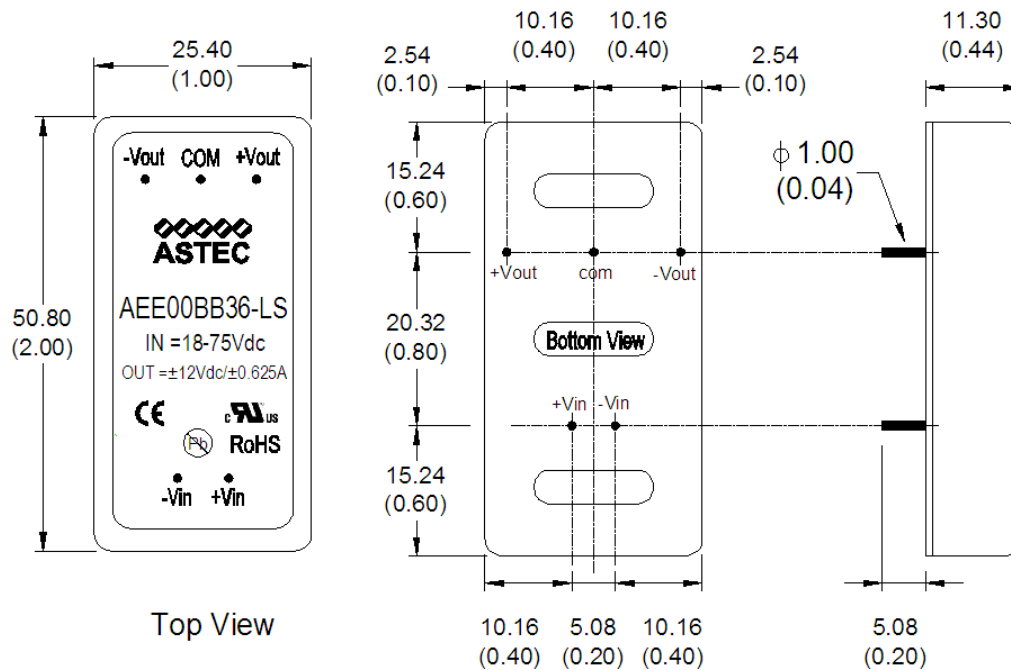

**Notes:**

1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 1 yr
3. Label and logo appearance may vary from what is shown on mechanical drawings.

## WORLDWIDE OFFICES

### Americas

2900 S.Diablo Way  
 Tempe, AZ 85282  
 USA  
 +1 888 412 7832

### Europe (UK)

Waterfront Business Park  
 Merry Hill, Dudley  
 West Midlands, DY5 1LX  
 United Kingdom  
 +44 (0) 1384 842 211

### Asia (HK)

14/F, Lu Plaza  
 2 Wing Yip Street  
 Kwun Tong, Kowloon  
 Hong Kong  
 +852 2176 3333



[www.artesyn.com](http://www.artesyn.com)

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2014 Artesyn Embedded Technologies, Inc.

For more information: [www.artesyn.com/power](http://www.artesyn.com/power)  
 For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9