

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0760650001

Status:

Obsolete

Overview:

sfp_stacked_multiport_connectors

Description:

Small Form-factor Pluggable Plus (SFP+) Stacked 2-by-2 Multi-Port Press Fit Connector without Lightpipe Ports, EMI Metal Gasket, 80 Circuits, Tin (Sn)/Lead(Pb) Tails

Documents:

Drawing (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

I/O Connectors

Series

76065

Application

Module-to-Board

Component Type

Receptacle

Overview

sfp_stacked_multiport_connectors

Product Name

SFP Plus

Type

N/A

Physical

Boot Color

N/A

Circuits (Loaded)

80

Circuits (maximum)

80

Circuits Detail

80

Color - Resin

Black

Durability (mating cycles max)

100

Flammability

94V-0

Gender

Female

Keying to Mating Part

None

Lock to Mating Part

Yes

Material - Metal

High Performance Alloy (HPA)

Material - Plating Mating

Gold

Material - Plating Termination

Tin-Lead

Material - Resin

High Temperature Thermoplastic

Number of Rows

2

Orientation

Right Angle

PC Tail Length (in)

0.081 In

PC Tail Length (mm)

2.07 mm

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness Recommended (in)

0.062 In

PCB Thickness Recommended (mm)

1.57 mm

Packaging Type

Tray

Panel Mount

No

Pitch - Mating Interface (in)

0.031 In

Pitch - Mating Interface (mm)

0.80 mm

Pitch - Term. Interface (in)

0.031 In

Pitch - Term. Interface (mm)

0.80 mm

Plating min: Mating (µin)

30.4

Plating min: Mating (µm)

0.76

Plating min: Termination (µin)

30.4

Plating min: Termination (µm)

0.76




image - Reference only

Series

EU RoHS

RoHS Compliant by Exemption

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Halogen-Free

China RoHS



Pb

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

76065Series

Use With

0759510999 SFP Dust Plug,

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global	
Description	Product #
SFP Stacked Multi-Port Insertion Tool, 2 by 2	0622029970
SFP Stacked Multi-Port Extraction Tool, 2 by 2	0622029975

Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	4
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Through Hole - Compliant Pin
Waterproof / Dustproof	No

Electrical

Current - Maximum per Contact	0.5A
Grounding to Panel	None
Shield Type	EMI Gasket
Shielded	Yes
Voltage - Maximum	120V AC (RMS)/DC

Material Info




Reference - Drawing Numbers

Application Specification	AS-75310-001
Packaging Specification	PK-75714-001
Product Specification	PS-75310-001
Sales Drawing	SD-76065-001

This document was generated on 06/04/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

PART NUMBER	COMPLIANT TAIL PLATING
760650001	TIN / LEAD
760655001	TIN

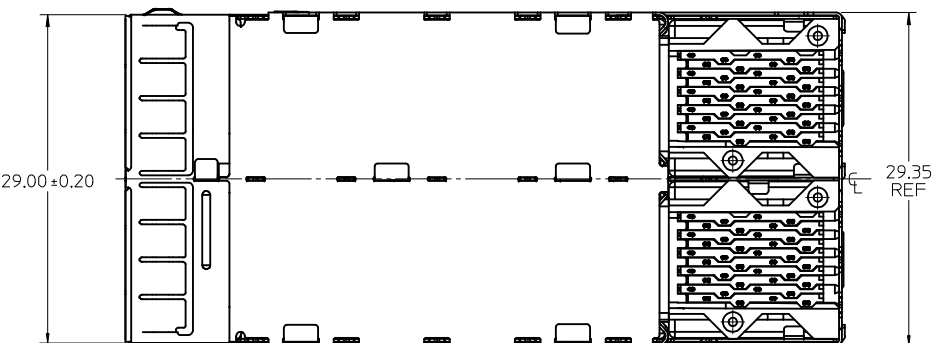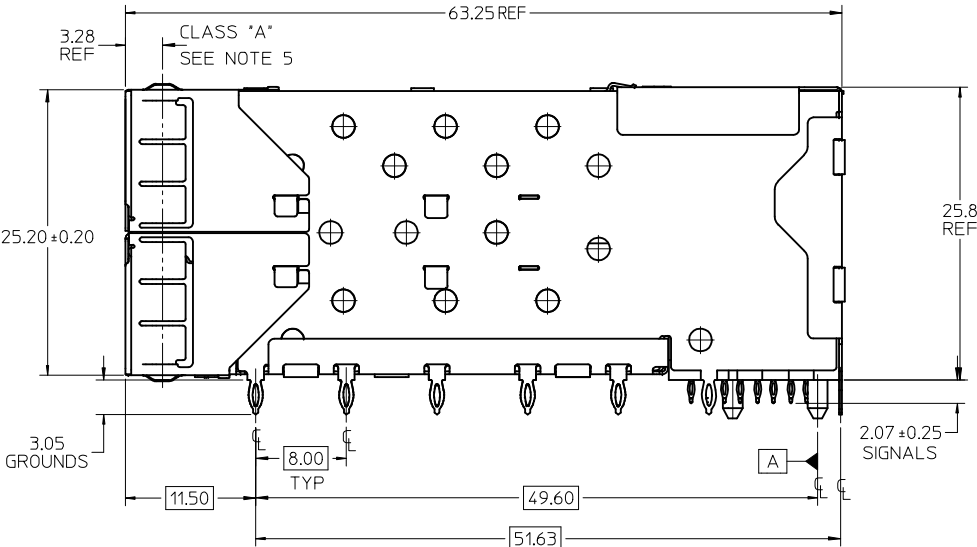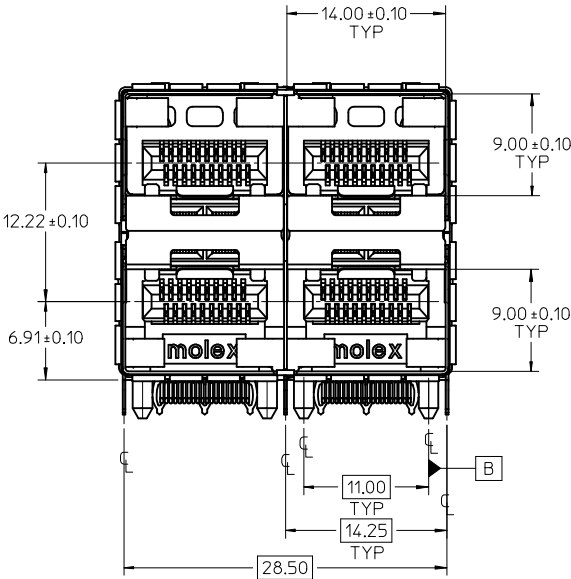

NOTES

1. MATERIAL:

CAGE: NICKEL SILVER, THICKNESS: 0.25mm

EMI METAL GASKET: PHOS-BRONZE

CONNECTOR HOUSING: GLASS FILLED HIGH TEMP PLASTIC, 94 V-0

COLOR BLACK

OVERMOLDED TERMINALS HOUSING: GLASS FILLED HIGH TEMP PLASTIC, 94 V-0, COLOR: BLACK

TERMINALS: TIN BRASS

2. FINISH:

LIGHT PIPE HOUSING: 150 MICRONS NICKEL OVER 150 MICRONS COPPER

TERMINAL: CONTACT AREA: 0.76 MICRONS MIN, HARD GOLD OVER 1.27 MICRONS MIN. NICKEL.

COMPLIANT TAIL - TIN/LEAD OPTION: 0.76 - 1.52 MICRONS 90/10 TIN/LEAD OVER 0.76 - 1.52 MICRONS NICKEL

COMPLIANT TAIL - TIN OPTION: 0.76 - 1.52 MICRONS TIN OVER 0.76 - 1.52 MICRONS NICKEL

EMI METAL GASKET: 2.54 MICRONS NICKEL OVERALL

3. REFER TO PS-75310-001 PRODUCT SPEC FOR ALL ELECTRICAL, MECHANICAL, AND ENVIRONMENTAL SPECIFICATIONS.

4. REFER TO PK-75714-001 FOR ALL PACKAGING SPECIFICATIONS.

5. ALL EXTERIOR SURFACES TO BE CLASS 'B' SURFACE EXCEPT THE UNDER SIDE OF THE CAGE WHERE THE PCB WOULD BE LOCATED AND AS NOTED. THE SURFACES TO CONFORM TO THE MOLEX COSMETIC DOC PS-45499-002.

ADD KEEP-OUT ZONES

EC NO: UCP2009-1356

DRWN:MSI BARRA 2009/08/04

CHKD:BBARKER 2009/08/06

APPR:SMILLER 2009/08/06

REV

DESCRIPTION

QUALITY SYMBOLS

GENERAL TOLERANCES (UNLESS SPECIFIED)

DIMENSION STYLE

SCALE

DESIGN UNITS

THIRD ANGLE PROJECTION

TITLE

MOLEX INCORPORATED

DOCUMENT NO.

SHEET NO.

mm	INCH
4 PLACES ± ---	± ---
3 PLACES ± ---	± ---
2 PLACES ± 0.13	± ---
1 PLACE ± 0.25	± ---
ANGULAR ± 5 °	

DRAFT WHERE APPLICABLE

MUST REMAIN



WITHIN DIMENSIONS

SEE CHART

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SD-76065-001

1 OF 4

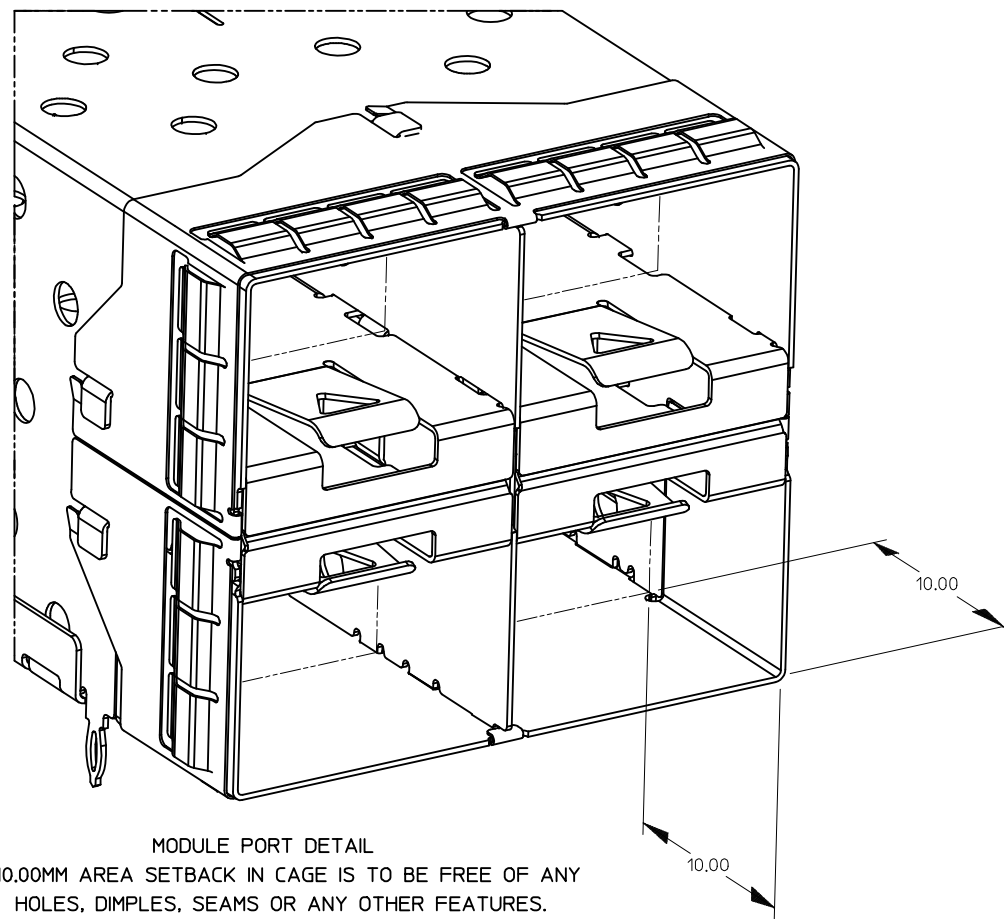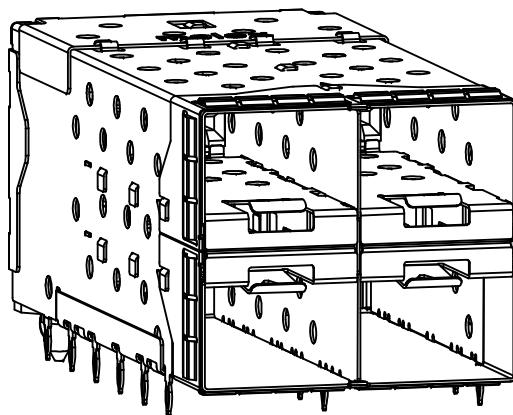


MODULE PORT DETAIL
10.00MM AREA SETBACK IN CAGE IS TO BE FREE OF ANY
HOLES, DIMPLES, SEAMS OR ANY OTHER FEATURES.
(4 SIDES PER MODULE PORT)


SEE SHEET 1	REV	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 3:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	TITLE STACKED SFP+ 2X2 ASS'Y WITH METAL EMI GASKET		
						DRAWN BY MSANDBERG		DATE 10-23-06					
						CHECKED BY JLONG		DATE 10-23-06					
						APPROVED BY RNELSON		DATE 10-23-06	MOLEX MOLEX INCORPORATED				
						MATERIAL NO.		DOCUMENT NO.				SHEET NO.	
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-76065-001				2 OF 4	
						SIZE							

T20 T18 T16 T14 T12
 T19 T17 T15 T13 T11
 T1 T3 T5 T7 T9
 T2 T4 T6 T8 T10
 L10 L8 L6 L4 L2
 L9 L7 L5 L3 L1
 L11 L13 L15 L17 L19
 L12 L14 L16 L18 L20


CONNECTOR PIN-OUT
 COMPONENT SIDE OF BOARD

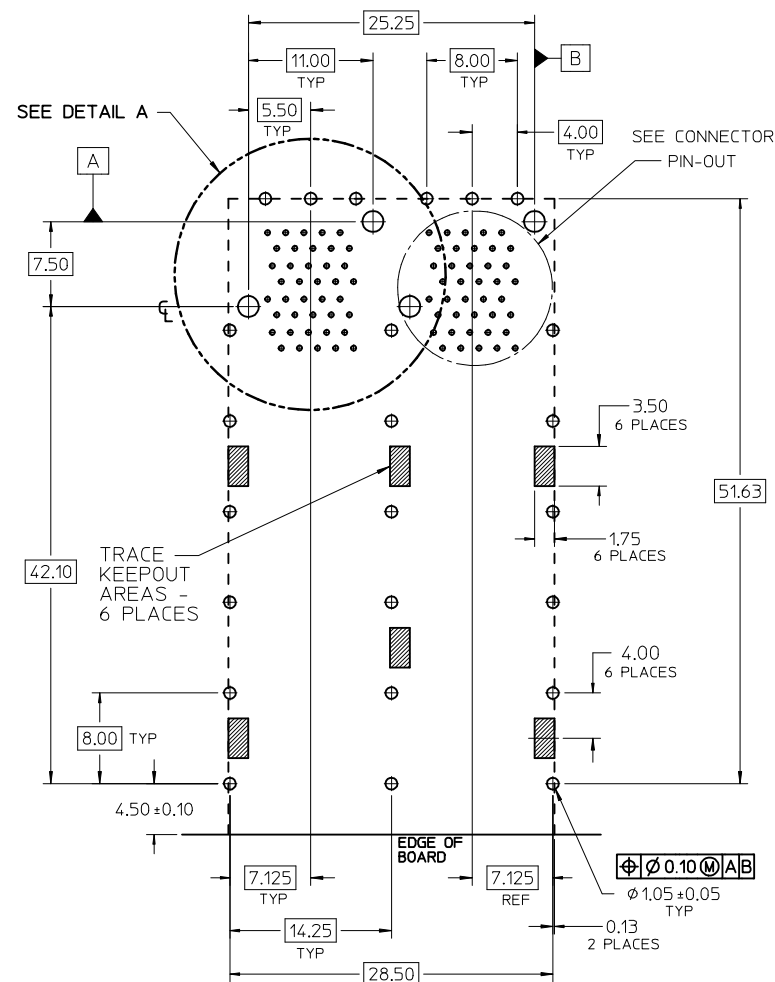


RECOMMENDED PCB LAYOUT - COMPONENT SIDE
 RECOMMENDED PCB THICKNESS - 2.36 MM (.093 INCH)
 THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT
 TO BE CONSIDERED THE KEEP OUT AREA FOR COMPONENTS
 THIS AREA IS INDICATED BY THE DASHED LINE

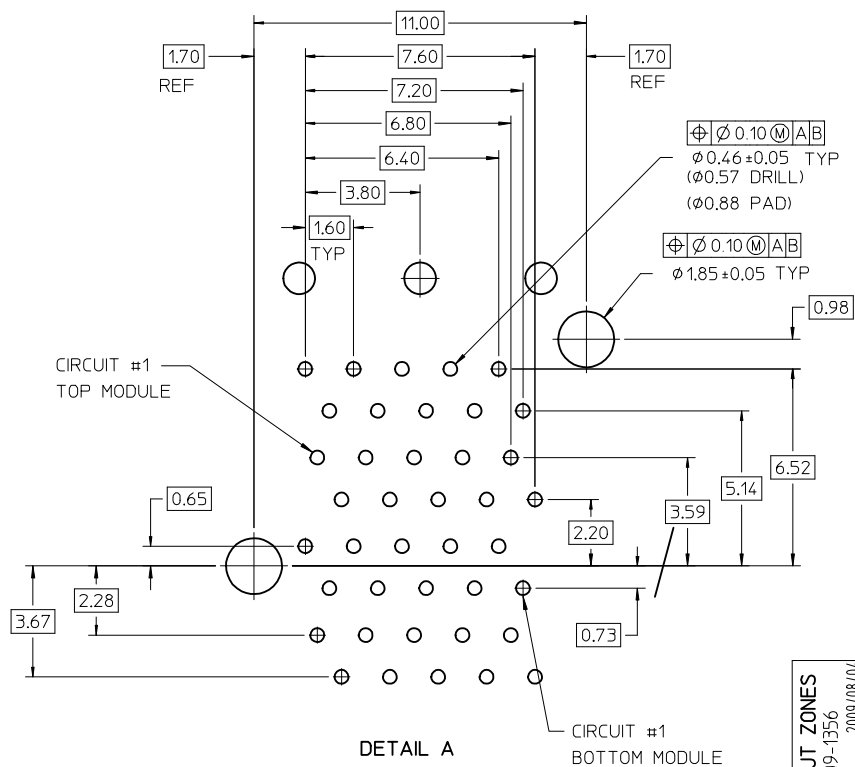

ADD KEEP-OUT ZONES EC NO: UCP2009-1356 DRWN:MSI BARRA 2009/08/04 CHKD:BBARKER 2009/08/06 APPR:SMILLER 2009/08/06	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 3:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
						DRAWN BY MSANDBERG		DATE 10-23-06	STACKED SFP+ 2X2 ASS'Y WITH METAL EMI GASKET				
						CHECKED BY JLONG		DATE 10-23-06					
						APPROVED BY RNELSON		DATE 10-23-06	MOLEX MOLEX INCORPORATED				
						MATERIAL NO.		DOCUMENT NO.					SHEET NO.
						SEE CHART		SD-76065-001		3 OF 4			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

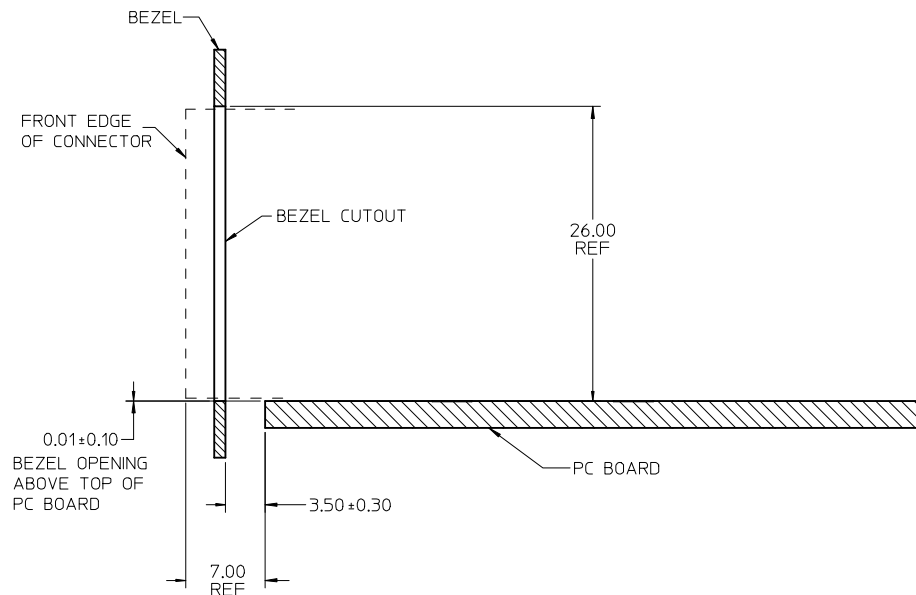

SECTION A-A

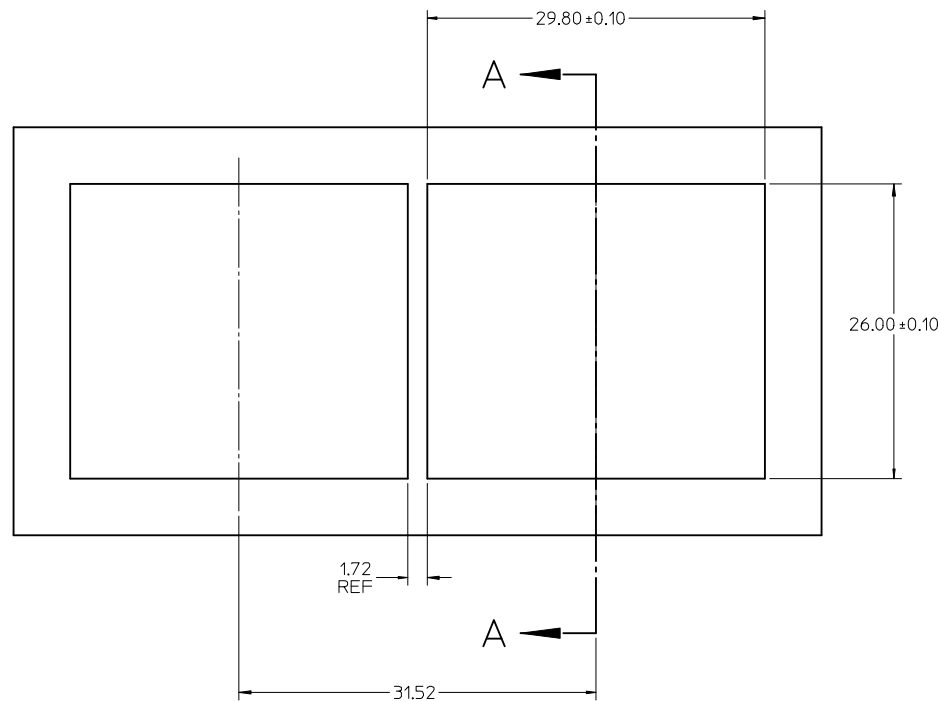

BEZEL CUT-OUT CENTER SPACING DETAIL
BEZEL THICKNESS: 0.8 - 2.6

SEE SHEET 1 EC NO: UCP2009-1356 2009/08/04 DRAWN:MSI BARRA 2009/08/06 CHKD:BBARKER 2009/08/06 APPR:SMILLER	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 3:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	STACKED SFP+ 2X2 ASS'Y WITH METAL EMI GASKET
					DRAWN BY MSANDBERG	DATE 10-23-06	TITLE			
			4 PLACES	± ---	± ---	CHECKED BY JLONG	DATE 10-23-06			
			3 PLACES	± ---	± ---	APPROVED BY RNELSON		DATE 10-23-06		
			2 PLACES	± 0.13	± ---	MATERIAL NO.		DOCUMENT NO.		
			1 PLACE	± 0.25	± ---	SEE CHART		SD-76065-001		
			ANGULAR ± 5 °		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS							

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9