

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2007

© COPYRIGHT 2007

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

PART NUMBER

REV

FIRST USED

POWER UNIT

FEED TYPE

567750-1

D

354500-3

LEADMAKER

MECHANICAL-POST FEED

1

RECOMMENDED SPARE PARTS.

2

GREASE LIGHTLY.

3

AFTER ASSEMBLY OF APPLICATOR, PROPER SPRING PRESSURE (ITEM 34) CAN BE OBTAINED BY TIGHTENING SET SCREW (ITEM 105) UNTIL CONTACT IS MADE WITH SPACER (ITEM 32) THEN TIGHTEN AN ADDITIONAL 5 1/2-6 REVOLUTIONS.

4

DO NOT EXCEED 80 CRIMPS PER MINUTE WITH THIS APPLICATOR.

5

APPLY LOCTITE 222.

LOC

DIST

REV

LTR

DESCRIPTION

DATE

DWN

APVD

A

66

D

ECR-07-006533

27MAR2007

BW

TE

1

-

240626-1

SHAFT-PIVOT AMP-O-MATOR

68

1

-

240633-1

BUSHING

67

1

-

240630-1

LEVER, INTERMEDIATE

66

1

-

1804317-1

BLOCK, PIVOT

65

1

-

1633286-1

SCREW, ADJUSTMENT

64

1

-

240659-3

PIN, CAM ROLLER

63

1

-

240658-1

ROLLER-CAM

62

1

-

240631-1

ROD, FEED

61

1

-

768623-1

MODIFIED CAP ASSEMBLY

59

1

-

768680-1

HOUSING, MODIFIED

58

1

-

240624-1

PIN, FEED FINGER

55

1

-

691499-1

SPRING-FEED FINGER

54

1

-

454568-2

FINGER, FEED

53

1

-

240634-1

LEVER, TERMINAL FEED

52

1

-

22353-8

SCR, SHLD, SLOT HD, 3/16 DIA

50

1

-

3-21002-5

SCR, BTN SKT HD CAP 1/4-20 X .750

49

1

-

238015-1

CAM, POST FEED 1 5/8

47

1

-

690578-1

INSULATION ADJUST BLOCK

46

1

-

690191-1

PLUG,NYLON

45

1

-

856807-1

RAM, SPECIAL

44

1

-

690125-1

SHIM SUB-ASSY

43

1

-

1-690124-1

WASHER, RAM (.150)

42

1

-

23241-6

BALL, STEEL

40

1

-

690170-1

SPRING, COMPRESSION

39

1

-

690142-1

DISC, INSULATION

38

1

-

354777-1

WIRE DISC, ASSEMBLY

37

1

-

22480-5

WASHER, WAVE SPRING

36

1

-

690212-1

POST, RAM

35

1

-

3-23846-5

SPRING, DIE

34

1

-

690573-1

SPACER, SPRING

32

1

-

454569-1

MOUNT, DRAG

31

1

-

1-22354-8

STUD, THREADED

30

1

-

21030-2

PIN, DOWEL .1250 X .500

29

1

-

690582-1

PIN, HINGE

28

1

-

768624-1

PLATE, BASE, COM

26

1

-

856801-1

MODIFIED HINGE BAR

25

1

-

690571-1

STABILIZER

24

1

-

690585-1

BLOCK, SPRING PRESSURE

23

1

-

1-22282-3

SPRING, COMPRESSION

22

1

-

21030-6

PIN, DOWEL .1250 X 1.000

21

1

-

454570-1

DRAG, STOCK

20

1

-

454573-1

GUIDE, STRIP, REAR

19

1

-

454571-2

GUIDE, FRONT STRIP

18

1

-

1804319-1

GUIDE, FEED ROD

17

1

-

4-22284-9

SPRING, COMPRESSION

16

1

-

853498-1

MAGNET ASSEMBLY

14

1

-

692134-7

TERMINAL POSITIONER

13

1

-

5-22280-5

SPRING, COMPRESSION

12

1

-

454712-5

PLATE, REAR SHEAR

11

1

-

683641-1

ANVIL, INSERT

10

1

-

690569-2

PLATE, SHEAR, FRONT

9

1

-

856804-1

ANVIL, COM, 2-AXIS

8

1

-

454575-6

BLADE, SHEAR

7

1

-

856802-1

PLATE, ANVIL RETAINING

5

1

-

690574-1

SPACER, TUBULAR

4

1

-

690764-1

INSULATION CRIMPER

3

1

-

681153-1

SPACER, CRIMPER

2

1

-

690716-3

CRIMPER, WIRE PREMIUM

1

-1

U/M

PART NO

DESCRIPTION

ITEM NO

TERMINAL NAME: FLAG, FASTON, .187 SERIES

62817

-

-

AMP TERMINAL - AMP CRIMP SPECS

-

-

-

-

-

-

PAD LTR

CRIMP HEIGHT

WIRE SIZE

Ø SOLDER

-

-

-

A

.040±.002

16

-

-

-

-

B

.037±.002

18 OR (2)20

-

-

-

-

C

.035±.002

20

-

-

-

-

D

-

-

-

-

-

-

CRIMP

SIZE

TYPE

RANGE

-

-

-

WIRE

.140

TAB LOC

20-16

-

-

-

INSUL

.200

0

.170-.225

WIRE STRIP LENGTH

TERM APPL SPEC

FEED .640

APPL INSTRUCTIONS AT 8031

SET UP GAGE

LAYOUT LIST10

2

-

22593-1

NUT, HEX, JAM ,SS

137

1

-

1804310-1

MAGNET, RING

136

2

-

2-21000-6

SCR, SKT HD CAP 8-32 X .375

135

2

-

18028-2

WASHER, FLAT, REG M4

134

1

-

1804300-1

ASSEMBLY,APPLICATOR COUNTER

133

2

-

994991-5

SCREW, OVL HD, M4X12

132

2

-

4-354779-8

PIN, WIRE DISC (MARKED)

128

2

-

4-354779-6

PIN, WIRE DISC (MARKED)

127

2

-

4-354779-2

PIN, WIRE DISC (MARKED)

126

1

-

986950-1

WASHER, FLAT PRECISION

125

1

-

1-21030-2

PIN, DOWEL .1875 X .625

124

1

-

1-21030-6

PIN, DOWEL .1875 X 1.250

123

1

-

3-21028-2

PIN, SLOTTED SPRING .094 X .250

121

2

-

4-21028-9

PIN, SLOTTED SPRING .125 X .375

120

2

-

5-21028-1

PIN, SLOTTED SPRING .125 X .500

119

1

-

21029-5

PIN, SLOTTED SPRING .188 X .750

118

1

-

21899-4

WASHER, FLAT

117

4

-

21024-4

WASHER, SPRG LOCK, REG NO 8

115

2

-

21899-2

WASHER, FLAT

113

2

-

21024-5

WASHER, SPRG LOCK, REG NO 10

112

1

-

1-22202-7

NUT, HEX, JAM 5/16-24/UNF

109

1

-

21022-3

NUT, HEX, SELF-LOCKING, THIN, 10-32

108

1

-

21018-5

NUT, HEX, REG 6-32

107

2

-

21045-3

RING, RETAIN, EXTERN, 3/16 CRESCENT

106

1

-

8-21007-5

SCR, SET, CUP POINT 5/16-24 X .750

105

7

-

2-22733-8

SCR, BHSC, SELF-LOCKING, 1/4-20 X .625

104

1

-

21009-2

SCR, SET, SELF LOCKING 1/4-20 X .250

102

1

-

3-21000-9

SCR, SKT HD CAP 10-32 X 1.000

100

4

-

3-21000-8

SCR, SKT HD CAP 10-32 X .875

99

2

-

3-21000-6

SCR, SKT HD CAP 10-32 X .625

98

1

-

3-21000-4

SCR, SKT HD CAP 10-32 X .375

97

2

-

7-21000-5

SCR, SKT HD CAP 10-32 X .250

96

2

-

4-21006-0

SCR, SET, CUP POINT 8-32 X .250

94

1

-

21061-9

SCR, SET, CONE POINT 8-32 X .250

93

2

-

9-21000-3

SCR, SKT HD CAP 8-32 X 2.000

92

4

-

2-21000-9

SCR, SKT HD CAP 8-32 X .750

91

2

-

1-23030-1

SCR, SKT HD CAP, S-LOCK, 8-32 X .625

90

6

-

2-21000-8

SCR, SKT HD CAP 8-32 X .625

89

1

-

2-21002-1

SCR, BTN SKT HD CAP 8-32 X .375

87

1

-

6-23715-5

SCR, PAN SLT HD MACH 6-32 X 1.500

85

1

-

23030-1

SCR, SKT HD CAP, S-LOCK, 6-32 X .25

84

4

-

1-21002-5

SCR, BTN SKT HD CAP 4-40 X .500

82

1

-

2-21006-9

SCR, SET, CUP POINT 6-32 X .250

80

1

-

856822-1

PCB ASSEMBLY

79

1

-

856825-1

COVER, PCB

78

1

-

690603-1

SPRING ASSIST AMP-O-MATOR APPLICATOR

74

1

-

314867-1

COVER, FLAT FLEX

73

1

-

458109-1

WASHER, SPECIAL ADJUST PLATE

72

1

-

690517-1

SPACER, ADJ PLATE

71

1

-

22594-8

NUT, HEX, JAM

70

1

-

240628-1

PLATE, ADJUSTING

69

9

PLC

±

2

PLC

±

3

PLC

±

4

PLC

±

ANGLES

±

FINISH

-

DIMENSIONS:

IN

MATERIAL

-

DWN

RD

07FEB2007

CHK

T. ELBIN

07FEB2007

APVD

T. ELBIN

07FEB2007

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

-

TYCO

Electronics

Tyco Electronics
Harrisburg, PA 17105-3608

NAME

END FEED COM HINGE BAR APPLICATOR

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A1100779

C=567750

-

SCALE

1:1

SHEET

1

OF

2

REV

D

CUSTOMER VIEWABLE ASSEMBLY



AMP 4805 REV 31MAR2006

Pro/ENGINEER DRAWING


1

2

LOC		DIST		REVISONS			
A	66	P	LTR	DESCRIPTION		DATE	OWN
		-	-	SEE SHEET 1		-	-

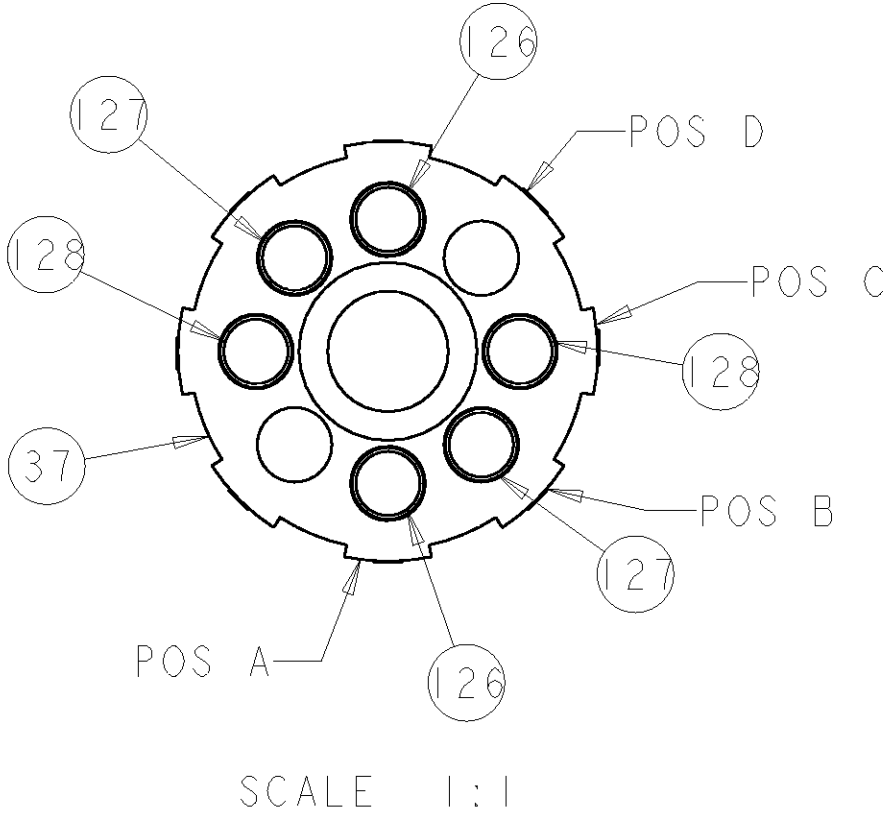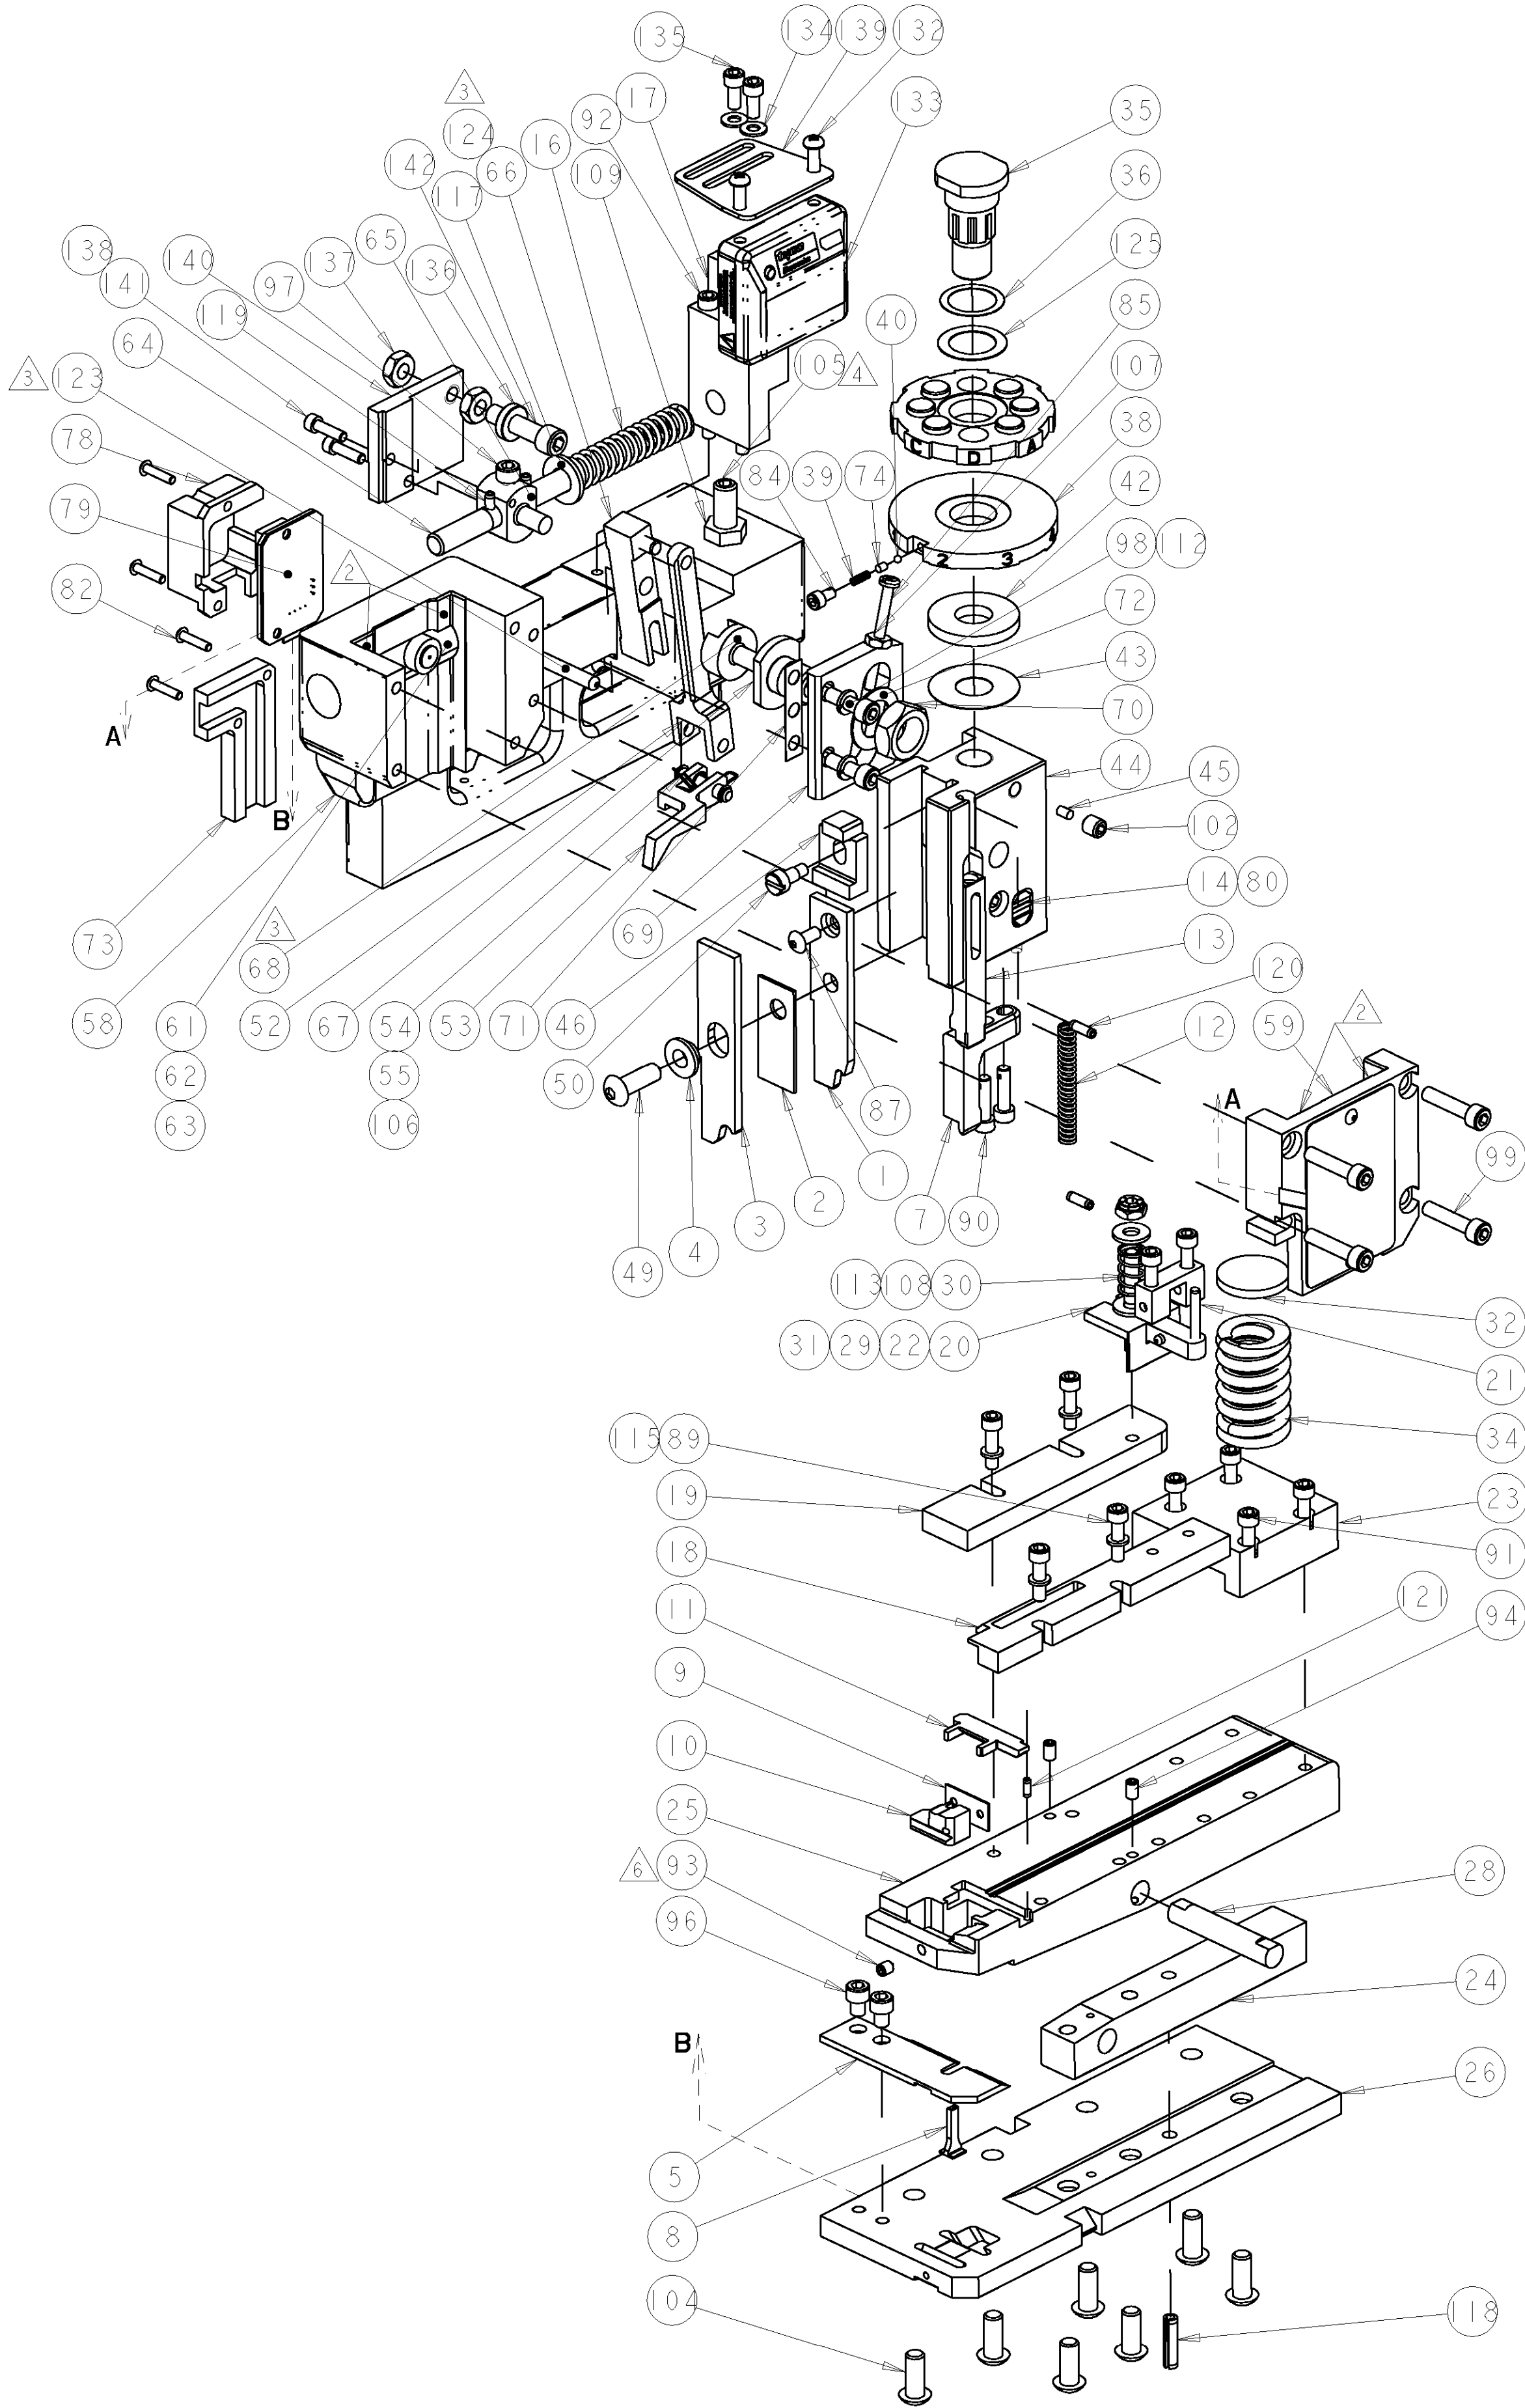

POST-FEED 1-5/8 STROKE

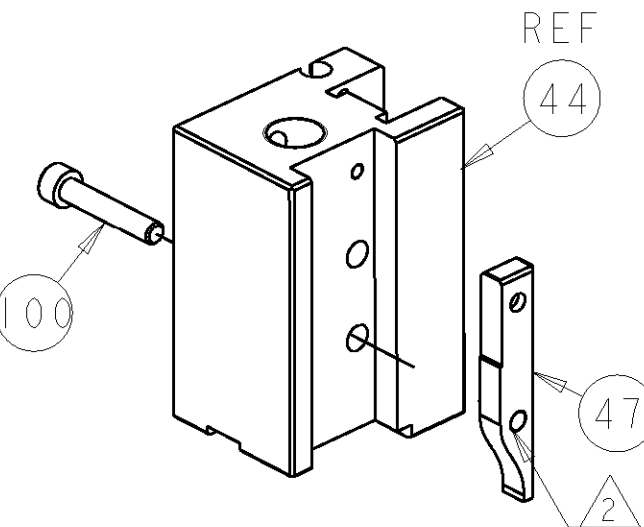

ROTATED 180°

THE INFORMATION CONTAINED HEREIN IS UNCLASSIFIED EXCEPT WHERE SHOWN OTHERWISE. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION AND IS NOT TO BE RELEASED TO THE PUBLIC OR TO ANY OTHER ORGANIZATION WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS CORPORATION.				DWN B. WEAVER	07FEB2007	tyco Electronics Tyco Electronics Harrisburg, PA 17105-3608			
CHK T. ELBIN				07FEB2007	NAME END FEED COM HINGE BAR APPLICATOR				
APVD T. ELBIN				07FEB2007	PRODUCT SPEC -				
DIMENSIONS:				TOLERANCES UNLESS OTHERWISE SPECIFIED:				SIZE	
IN				9 PLC ±				CAGE CODE	
				1 PLC ±				DRAWING NO	
				2 PLC ±				RESTRICTED TO	
				3 PLC ±				A100779C-567750	
				4 PLC ±				SCALE	
				ANGLES ±				3:5	
MATERIAL				FINISH				SHEET	
-				-				2 OF 2	
CUSTOMER DRAWING				WEIGHT				REV	
				-				D	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9