
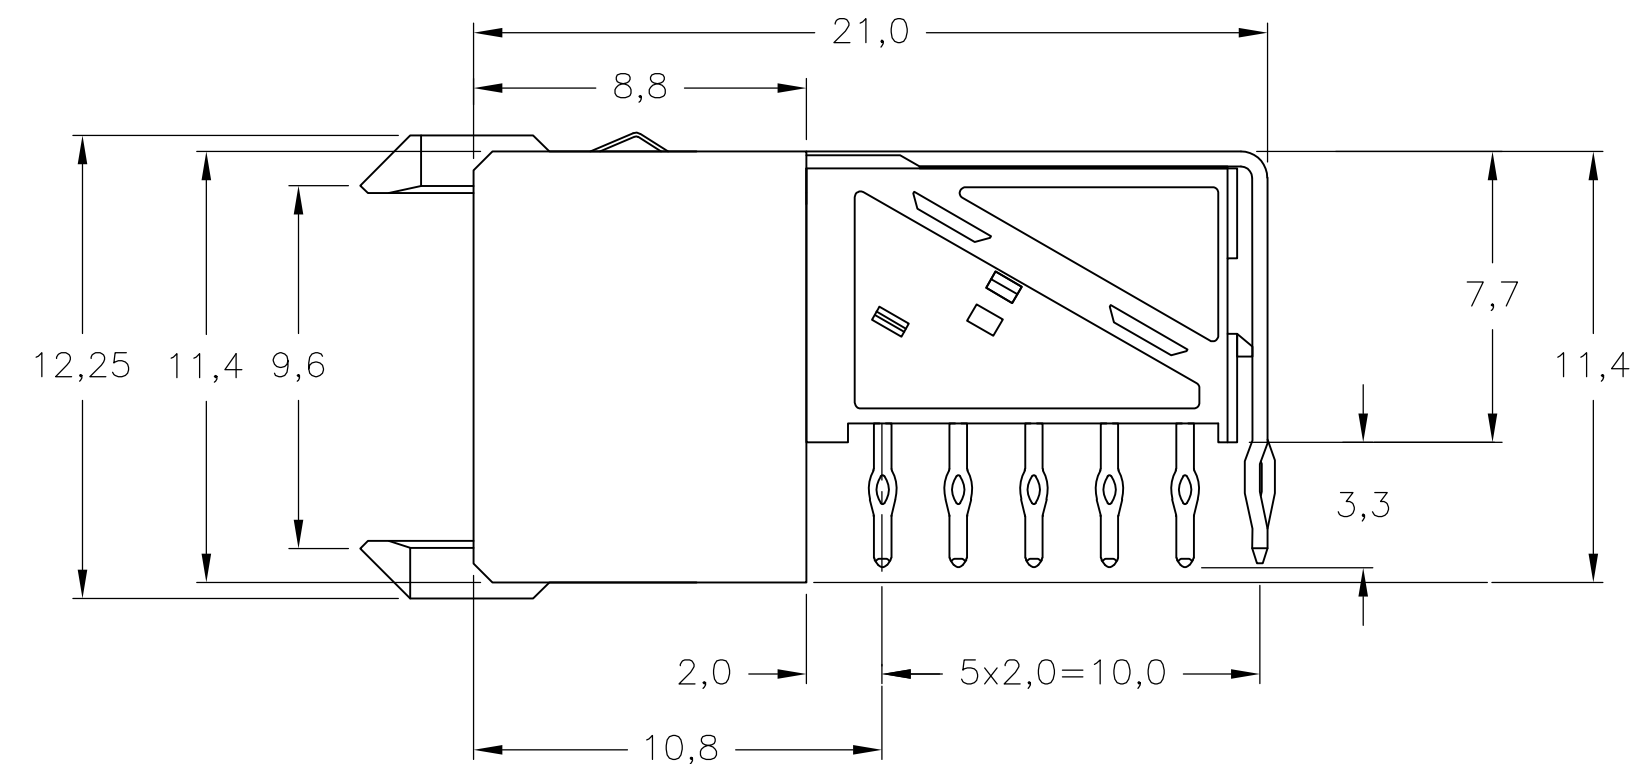
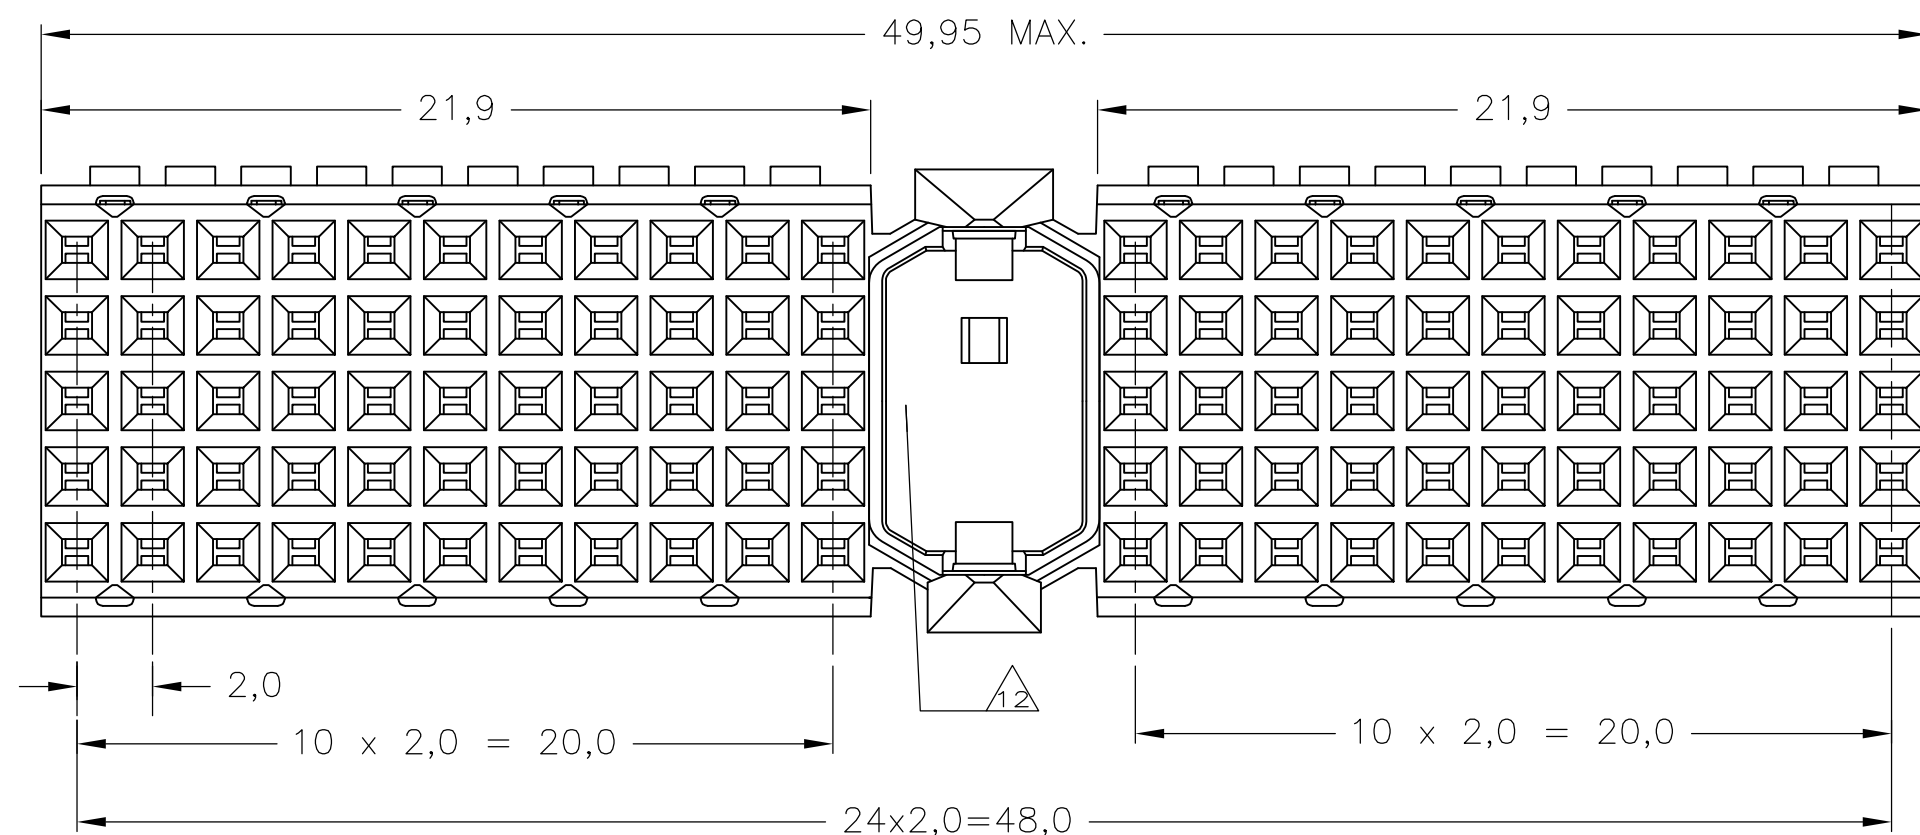
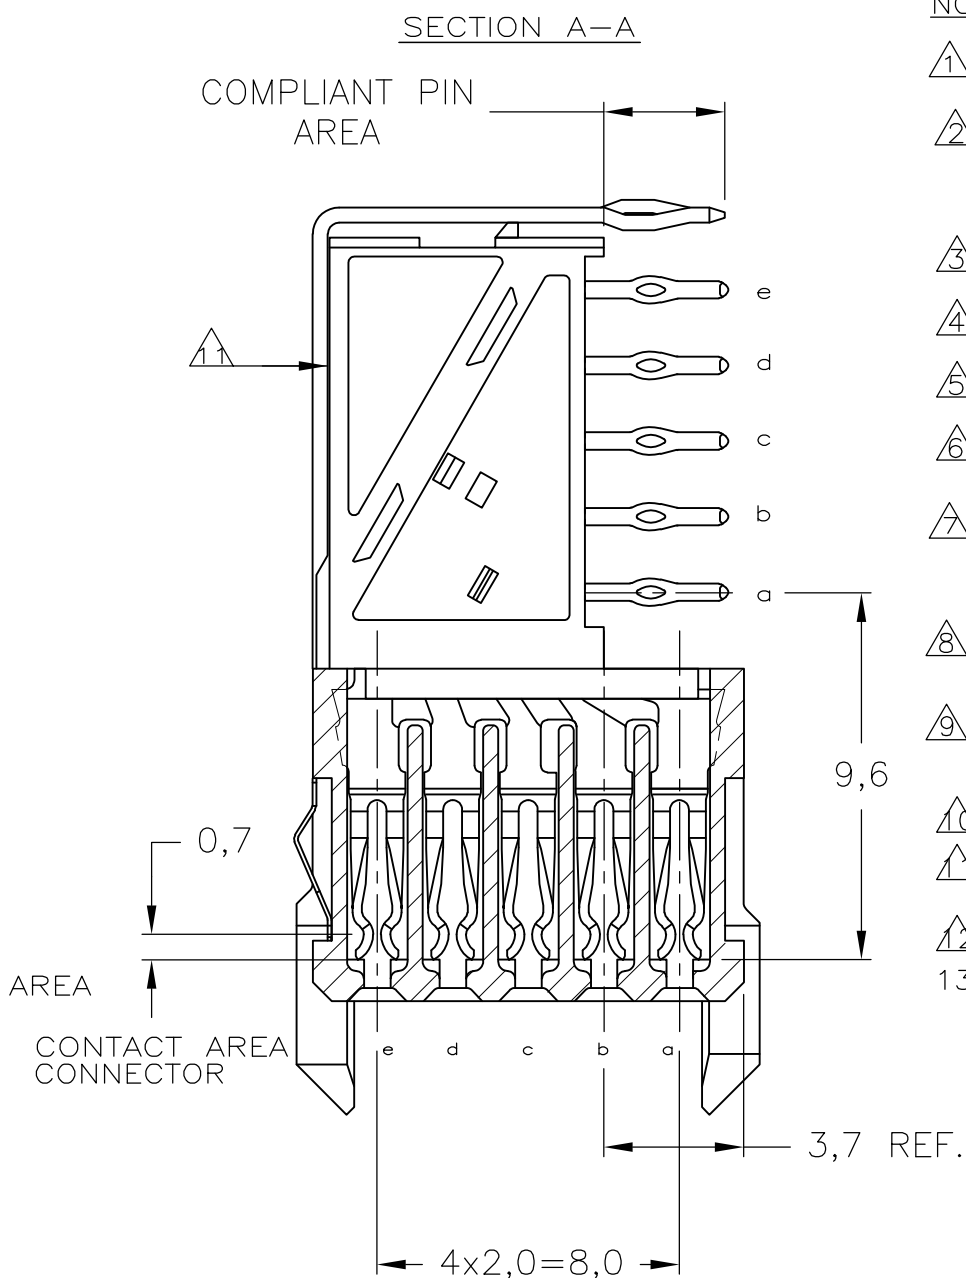


LOC	DIST	REVISIONS					
H	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	ECR-07-024984	19OCT2007	JvH	JB
			C	ECO-11-024491	13DEC11	SY	MQW

NOTES:

- ① MATERIAL CONTACTS; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
- ② GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27µm NICKEL MIN. AND COMPLIANT PIN SECTION: 0,5µm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.
- ③ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- ④ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
- ⑤ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA
GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- ⑥ CONNECTOR LUBRICATED WITH TELCORDIAGR-1217-CORE
APPROVED LUBRICANT.
- ⑦ PLATING SHIELD:
CONTACT AREA: 0,76µm Au MIN.
COMPLIANT PIN SECTION: 0,5µm Sn MIN.
REMAINDER : Ni
- ⑧ ASSEMBLY PRINTED WITH P/N AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
- ⑨ HOLE PATTERN FOR FEMALE CONNECTOR TYPE A
110 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
- ⑩ ROW "r" 13 PLATED THROUGH HOLES FOR UPPERSHIELD
- ⑪ SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED
ADHESIVE TAPE OR ADHESIVE.
- ⑫ AREA RESERVED FOR KEYING PART (BASIC P.N. 100526)
- 13 BASIC P.N. LOWERSHIELD: 5338108

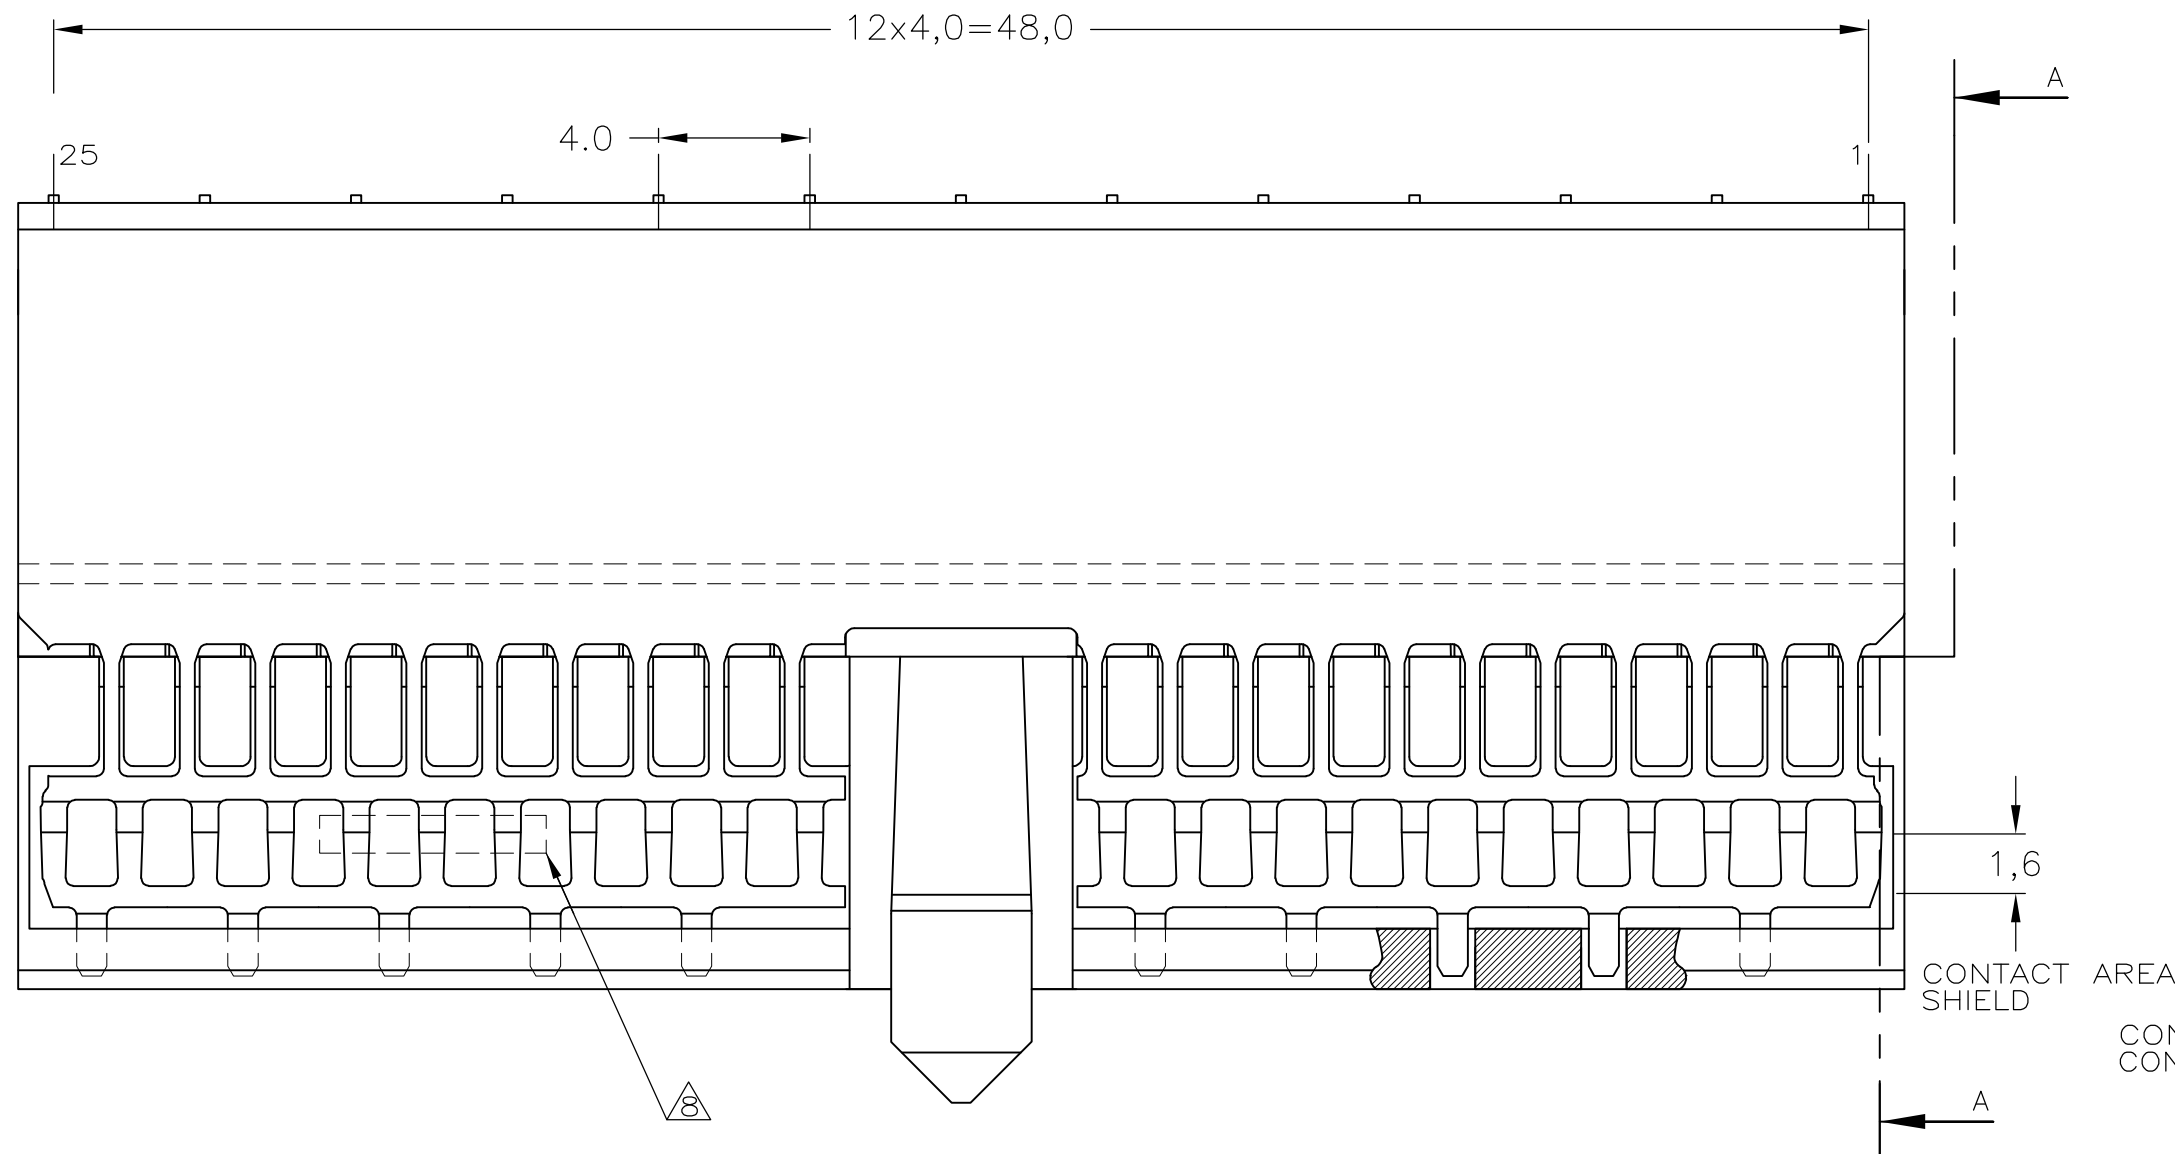


COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT

RECOMMENDED PCB-HOLE LAY-OUT		12x 4,0 = 48,0	
SEQUENCE COLUMNS ACCORDING CompactPCI	1	11	15
SEQUENCE COLUMNS ACCORDING IEC 61076-4-101 AND TYCO ELECTRONICS / AMP	25	15	11

SCALE 2,5:1

		1857994-9
		1857994-4
		1857994-1
FINISH	MATERIAL	PARTNUMBER

P.C.B. HOLE DIM. COMPLIANT PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

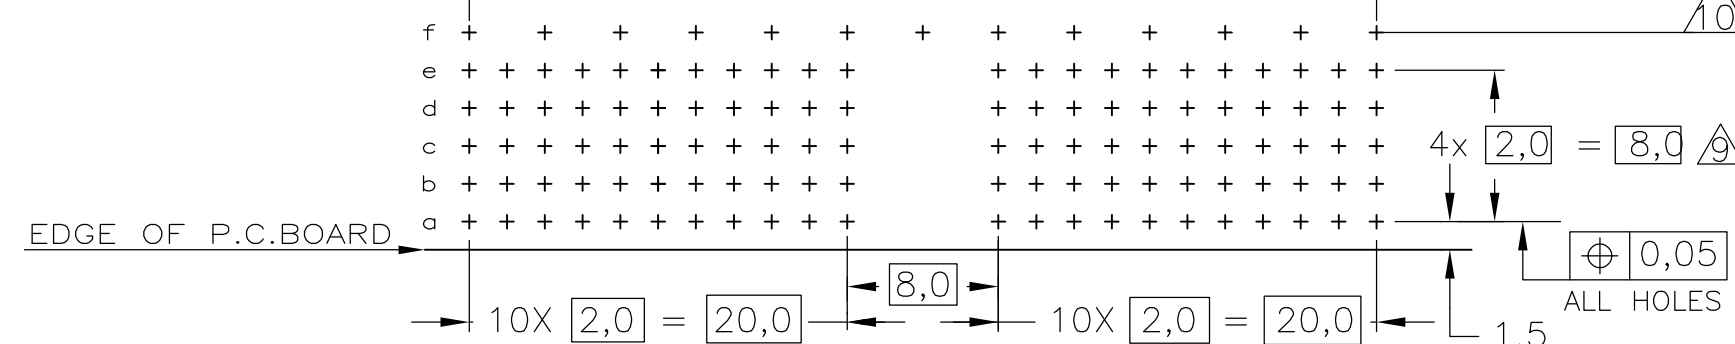

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm		0 PLC	$\pm$
		1 PLC	$\pm$
		2 PLC	$\pm$
		3 PLC	$\pm$
		4 PLC	$\pm$
		± 0.2	
MATERIAL		ANGLES	
		FINISH	
—		—	

DWN J.van Hoek	23AUG2007	 Tyco Electronics Corporation 's-Hertogenbosch, 5222AR-32			
CHK J.Broeksteeg	23AUG2007				
APVD B.Mooij	23AUG2007				
PRODUCT SPEC 108-19082					
APPLICATION SPEC 114-19029		NAME Z-PACK 2mm HM TYPE A - 25 COLUMNS PRE-SHIELDED RECEPTACLE			
WEIGHT -					
CUSTOMER DRAWING		SIZE A2	CAGE CODE 00779	DRAWING NO C-1857994	RESTRICTED TO -
SCALE 5:1			SHEET 1 of 1		REV C

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9