

DESCRIPTION

The LXP series of SOT-23 PIN diodes offers the circuit designer a higher level of quality in a commercially priced package. Choose from LXP1000, LXP1004, and LXP1008 for switching applications, LXP1002, LXP1005, LXP1010 and LXP1011 for low distortion attenuation from VHF through 1.5 GHz. They are available in a host of configurations (see configuration table for internal wiring.) The LXP series of PIN diodes supersedes the LSP series. The LXP products are supplied with a RoHS compliant matte tin finish. The LSP series was supplied with a lead/tin finish.

Other configurations are available - consult factory for details. When ordering specify configuration (example: LXP1004-23-4 is a common cathode dual pin).

KEY FEATURES

- Low Cost
- High Performance
- Surface Mount
- Available on Tape
- Multiple Configurations to Choose From
- RoHS Compliant¹

APPLICATIONS


The LXP1000 series of SOT-23 PIN diodes are ideal for low cost RF switching and attenuator applications through 1.5 GHz. They can be tuned for narrow band control for frequencies through 5 GHz. They are available as Single Diode, Series "T", and Common Pair configurations. The SOT-23 products can be supplied in bulk or on 'tape & reel' for automated pick and place assembly. Tape & Reeled parts are supplied in 8mm conductive polycarbonate tape.

APPLICATIONS/BENEFITS

- Low Current Switching
- Low Distortion Attenuation
- Ultra Low Distortion Switching
- High Quality / Economical Price.

ABSOLUTE MAXIMUM RATINGS AT 25° C (UNLESS OTHERWISE SPECIFIED)

Rating	Symbol	Value	Unit
Maximum Leakage Current @80% of Minimum Rated V_B	I_R	50	nA
Storage Temperature	T_{STG}	-65 to +125	°C
Operating Temperature	T_{OP}	-55 to +125	°C
Power Dissipation	P_D	250	mW
Forward Current (1uS Pulse)	I_F	1	A



IMPORTANT: For the most current data, consult our website: www.MICROSEMI.com



These devices are ESD sensitive and must be handled using ESD precautions.

¹ The LXP1000 Series of products are supplied with a RoHS complaint Gold finish.

ELECTRICAL PARAMETERS @ 25°C (Unless Otherwise Specified)

Model Number	$V_b(V)$ $I_R=10\mu A$ (Min)	$C_T(pF)$ ¹ @ V_R (Typ)	$V_R(V)$	$R_s(\Omega)$ ² @ I_F (Max)	$I_F(mA)$	$T_L(ns)$ ³ (Typ)	Application
LXP1000	35	0.28	5	2.5	5	40	Switch
LXP1002	100	0.32	50	4.0	100	1500	Attenuator
LXP1004	35	0.75	20	0.6	10	70	Switch
LXP1005	100	0.40	50	6.5	5	2000	Attenuator
LXP1008	50	0.30	20	1.5	10	200	Switch
LXP1010	100	0.35	50	3.0	10	1000	Attenuator
LXP1011	200	0.35	50	8.0	20	2000	Attenuator







Notes

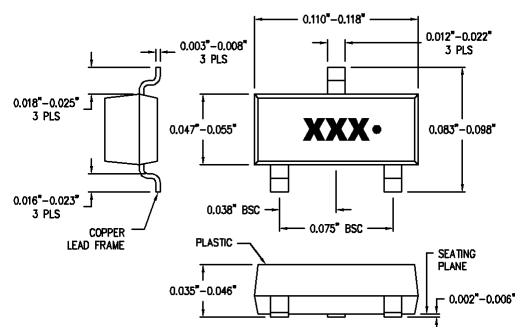
1. Capacitance (C_T) is measured at $f = 1$ MHz
2. Series Resistance (R_s) is measured at $f = 100$ MHz
3. Carrier Lifetime (T_L) is measured at $I_F = 10$ mA, $I_R = 6$ mA

TYPICAL CONFIGURATIONS

Model Number	23-0	23 - 1	23 - 2	23 - 3	23 - 4	23 - 5
LXP1000	•	•	•	•	•	
LXP1002	•	•	•	•	•	
LXP1004	•				•	
LXP1005	•					
LXP1008	•		•		•	
LXP1010	•					•
LXP1011	•					

PINOUT

2 3 - 0	2 3 - 1	2 3 - 2
		
2 3 - 3	2 3 - 4	2 3 - 5
		

SOT23 (23) STYLE PACKAGE


CROSS REFERENCE				
MSC P/N	INDUSTRY EQUIVALENT			
LXP1000 – 23-0	HSMP3890			
LXP1000 – 23-1	HSMP3891			
LXP1000 – 23-2	HSMP3892			
LXP1000 – 23-3	HSMP3893			
LXP1000 – 23-4	HSMP3894			
LXP1002 – 23-0	HSMP3810	MA4P274		
LXP1002 – 23-1	HSMP3811			
LXP1002 – 23-2	HSMP3812	MA4P274ST		
LXP1002 – 23-4	HSMP3814	MA4P274CK		
LXP1004 – 23-0	HSMP3820			
LXP1004 – 23-1	HSMP3821			
LXP1004 – 23-2	HSMP3822			
LXP1004 – 23-3	HSMP3823			
LXP1004 – 23-4	HSMP3824			
LXP1005 – 23-0	HSMP3880			
LXP1008 – 23-2		MA4P789ST	SMP1310-12	
LXP1008 – 23-4		MA4P789CK	SMP1310-13	
LXP1010 – 23-0		MA4P274		
LXP1011 – 23-0		MA4CP103A	SMP1304-01	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[LXP1000-23-2](#) [LXP1002-23-4](#) [LXP1002-23-0](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9