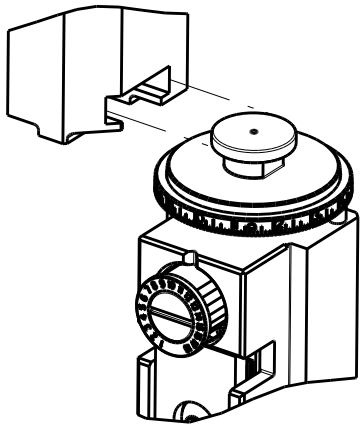



8		7	
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT 20		20	
BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.			
ATLANTIC VERSION TERMINATOR INTERFACE ADAPTER	PART NUMBER	REVISION	DESCRIPTION
	2151314-1	B	FINE CRIMP HEIGHT ADJUST
	2151314-2	B	FINE CRIMP HEIGHT ADJUST
	2151314-5	B	FINE CRIMP HEIGHT ADJUST
	2151314-6	B	NON-CRIMP HEIGHT ADJUST
	2151314-7	B	FINE CRIMP HEIGHT ADJUST
	7-2151314-7	A	CRIMP TOOLING KIT

APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	2.79 mm [.110]	F
STABILIZER	2.79 mm [.110]	O
INSULATION	3.94 mm [.155]	F
APPLICATOR INSTRUCTIONS 408-10389		

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: AMP-IN			
WIRE STRIP LENGTH		INSULATION DIAMETER RANGE	
4.83-5.59 mm [.190-.220 IN]		Ø2.29-3.81 mm [.090-.150 IN]	
TERMINAL APPLICATION SPECIFICATION	114-1016	-	-
	-	-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
3-794013-1			

WIRE SIZE			WIRE CRIMP HEIGHT mm [INCH]	WIRE CRIMPER PART NUMBER	STABILIZER CRIMP HEIGHT mm [INCH]	STAIBILZER CRIMPER PART NUMBER	CRIMP HEIGHT REFERENCE SETTING
12 AWG			2.16+/-0.05 [.085+/- .002]	13-7-456408-6	2.79+/-0.05 [.110+/- .002]	13-815664-2	9.1

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: AMP-IN			
WIRE STRIP LENGTH		INSULATION DIAMETER RANGE	
4.83-5.59 mm [.190-.220 IN]		Ø2.29-3.81 mm [.090-.150 IN]	
TERMINAL APPLICATION SPECIFICATION	114-1016	-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
3-770060-1			



WIRE SIZE			WIRE CRIMP HEIGHT mm [INCH]	WIRE CRIMPER PART NUMBER	STABILIZER CRIMP HEIGHT mm [INCH]	STAIBILZER CRIMPER PART NUMBER	CRIMP HEIGHT REFERENCE SETTING
14 AWG			1.40+/-0.05 [.055+/- .002]	14-2-456408-5	2.75+/-0.10 [.108+/- .004]	14-815664-6	7.6
18-16 AWG			1.09+/-0.05 [.043+/- .002]	14-2-456408-6	2.40+/-0.10 [.094+/- .004]	14-815664-7	7.8



- RECOMMENDED SPARE PARTS
- GREASE BEARING SURFACES LIGHTLY

- LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
 - MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151314-4
 - PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151314-4
 - SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151314-5
 - SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2151314-6

- ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
- APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 62 & 242. FOR -6 ONLY APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 37 & 242.

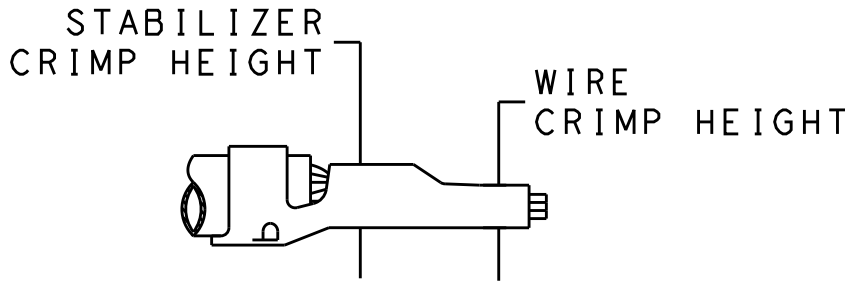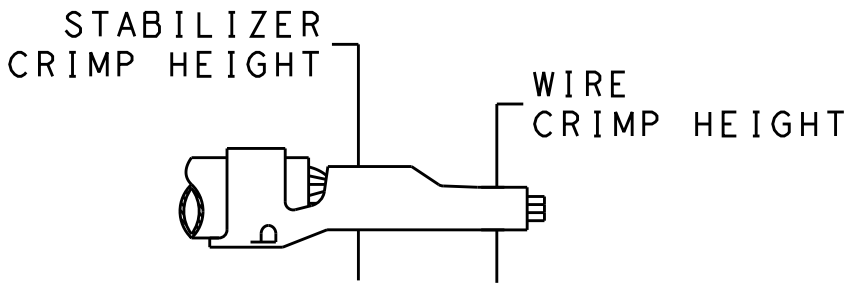


- GREASE THREADS, GROOVE AND O-RING ON ITEMS 35 & 252.
- MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.
- CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.
- SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
- TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON THE BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.
- WHEN ASSEMBLING A NON CRIMP HEIGHT ADJUST APPLICATOR (-6) USE SHIMS FROM ITEM 260 TO ACHIEVE A NOMINAL SHIM HEIGHT OF 3.72.
- ITEMS 1 & 178 TO BE USED WITH 12 AWG ONLY. ITEMS TO BE SHIPPED WITH APPLICATOR.
- ITEMS 253 & 254 TO BE USED WITH 14 AWG ONLY. ITEMS TO BE SHIPPED WITH APPLICATOR.
- ITEMS 255 & 256 TO BE USED WITH 18-16 AWG ONLY. APPLICATOR TO BE SET UP WITH THESE ITEMS.
- POSITION ITEM 19 BETWEEN ITEMS 1 AND 178.

*WARNING							
ON INSTALLATION, SET WIRE DISC, ITEM 40 TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.							
-	-	1	-	-	-	2119957-2	APPLICATOR SHIM PACK
-	1	1	1	1	1	2-456408-6	CRIMPER, WIRE PREMIUM
-	1	1	1	1	1	815664-7	CRIMPER, WIRE-O
-77	-7	-6	-5	-2	-1	PART NO	DESCRIPTION
							ITEM NO




ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

SET UP GAUGE 2119599-1		LOC A	DIST 66	REVISIONS			
				P	LTR	DESCRIPTION	DATE
					A	RELEASED	13MAR2013
					B	ECR-15-010117	15JUL2015
					B1	ECR-15-011816	10AUG2015




1	1	1	1	1	1	2-456408-5	CRIMPER, WIRE PREMIUM	254
1	1	1	1	1	1	815664-6	CRIMPER, WIRE-O	253
-	1	-	1	1	1	8-21084-0	O-RING, .676 ID, .070 DIA. MAT.	252
-	-	-	-	1	-	2119640-1	PUSH ROD, AIR FEED	250
-	-	-	-	1	-	2079988-1	BUSHING, LCH5-12, MISUMI	249
-	-	-	-	1	-	2119641-1	FEED CAM, AIR FEED	248
-	1	-	1	1	1	2119798-1	DETENT PIN	247
-	1	-	1	1	1	1-22279-3	SPRING, COMPRESSION	246
-	-	1	-	-	-	2119758-1	RAM, AMP STYLE, SIDE FEED, NON-ADJ.	245
-	1	1	1	1	1	2119082-6	CAM, SNAIL, INSULATION ADJUSTMENT	244
-	1	1	1	1	1	2079764-1	WASHER, WAVE SPRING, CREST-TO-CREST	243
-	1	1	1	1	1	2119083-1	RETAINER, INSULATION DIAL	242
-	1	1	1	1	1	7-18023-7	SCR, SKT HD CAP M3 X 4.0	241
-	-	2	2	-	-	2168400-6	SHCS, LOW HEAD, RoHS, M5 X 16	240
-	-	-	-	-	1	2119580-1	MECHANICAL FEED ASSEMBLY	239
-	-	-	-	-	1	2063440-1	AIR FEED MODULE	238
-	-	1	1	-	-	2119740-2	TAG,IDENTIFICATION	213
-	-	1	1	-	-	1901094-3	SPACER, FEEDER	198
-	1	1	1	1	1	7-456408-6	CRIMPER, WIRE PREMIUM	178
-	-	-	-	2	-	21045-3	RING, RETAIN, EXTERN, 3/16 CRESCENT	172
-	1	1	1	1	1	994969-1	MAGNET, RARE EARTH HIGH ENERGY	166
-	REF	REF	REF	REF	REF	994970-2	COUNTER, MAGNETIC	164
-	-	-	-	1	-	240638-1	SPRING, FEED FINGER	163
-	-	-	-	1	-	3-23627-7	PIN, RETAIN, GRVD, 3/16 X .854	137
-	-	-	-	1	-	2119799-1	HOLDER,FEED FINGER, AF	136
-	-	REF	REF	-	-	SEE NOTE 4	MEMORY CHIP, PROGRAMMED	135
-	-	1	1	-	-	1633743-1	SERVO FEED LATCH ASM	133
-	1	1	1	1	1	1-18028-2	WASHER, FLAT, REG M4	119
-	-	REF	REF	-	-	2119944-1	FEED FINGER ASSEMBLY,SF	117
-	1	1	1	1	1	455888-5	SPACER, CRIMPER	82
-	1	1	1	1	1	2119956-1	DOCUMENTATION PACKAGE	71
-	1	-	-	1	1	2119740-1	TAG,IDENTIFICATION	67
-	2	2	2	2	2	2168078-1	SCREW, DRIVE, RH, RoHS, 2 x .188	66
-	1	-	1	1	1	2119793-1	LIMITER, ADJUSTMENT BOLT	63
-	3	-	3	3	3	992763-5	SCR, SET, SOC, CONE POINT, M3 x 4.0	62
-	1	1	1	1	1	2079383-4	SCR, BHSC, RoHS (M4 X 8)	60
-	-	-	-	-	1	5-18022-5	SCR, HEX HD CAP, M4 X 6.0	59
-	-	-	-	-	1	1338685-1	PAWL, FEED	56
-	4	4	4	4	4	2168400-1	SHCS, LOW HEAD, RoHS, M4 X 12	54
-	-	-	-	-	1	18023-9	SCR, SKT HD CAP M4 X 6.0	49
-	-	-	-	-	1	2119652-1	FEED CAM, PRE FEED	48
-	-	-	-	-	1	2119653-1	FEED CAM, POST FEED	47
-	1	1	1	1	1	2119656-9	APPLICATOR BASIC ASSEMBLY, SF	46
-	1	-	1	1	1	2119370-1	RAM, AMP STYLE, SIDE FEED	44
-	1	1	1	1	1	2079383-7	SCR, BHSC, RoHS (M8 X 25)	41
-	1	-	1	1	1	2119645-1	DISC, NUMBERED FA WIRE ADJUSTMENT	40
-	1	-	1	1	1	2119957-1	APPLICATOR SHIM PACK	39
-	1	1	1	1	1	2119644-5	RAM WASHER, PRECISION	38
-	1	1	1	1	1	2119085-1	FA HEAD, ATLANTIC STYLE	37
-	1	-	1	1	1	2119092-1	BOLT, ADJUSTMENT	35
-	1	1	1	1	1	469465-4	STOP, WIRE	34
-	2	2	2	2	2	2079383-5	SCR, BHSC, RoHS (M4 X 20)	33
-	1	1	1	1	1	2161328-1	HEX HEAD, FLANGED, M5 x 8mm LONG	32
-	1	1	1	1	1	1-1320908-0	SPACER, STRIP GUIDE	30
-	1	1	1	1	1	2119959-1	ASSEMBLY, STRIP GUIDE	29
-	1	1	1	1	1	455888-3	SPACER, CRIMPER	28
-	1	1	1	1	1	1320928-2	STRIP GUIDE	24
-	1	1	1	1	1	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	21
-	1	1	1	1	1	1-18028-2	WASHER, FLAT, REG M4	20
-	1	1	1	1	1	2119533-3	STRIPPER, SIDE FEED	19
-	1	1	1	1	1	2119806-1	INSERT, SHEAR	13
-	1	1	1	1	1	3-22280-3	SPRING, COMPRESSION	12
-	1	1	1	1	1	1-356885-4	STOP, SHEAR	11
-	1	1	1	1	1	2119805-1	SHEAR HOLDER, FRONT	10
-	1	1	1	1	1	462006-6	FLOATING SHEAR, FRONT	9
1	1	1	1	1	1	1633923-5	ANVIL, COMBINATION	8
-	-	-	-	-	-	-	-	7
-	-	-	-	-	-	-	-	6
-	1	1	1	1	1	1-2119757-2	DEPRESSOR, SHEAR	5
-	1	1	1	1	1	238011-8	BLOCK, CRIMPER SPACER	4
1	1	1	1	1	1	6-2119582-7	CRIMPER, INSULATION F PREMIUM	3
-	1	1	1	1	1	455888-7	SPACER, CRIMPER	2
1	1	1	1	1	1	815664-2	CRIMPER, WIRE-O	1

THIS IS SUBJECT TO CHANGE WITHOUT NOTICE. THE USER SHALL BE RESPONSIBLE FOR VERIFYING THE DIMENSIONS OF THE PARTS USED IN THE ASSEMBLY. DIMENSIONS SHALL BE CONTACTED FOR THE LATEST NOTATION.		DWN L. GROSS	31JAN2013	TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK T. ELBIN	31JAN2013	NAME Ocean Side Feed Applicator	
		APVD M. CLIFFORD	31JAN2013	SIZE 00779	
		PRODUCT SPEC		CAGE CODE 00779	
MATERIAL -		APPLICATION SPEC		DRAWING NO 00779	
		FINISH -		SHEET 1 OF 4	
		WEIGHT -		REV B1	
		Customer Accessible Production Drawing		SCALE 1:2	


PNEUMATIC

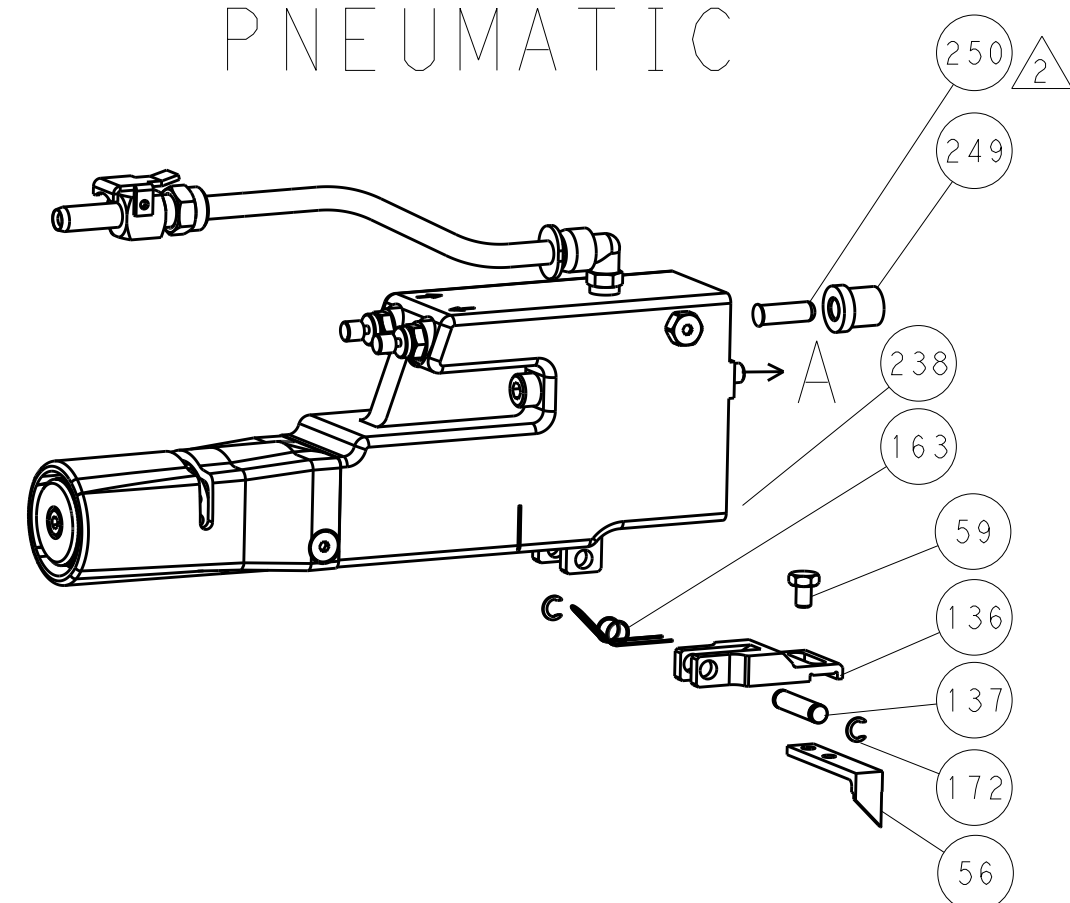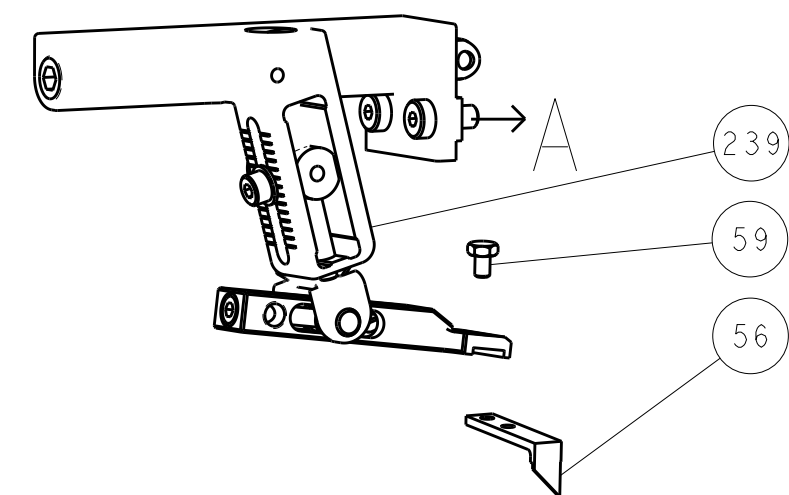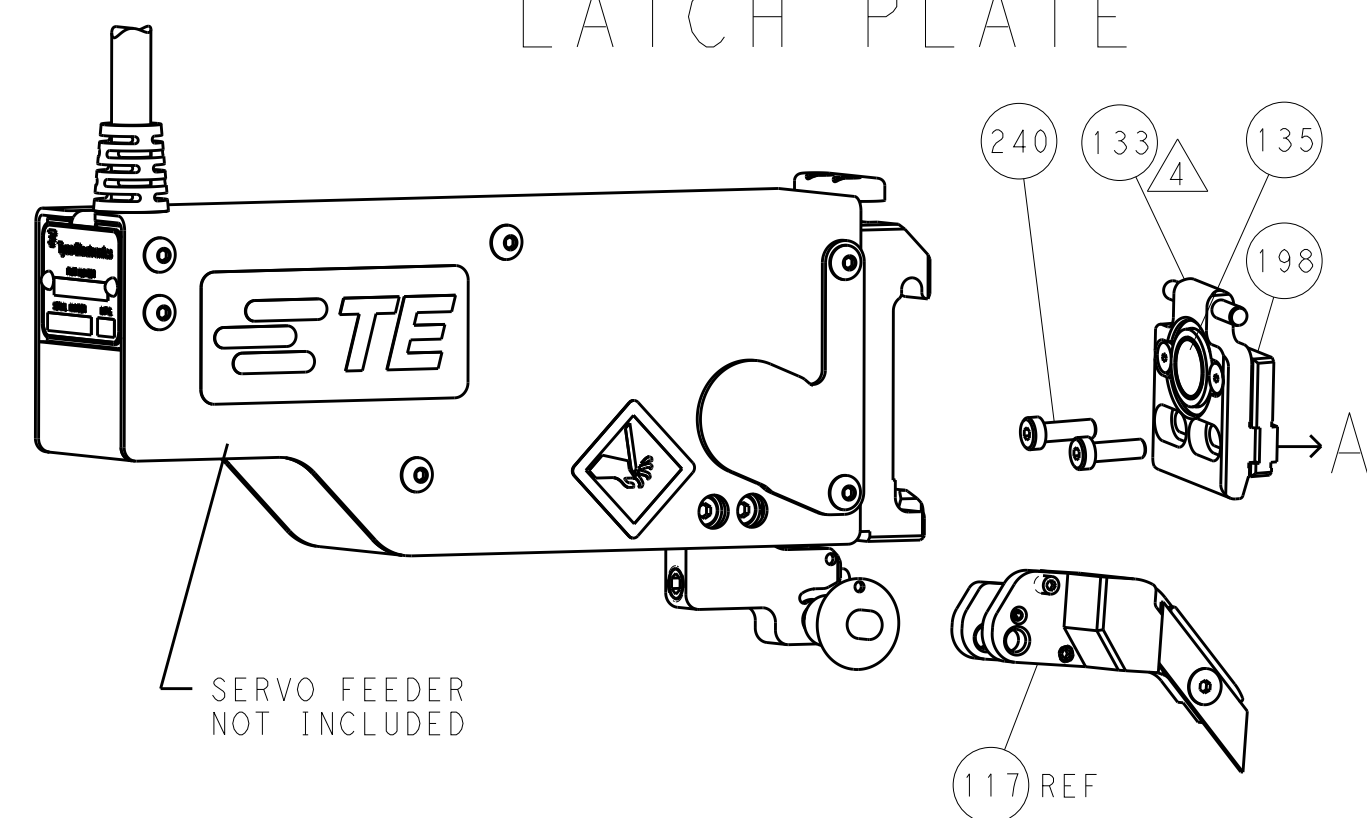SERVO
LATCH PLATE

CAM POSITIONS

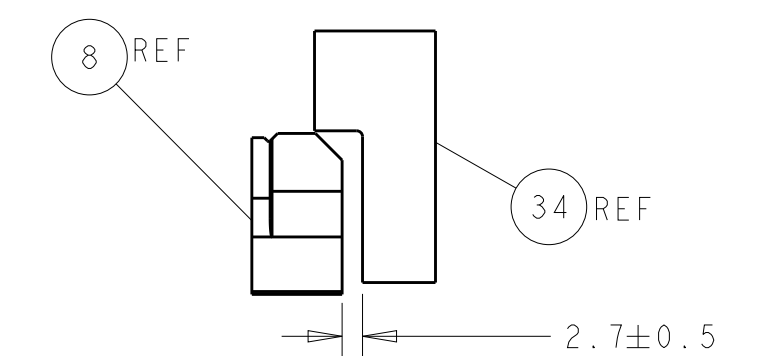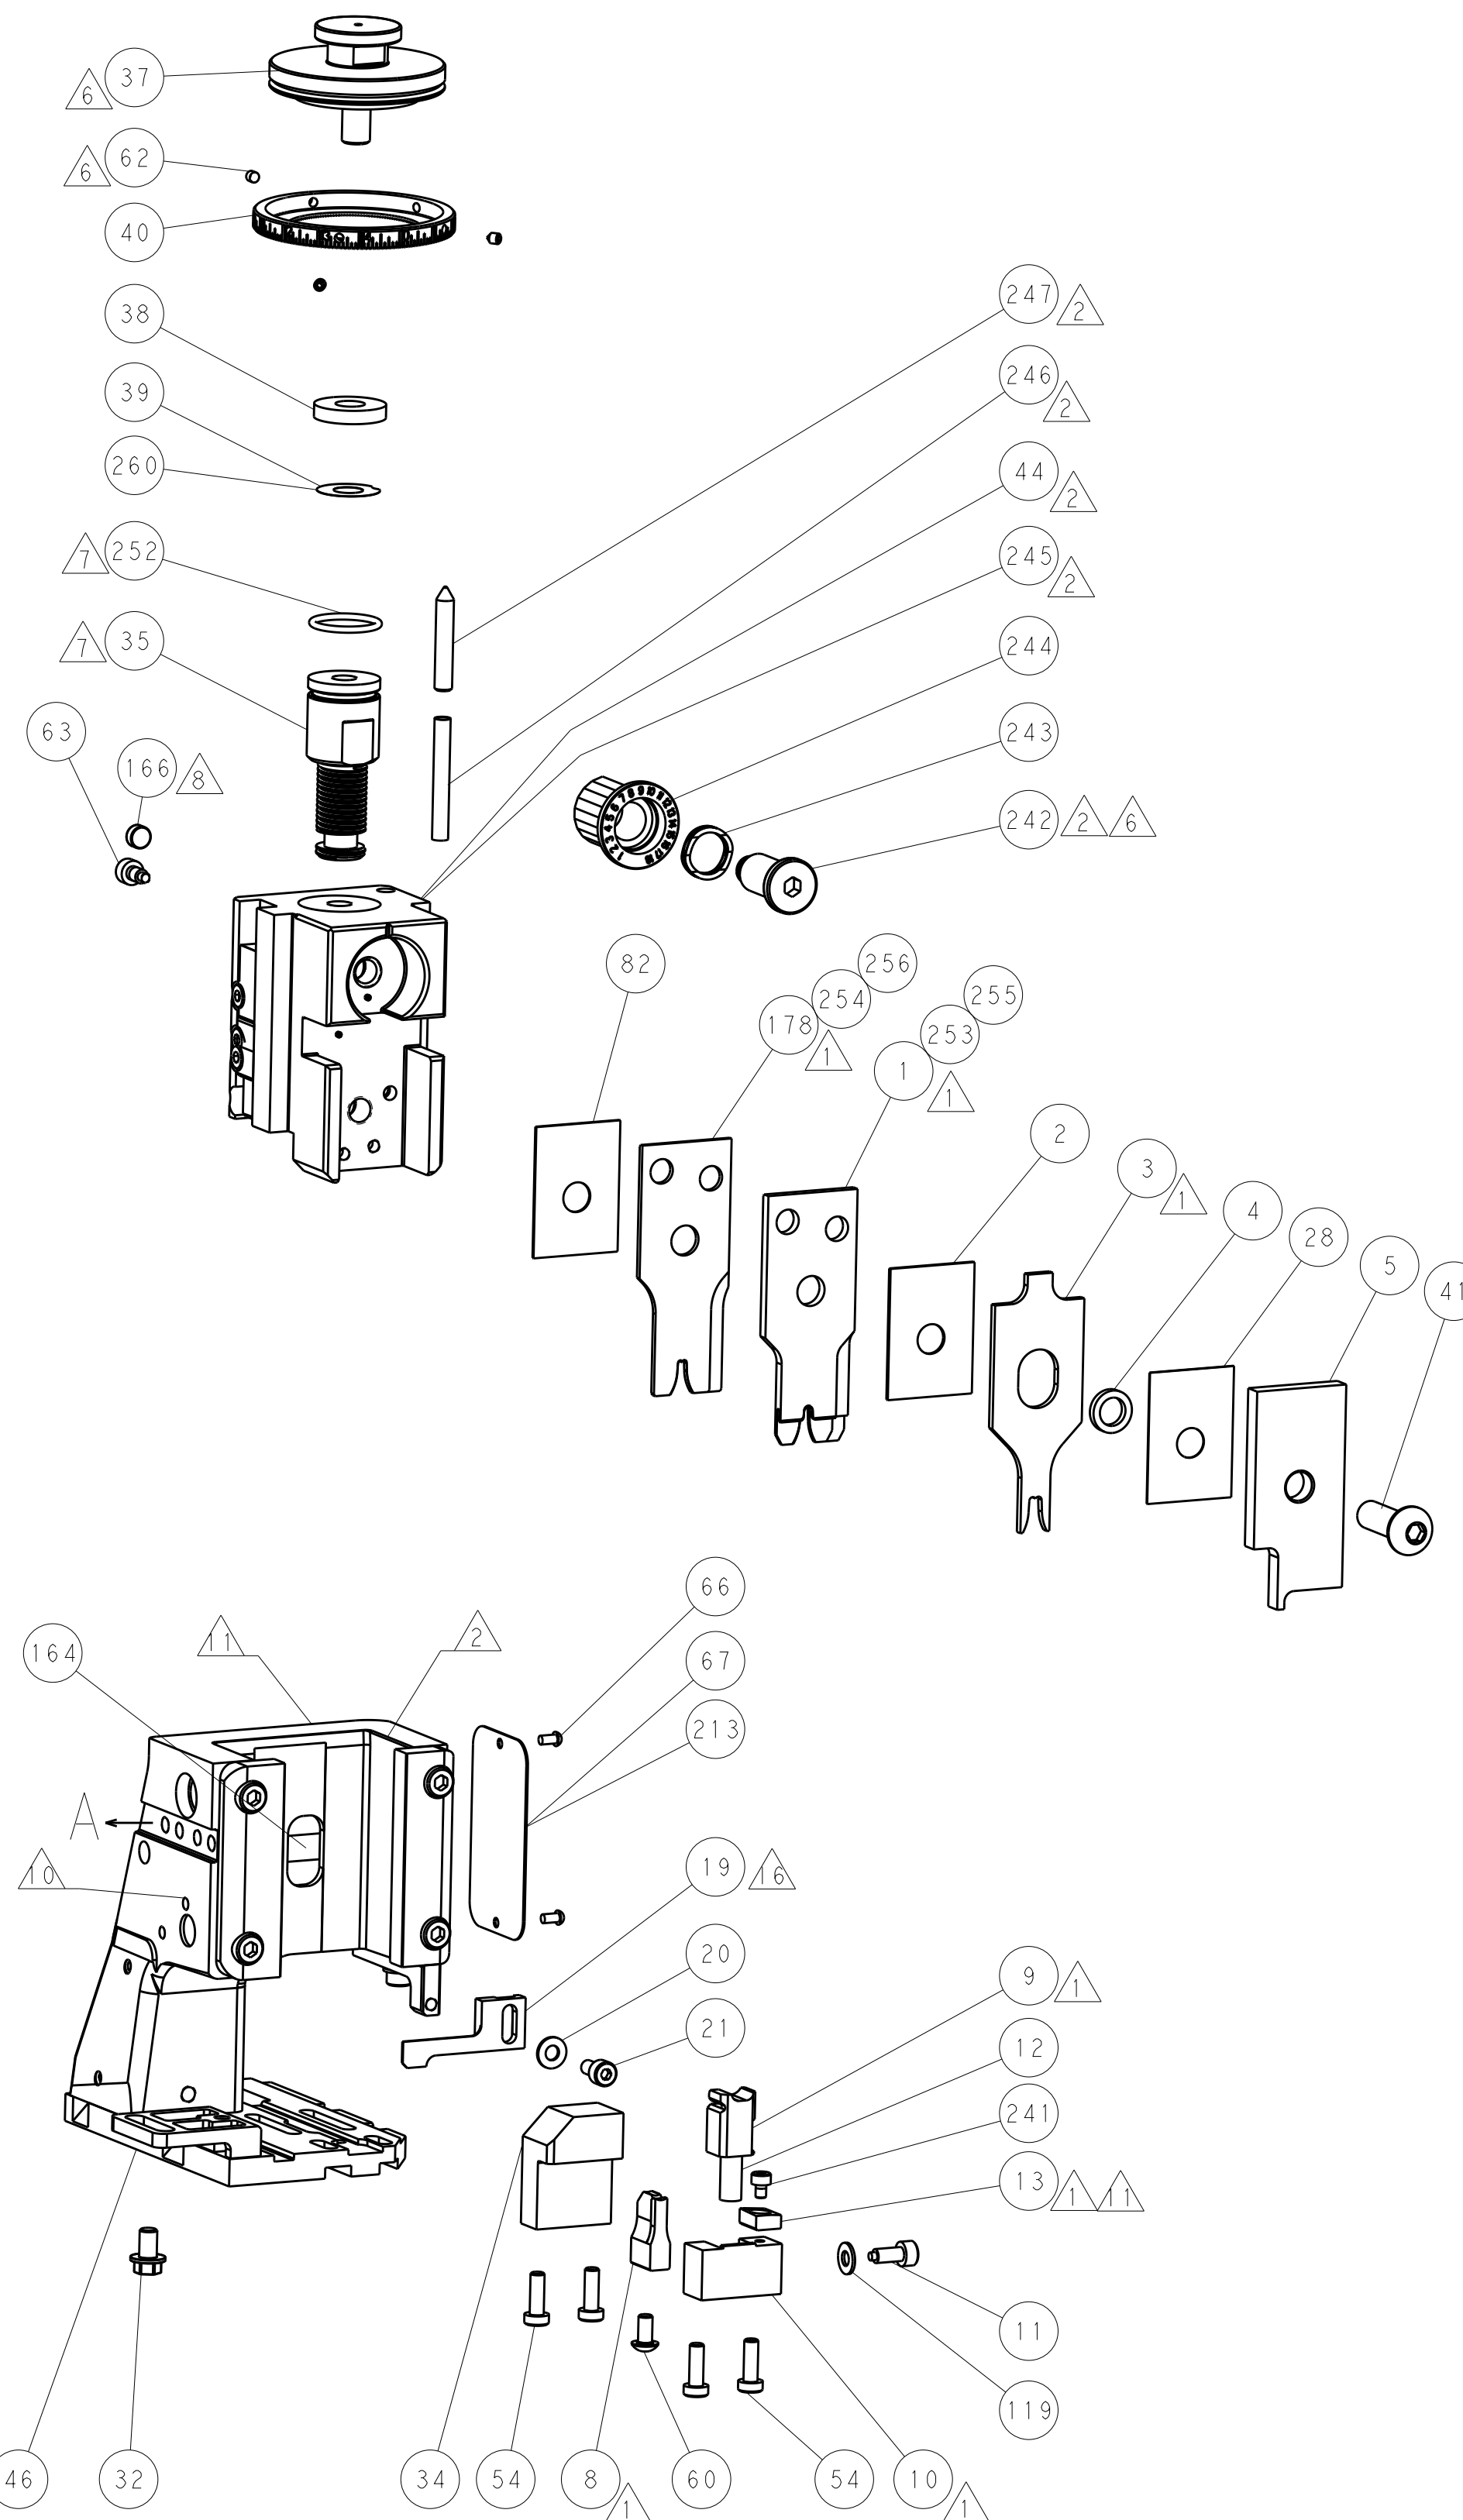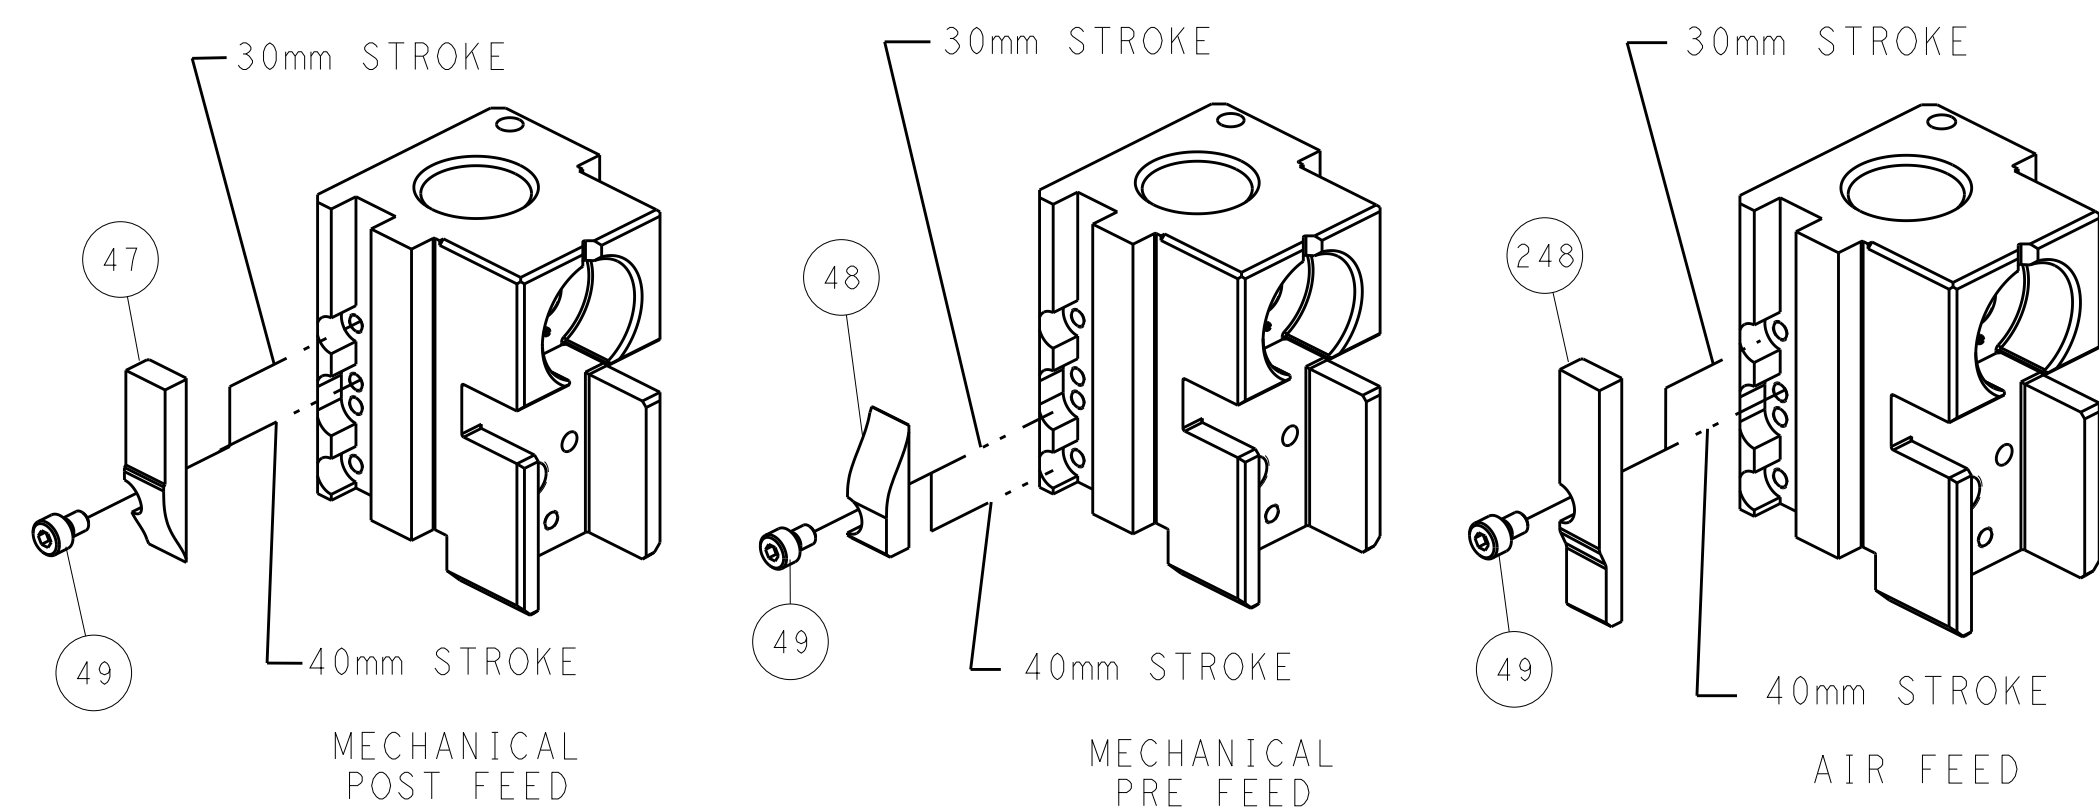


WIRE STOP LOCATION

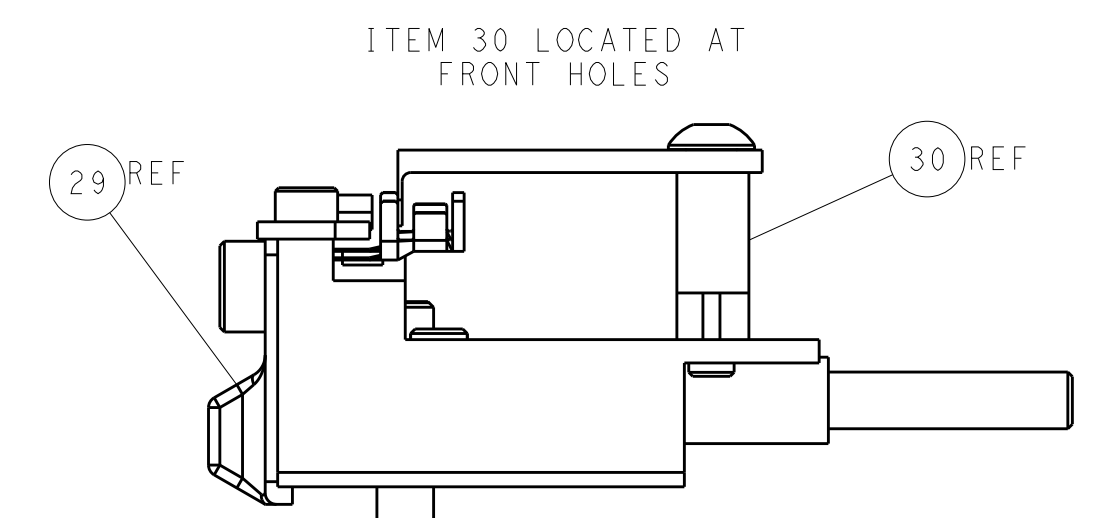


FEED TRACK POSITION GUIDE BY INSULATION BARREL

ATLANTIC VERSION

Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

THIS DRAWING IS A REGISTERED DOCUMENT FOR THE ENGINEERING CORPORATION IT IS SUBJECT TO CHARGE AND THE CONTROLLING ENGINEERING ORGANIZATION MAY BE REPRODUCED OR COPIED FOR ANY PURPOSE WITHOUT PERMISSION		DWN 31JAN2013		 TE Connectivity Harrisburg, PA 17105-3608	
		CHK ELBIN 31JAN2013			
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ±.1 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±.1		NAME Ocean Side Feed Applicator	
		PRODUCT SPEC - APPLICATION SPEC -		SIZE A	
MATERIAL -		FINISH -		CAGE CODE 00779	
		WEIGHT -		DRAWING NO C=2151314	
Customer Accessible Production Drawing				SCALE 1:2 SHEET 2 of 4 REV B	

8		7		6		5		4		3		
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		20								
(C) COPYRIGHT 20		BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.										
PACIFIC VERSION TERMINATOR INTERFACE ADAPTER		PART NUMBER	REVISION	DESCRIPTION	FEED TYPE	APPLICATOR STYLE CONVERSION CHART						
						CONVERT TO	PART NUMBERS REQUIRED					
		2-2151314-1	B	FINE CRIMP HEIGHT ADJUST	MECHANICAL	PNEUMATIC FEED	2119950-1	1338685-1	5-18022-5	2119641-2	2119799-1	2063440-1
						SERVO LATCH PLATE	2119951-1	-	8-2151314-5	1901094-3	2-1752354-6	2168400-6 (QUANTITY 2)
						SMART APPLICATOR	2161326-1	-	8-2151314-4	-	-	-
		2-2151314-2	B	FINE CRIMP HEIGHT ADJUST	PNEUMATIC	MECHANICAL FEED	2119949-1	1338685-1	5-18022-5	2119653-2	-	-
						SERVO LATCH PLATE	2119951-1	-	8-2151314-5	1901094-3	2-1752354-6	2168400-6 (QUANTITY 2)
						SMART APPLICATOR	2161326-1	-	8-2151314-4	-	-	-
		2-2151314-5	B	FINE CRIMP HEIGHT ADJUST	SERVO LATCH PLATE ⁴	MECHANICAL FEED	2119949-1	1338685-1	5-18022-5	2119653-2	-	-
						PNEUMATIC FEED	2119950-1	1338685-1	5-18022-5	2119641-2	2119799-1	2063440-1
		2-2151314-7	B	FINE CRIMP HEIGHT ADJUST	NONE	-	-	-	-	-	-	-
		7-2151314-7	A	CRIMP TOOLING KIT	-	-	-	-	-	-	-	-


APPLICATOR DATA		
CRIMP	SIZE	TYPE
WIRE	2.79 mm [.110]	F
STABILIZER	2.79 mm [.110]	O
INSULATION	3.94 mm [.155]	F

APPLICATOR INSTRUCTIONS
DWG_APP_INSTRUCTIONS:2



TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: AMP - IN			
WIRE STRIP LENGTH 4.83-5.59 mm [.190-.220 IN]		INSULATION DIAMETER RANGE Ø2.29-3.81 mm [.090-.150 IN]	
TERMINAL APPLICATION 		114-1016	
SPECIFICATION		-	
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
3-794013-1			

WIRE SIZE		CRIMP HEIGHT mm [INCH]		WIRE CRIMPER PART NUMBER	STABILIZER CRIMP HEIGHT mm [INCH]	STABILIZER CRIMPER PART NUMBER	CRIMP HEIGHT REFERENCE SETTING
12 AWG		2.16+/-0.05 [0.085+/-0.002]		27-456408-6	2.79+/-0.05 [0.110+/-0.002]	2815664-2	9.1

TERMINAL DATA: TE TERMINAL		TE CRIMP SPECIFICATION	
TERMINAL NAME: AMP-IN			
WIRE STRIP LENGTH 4.83-5.59 mm [.190-.220 IN]			INSULATION DIAMETER RANGE Ø2.29-3.81 mm [.090-.150 IN]
TERMINAL APPLICATION SPECIFICATION		114-1016	-
	-	-	-
TERMINALS APPLIED			
TE TERMINAL	TE TERMINAL	TE TERMINAL	TE TERMINAL
3-770060-1			

WIRE SIZE		CRIMP HEIGHT mm [INCH]		WIRE CRIMPER PART NUMBER	STABILIZER CRIMP HEIGHT mm [INCH]	STABILIZER CRIMPER PART NUMBER	CRIMP HEIGHT REFERENCE SETTING 
14 AWG		1.40 +/- 0.05 [.055 +/- .002]		32-456408-5	2.75 +/- 0.10 [.108 +/- .004]	3815664-6	7.6
18-16 AWG		1.09 +/- 0.05 [.043 +/- .002]		42-456408-6	2.40 +/- 0.10 [.094 +/- .004]	4815664-7	7.8




1. RECOMMENDED SPARE PARTS
2. GREASE BEARING SURFACES LIGHTLY
3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
4. APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151314-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151314-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151314-5
5. ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.
6. APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEMS 62 & 242.
7. GREASE THREADS, GROOVE AND O-RING ON ITEMS 139 & 152.

```
*WARNING
ON INSTALLATION, SET WIRE DISC, ITEM 40 TO
LARGEST WIRE SIZE SETTING. USE OF SETTINGS
BELOW MINIMUM REQUIRED CRIMP HEIGHT SETTING
WILL CAUSE DAMAGE TO CRIMP TOOLING.
```

PACIFIC VERSION
(Atlantic version shown on sheets 1 of 4 & 2 of 4)
Shown on sheets 3 of 4 & 4 of 4

						2					1
SET UP GAUGE 2119599-1						LOC A	DIST 66	REVISIONS			
		P	LTR	DESCRIPTION		DATE	DWN	APRD			
			-	SEE SHEET 1		-	-	-			
△ ₄	1	-	1	1	1	2-456408-6	CRIMPER, WIRE PREMIUM	256			
△ ₄	1	-	1	1	1	815664-7	CRIMPER, WIRE-O	255			
△ ₃	1	-	1	1	1	2-456408-5	CRIMPER, WIRE PREMIUM	254			
△ ₃	1	-	1	1	1	815664-6	CRIMPER, WIRE-O	253			
		-	1	1	1	2119782-1	FINE ADJUST HEAD ASM, PACIFIC STYLE	251			
		-	-	1	-	2119640-1	PUSH ROD, AIR FEED	250			
		-	-	1	-	2079988-1	BUSHING, LCH5-12, MISUMI	249			
		-	1	1	1	1-22279-3	SPRING, COMPRESSION	246			
		-	1	1	1	2119082-6	CAM, SNAIL, INSULATION ADJUSTMENT	244			
		-	1	1	1	2079764-1	WASHER, WAVE SPRING, CREST-TO-CREST	243			
△ ₆		-	1	1	1	2119083-1	RETAINER, INSULATION DIAL	242			
		-	1	1	1	7-18023-7	SCR, SKT HD CAP M3 X 4.0	241			
		-	2	-	-	2168400-6	SHCS, LOW HEAD, RoHS, M5 X 16	240			
		-	-	-	1	2119580-1	MECHANICAL FEED ASSEMBLY	239			
		-	-	1	-	2063440-1	AIR FEED MODULE	238			
		-	-	1	-	2119740-2	TAG IDENTIFICATION	213			
		-	-	1	-	1901094-3	SPACER, FEEDER	198			
△ ₂ △ ₁		-	1	1	1	7-456408-6	CRIMPER, WIRE PREMIUM	178			
		-	-	2	-	21045-3	RING, RETAIN, EXTERN, 3/16 CRESCENT	172			
		-	1	1	1	994969-1	MAGNET, RARE EARTH HIGH ENERGY	166			
		-	REF	REF	REF REF	994970-2	COUNTER, MAGNETIC	164			
		-	-	1	-	240638-1	SPRING, FEED FINGER	163			
		-	1	1	1	8-21084-1	O-RING, .801 ID, .070 DIA. MAT.	152			
		-	-	1	-	2119641-2	FEED CAM, AIR FEED	151			
		-	1	1	1	2119798-2	DETENT PIN	145			
		-	1	1	1	2079383-8	SCR, BHSC, RoHS (M4 X 16)	144			
		-	4	4	4	2168400-5	SHCS, LOW HEAD, RoHS, M4 X 20	143			
		-	-	-	1	2119653-2	FEED CAM, POST FEED	142			
		-	1	1	1	1-2119656-0	APPLICATOR BASIC ASSEMBLY, SF	141			
		-	1	1	1	2119650-1	RAM, ASIAN STYLE, SIDE FEED	140			
		-	1	1	1	2119092-2	BOLT, ADJUSTMENT	139			
		-	-	1	-	3-23627-7	PIN, RETAIN, GRVD, 3/16 X .854	137			
		-	-	1	-	2119799-1	HOLDER, FEED FINGER, AF	136			
		-	-	REF	-	SEE NOTE 4	MEMORY CHIP, PROGRAMMED	135			
		-	-	1	-	1633743-1	SERVO FEED LATCH ASM	133			
		-	1	1	1	1-18028-2	WASHER, FLAT, REG M4	119			
		-	-	REF	-	2119944-1	FEED FINGER ASSEMBLY,SF	117			
		-	1	1	1	455888-5	SPACER, CRIMPER	82			
		-	1	1	1	2119956-1	DOCUMENTATION PACKAGE	71			
		-	1	-	1	2119740-1	TAG IDENTIFICATION	67			
		-	2	2	2	2168078-1	SCREW, DRIVE, RH, RoHS, 2 x .188	66			
		-	1	1	1	2119793-1	LIMITER, ADJUSTMENT BOLT	63			
△ ₆		-	3	3	3	992763-5	SCR, SET, SOC, CONE POINT, M3 x 4.0	62			
		-	-	1	1	5-18022-5	SCR, HEX HD CAP, M4 X 6.0	59			
		-	-	1	1	1338685-1	PAWL, FEED	56			
		-	-	-	2	18023-9	SCR, SKT HD CAP M4 X 6.0	49			
		-	-	-	1	2119652-1	FEED CAM, PRE FEED	48			
		-	1	1	1	2079383-7	SCR, BHSC, RoHS (M8 X 25)	41			
		-	1	1	1	2119645-1	DISC, NUMBERED FA WIRE ADJUSTMENT	40			
		-	1	1	1	2119957-1	APPLICATOR SHIM PACK	39			
		-	1	1	1	2119644-5	RAM WASHER, PRECISION	38			
		-	1	1	1	469465-4	STOP, WIRE	34			
		-	2	2	2	2079383-5	SCR, BHSC, RoHS (M4 X 20)	33			
		-	1	1	1	2161328-1	HEX HEAD, FLANGED, M5 x 8mm LONG	32			
		-	1	1	1	1-1320908-0	SPACER, STRIP GUIDE	30			
		-	1	1	1	2119959-1	ASSEMBLY, STRIP GUIDE	29			
		-	1	1	1	455888-3	SPACER, CRIMPER	28			
		-	1	1	1	1320928-2	STRIP GUIDE	24			
		-	1	1	1	2168083-2	SCR, SKT HD CAP, RoHS, M4 X 8.0	21			
		-	1	1	1	1-18028-2	WASHER, FLAT, REG M4	20			
		-	1	1	1	2119533-3	STRIPPER, SIDE FEED	19			
△ ₁		-	1	1	1	2119806-1	INSERT, SHEAR	13			
		-	1	1	1	3-22280-3	SPRING, COMPRESSION	12			
		-	1	1	1	1-356885-4	STOP, SHEAR	11			
△ ₁		-	1	1	1	2119805-1	SHEAR HOLDER, FRONT	10			
△ ₁		-	1	1	1	462006-6	FLOATING SHEAR, FRONT	9			
△ ₁	1	1	1	1	1	1633923-5	ANVIL, COMBINATION	8			
		-	-	-	-	-	-	7			
		-	-	-	-	-	-	6			
		-	1	1	1	1-2119757-2	DEPRESSOR, SHEAR	5			
		-	1	1	1	238011-8	BLOCK, CRIMPER SPACER	4			
△ ₁	1	1	1	1	1	6-2119582-7	CRIMPER, INSULATION F PREMIUM	3			
		-	1	1	1	455888-7	SPACER, CRIMPER	2			
△ ₂ △ ₁	1	1	1	1	1	815664-2	CRIMPER, WIRE-O	1			

THIS DRAWING IS THE PROPERTY OF THE COMPANY. IT IS TO BE USED FOR THE PURPOSES SPECIFIED ONLY. IT IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF THE COMPANY. IT IS TO BE KEPT IN THE COMPANY'S POSSESSION AND SHOULD BE CONTROLLED FOR THE LATEST VERSION.		DWN L. GROSS 31JAN2013 CIP T. ELBIN 31JAN2013 AVO M. CLIFFORD 31JAN2013		 TE Connectivity Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±0.0001		NAME Ocean Side Feed Applicator	
		PRODUCT SPEC APPLICATION SPEC		SIZE A1 00779 C=2151314	
MATERIAL -		FINISH -		DRAWING NO -	
WEIGHT -		RESTRICTED TO -		SCALE 1:2	
SHEET 3		OF 4		REV B1	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
A	66	-	-	SEE SHEET 1	-	-	-

D

C

B

A


D

C


B

A


FEED TYPE MECHANICAL

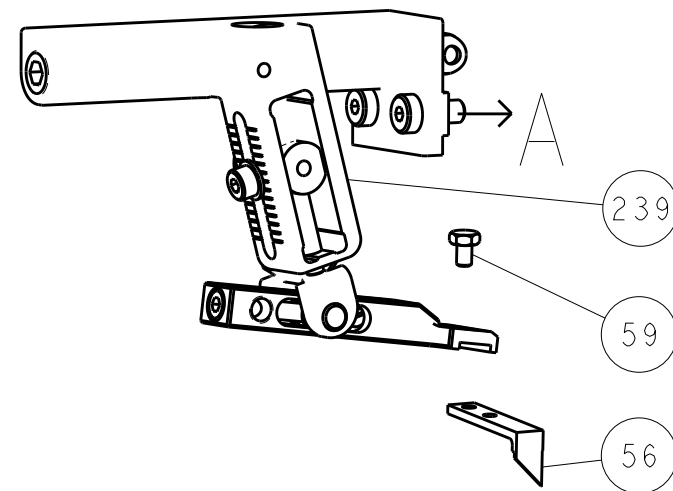






PNEUMATIC

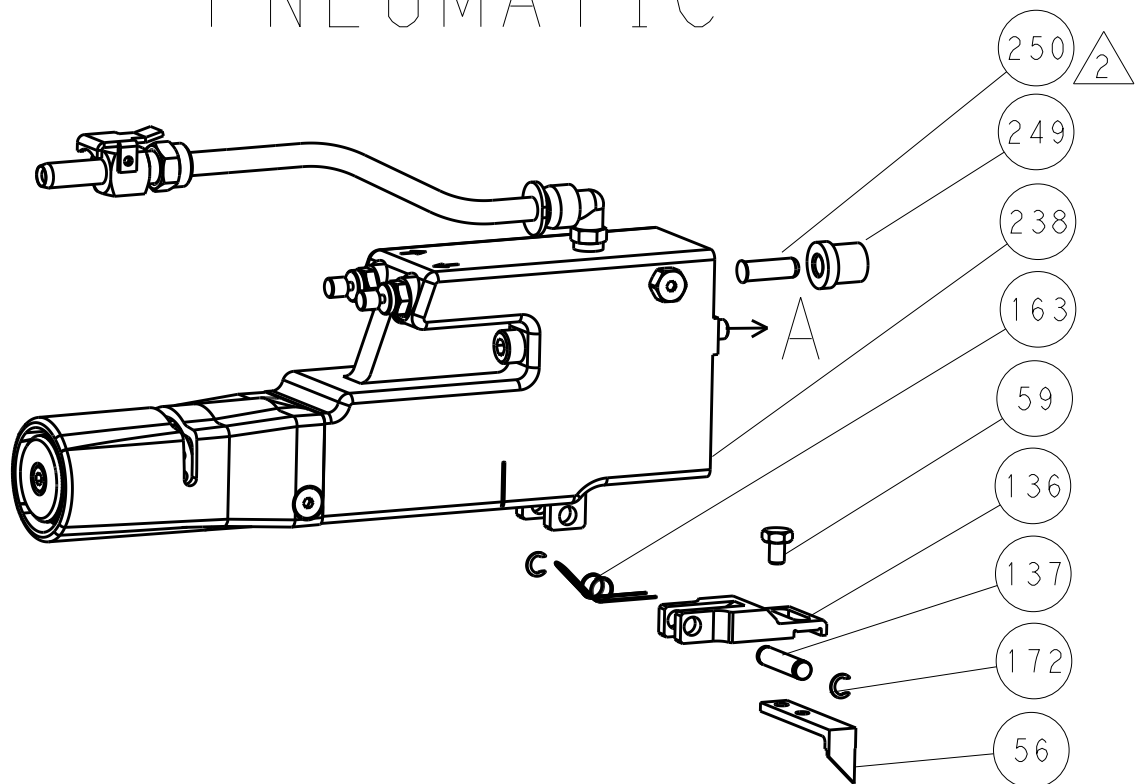

SERVO LATCH PLATE

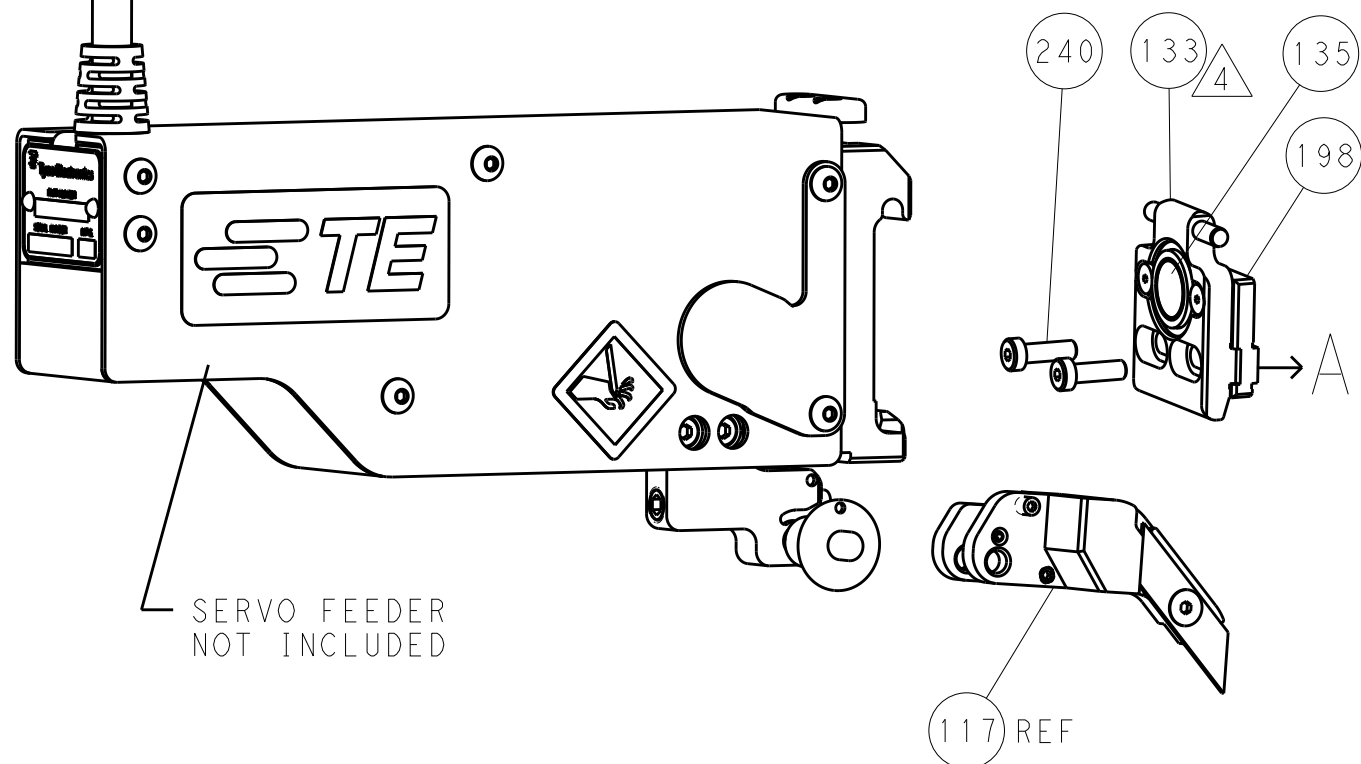

CAM POSITIONS

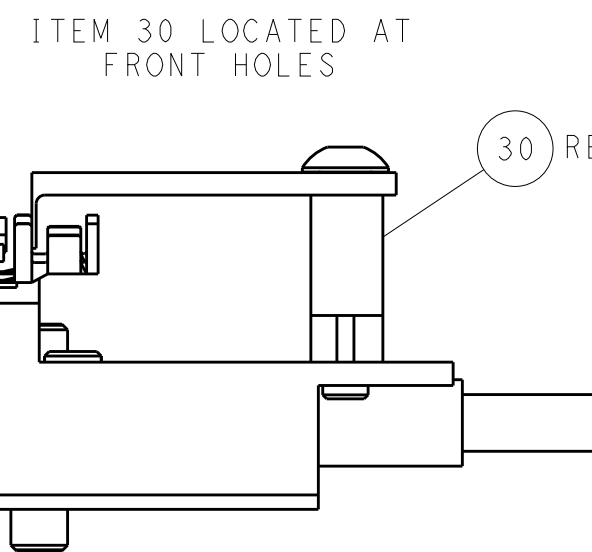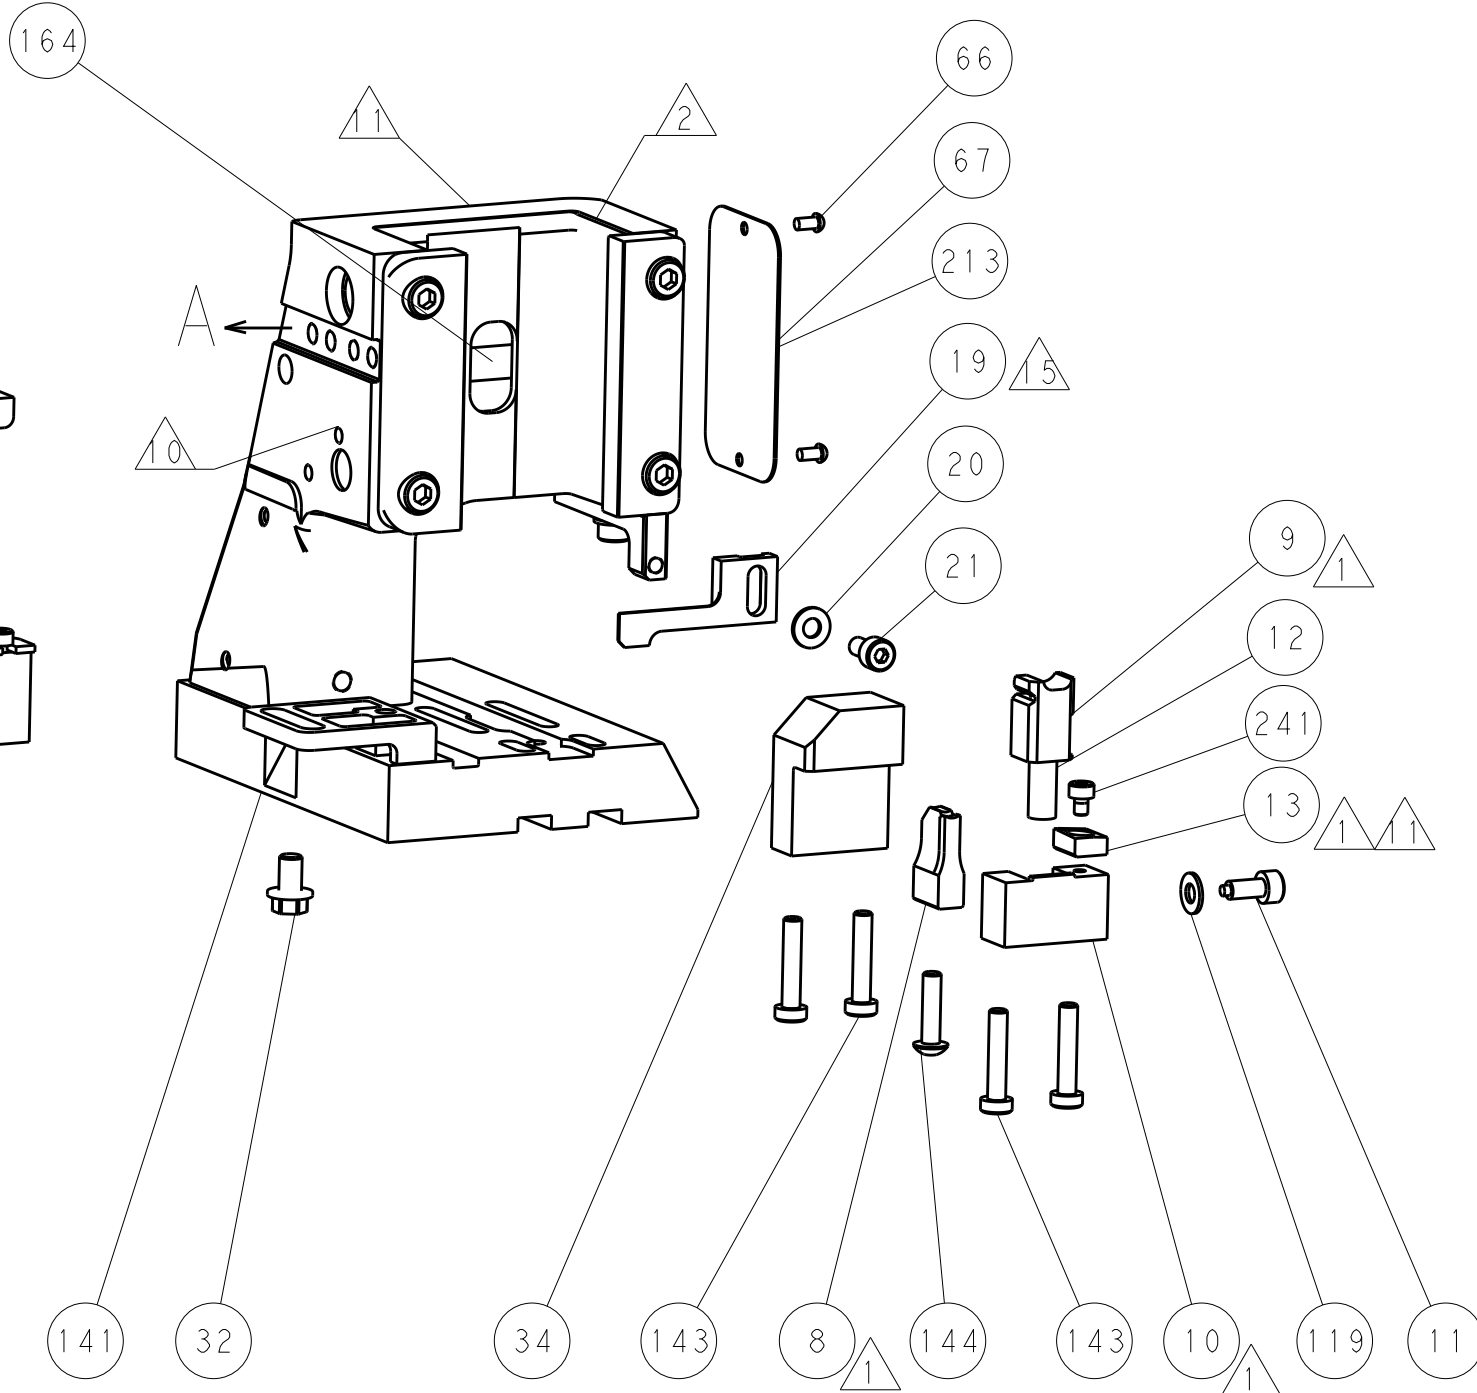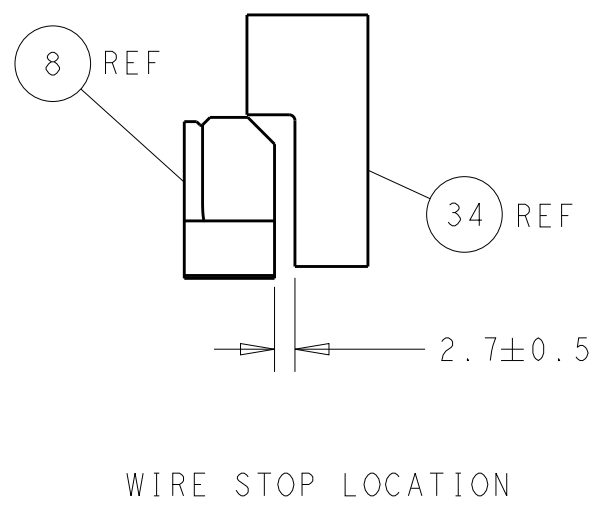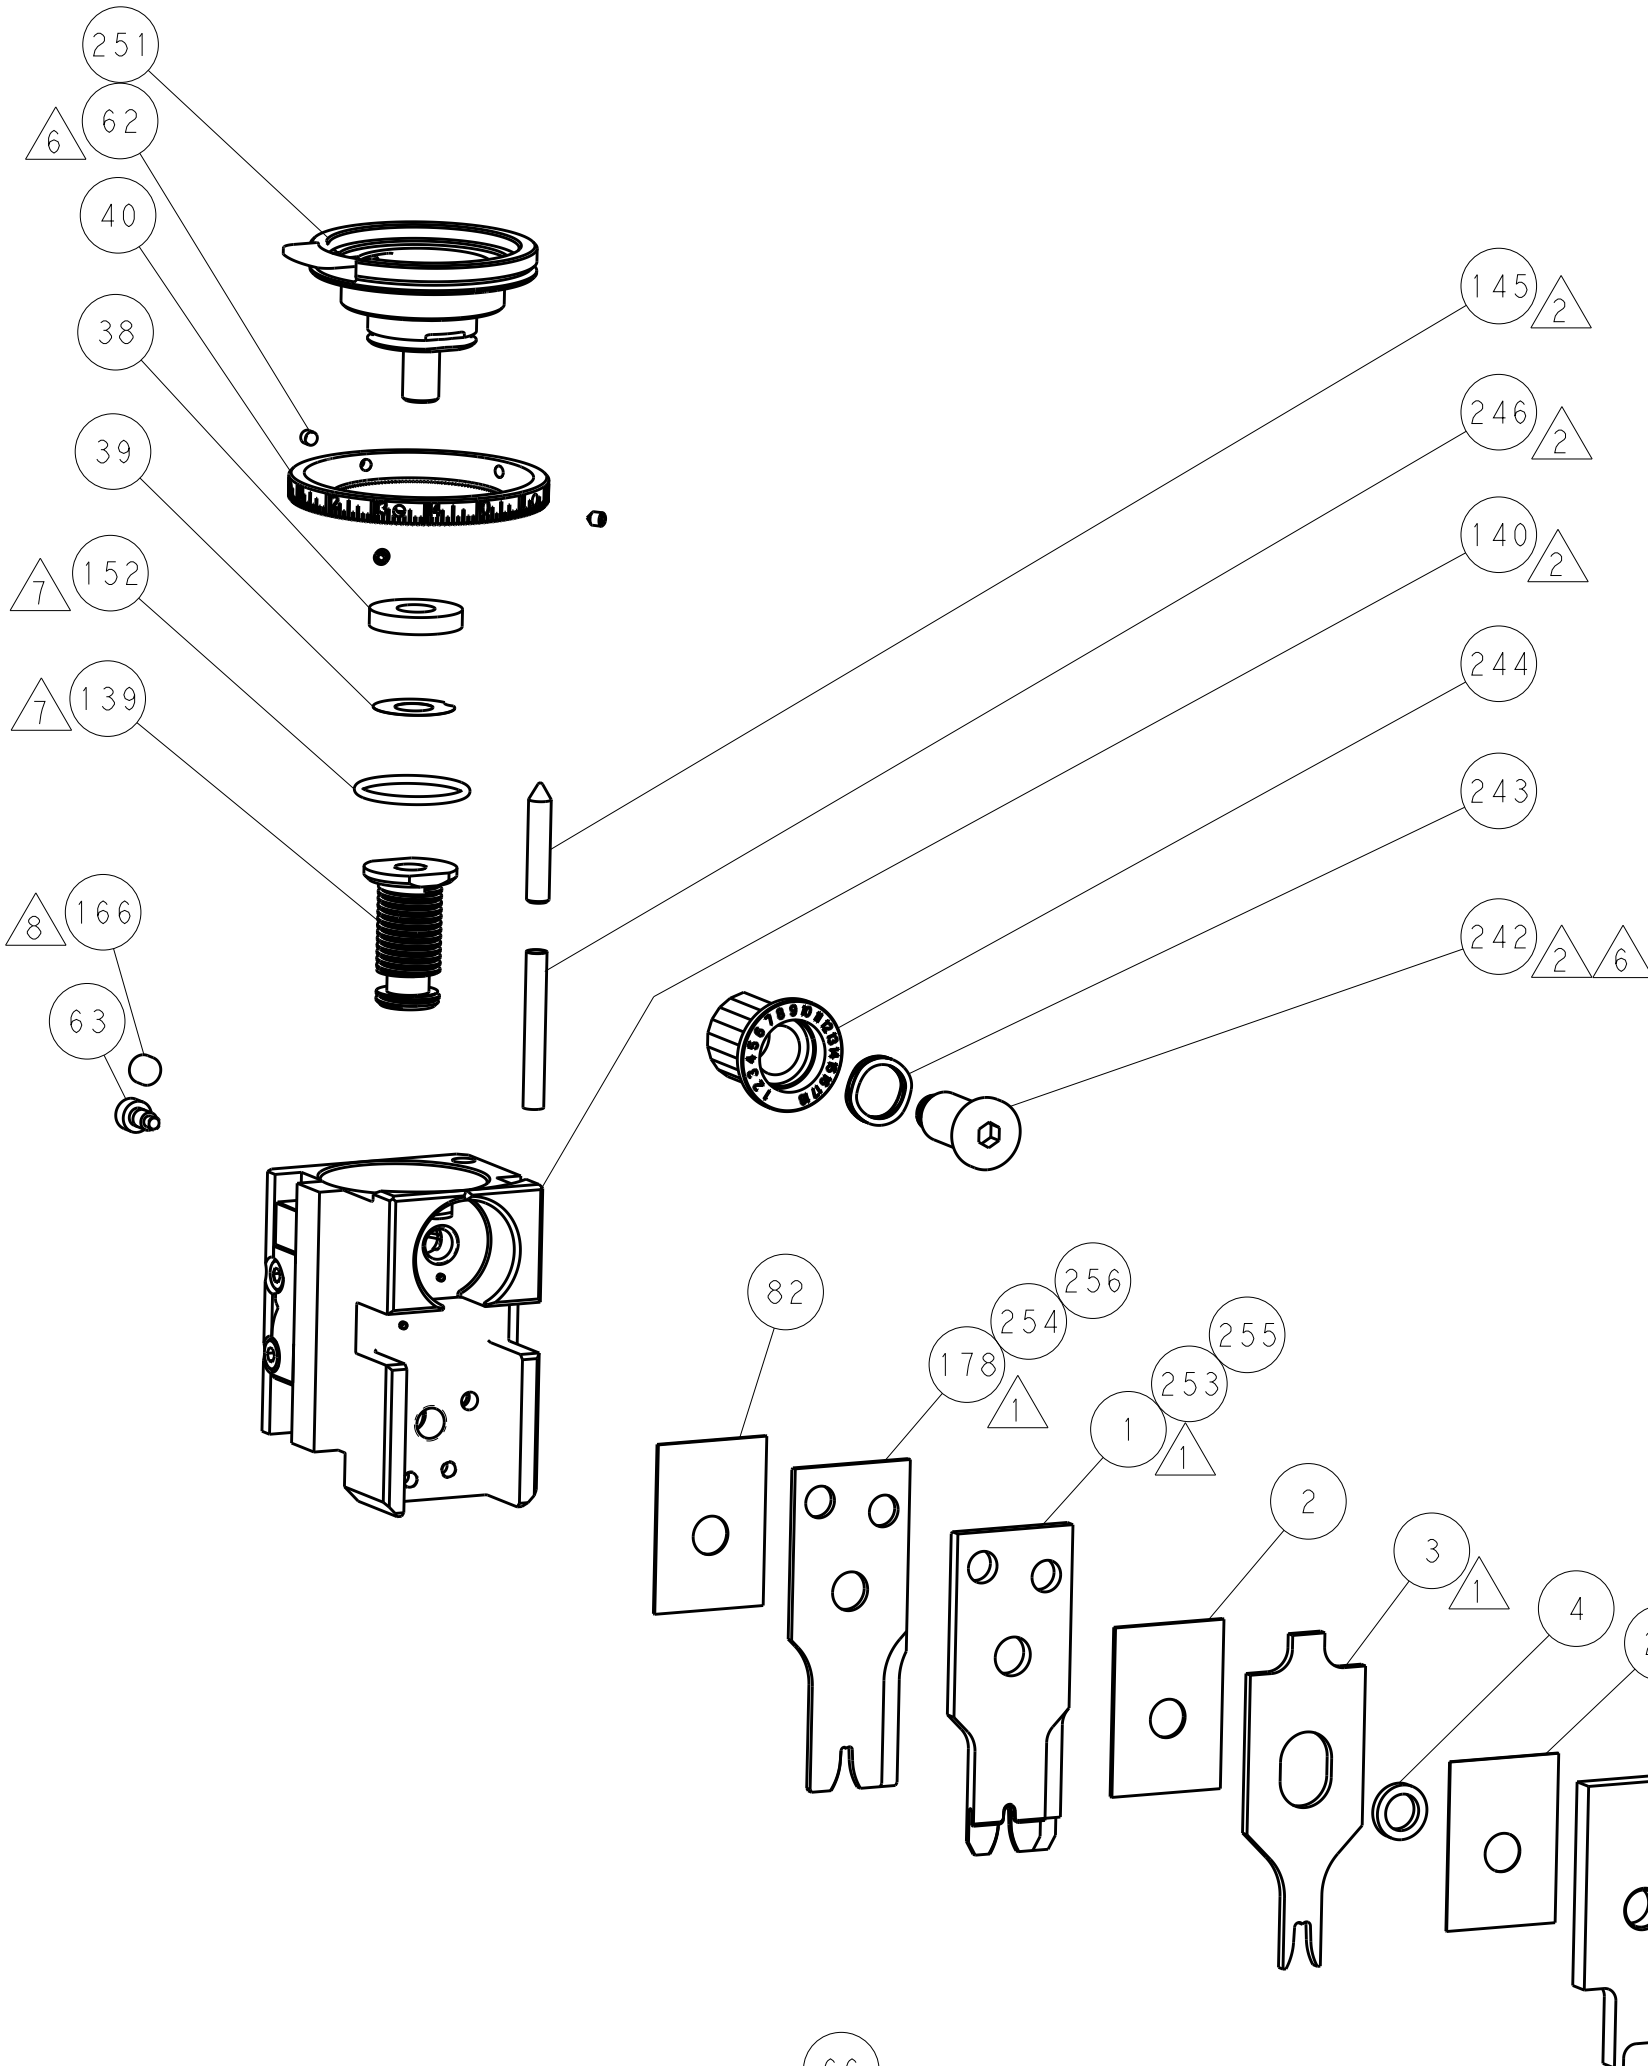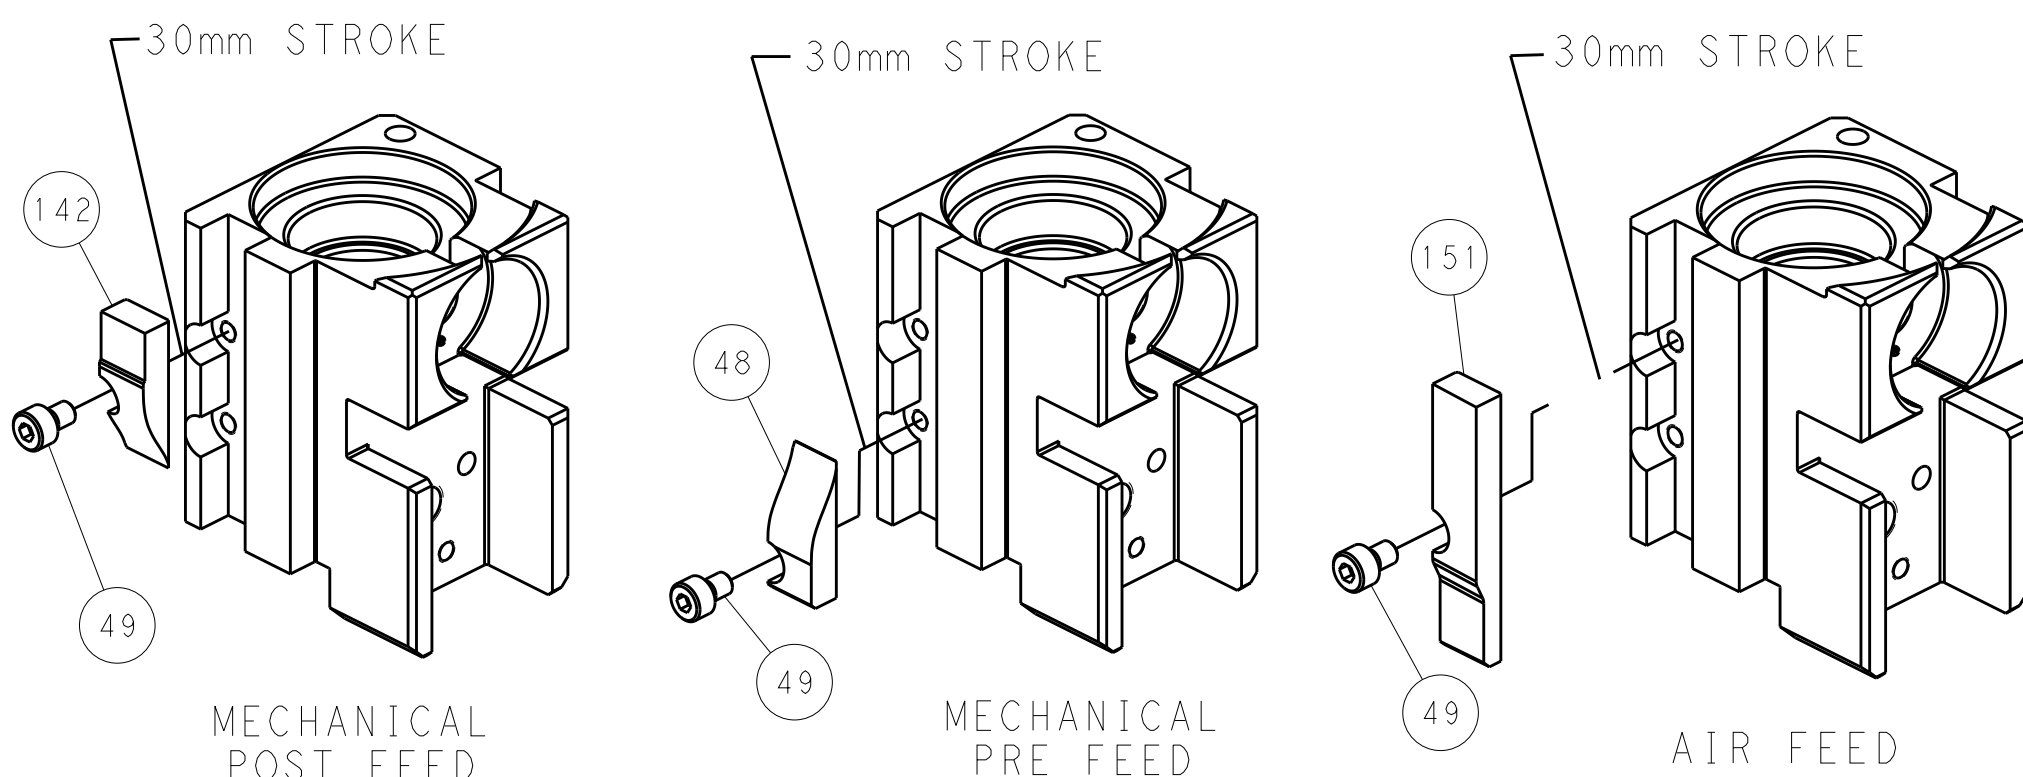

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN		31JAN2013		TE Connectivity	
mm		0 PLC ±0.5		CHK		31JAN2013		Harrisburg, PA 17105-3608	
		1 PLC ±0.13		APVD		31JAN2013		NAME	
		2 PLC ±0.013		M. CLIFFORD				Ocean Side Feed	
		3 PLC ±0.001						Applicator	
		4 PLC ±0.001							
MATERIAL		FINISH		WEIGHT		A1		00779 ©=2151314	
						Customer Accessible Production Drawing		SCALE 1:2 SHEET 4 OF 4 REV B1	

SHEETS 1 & 2 ARE NOT REQUIRED FOR PACIFIC VERSION

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9