

MATERIALS: BASE: PPS UL94V-O COVER: PPS UL94V-O ACTUATOR: LCP UL94V-O MOVING CONTACT: COPPER ALLOY, GOLD OVER NICKEL PLATE FIXED CONTACT/TERMINAL: COPER ALLOY, GOLD OVER NICKEL PLATE	C5	REVISED PER ECO-18-018834
	C6	REVISED PER ECO-17-007191

CONTACT RATING: NON-SWITCHING 100mA @ 50 VDC
SWITCHING: 25mA @ 24 VDC.

INITIAL CONTACT RESISTANCE: 100mΩ MAX. @ 2 VDC, 10 mA.
INSULATION RESISTANCE: 100 MEGOHMS MIN. @ 100 VDC.
DIELECTRIC STRENGTH: 300 VAC. 1 MINUTE.
LIFE: 1,000 CYCLES.


OPERATING FORCE: 600G MAX.

OPERATING TEMPERATURE: -22°F TO +185°F (-30°C TO +85°C).
STORAGE TEMPERATURE: -49°F TO +212°F (-45°C TO +100°C).
SOLDER HEAT RESISTANCE PER 109-201, CONDITION B
SOLDERABILITY PER JIS C 0050 & JIS C 0053

- | | |
|---|---|
| 1 | PARTS WITH 'ON' SUFFIX SUPPLIED IN THE ON POSITION. |
| 2 | SUPPLIED WITH TAPE SEAL STANDARD. |
| 3 | FOR TAPE AND REEL PACKAGING— PART NO. GDHXXSTR
SEE MODEL NUMBER CHART BELOW. |
| 4 | FOR NO SEAL OPTION = NS. |
| 5 | ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE
2002/95/EC OF 27 JAN 2003 (ROHS) |
| 6 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

4	1	6.35[.250]	8.74[.344]	6	TAPE	GDH06STRON04	1-1571983-7
		11.43[.450]	13.82[.544]	10	NONE	GDH010STRNS04	1-1571983-6
		1.27[.050]	3.66[.144]	2	TAPE	GDH02STRON04	1-1571983-5
		11.43[.450]	13.82[.544]	10	TAPE	GDH010STR04	1-1571983-4
	OBSOLETE	11.43[.450]	13.82[.544]	10	TAPE	GDH010S04	1-1571983-3
		8.89[.350]	11.28[.444]	8	NONE	GDH08STRNS04	1-1571983-2
		8.89[.350]	11.28[.444]	8	TAPE	GDH08STR04	1-1571983-1
		8.89[.350]	11.28[.444]	8	TAPE	GDH08S04	1-1571983-0
		6.35[.250]	8.74[.344]	6	TAPE	GDH06STR04	1571983-9
		6.35[.250]	8.74[.344]	6	TAPE	GDH06S04	1571983-8
4	1	3.81[.150]	6.20[.244]	4	TAPE	GDH04STRON04	1571983-7
		3.81[.150]	6.20[.244]	4	NONE	GDH04STRNS04	1571983-6
	OBSOLETE	3.81[.150]	6.20[.244]	4	TAPE	GDH04STR04	1571983-5
		3.81[.150]	6.20[.244]	4	TAPE	GDH04S04	1571983-4
		1.27[.050]	3.66[.144]	2	TAPE	GDH02STR04	1571983-3
16	OBSOLETE	1.27[.050]	3.66[.144]	2	TAPE	GDH02SON04	1571983-2
		1.27[.050]	3.66[.144]	2	TAPE	GDH02S04	1571983-1
		M	L	POLE	SEAL	OLD T&B P/N	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 15MAR05		 TE Connectivity							
		CHK M SARVER 15MAR05									
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME DIP SWITCH GDH SERIES							
		0 PLC ± - 1 PLC ± - 2 PLC ± 0.25 [0.010] 3 PLC ± - 4 PLC ± - ANGLES ± 1°									
MATERIAL		FINISH									
-		-		SIZE A2		CAGE CODE 00779		DRAWING NO C-1571983		RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 8:1		SHEET 1 of 2		REV C6			

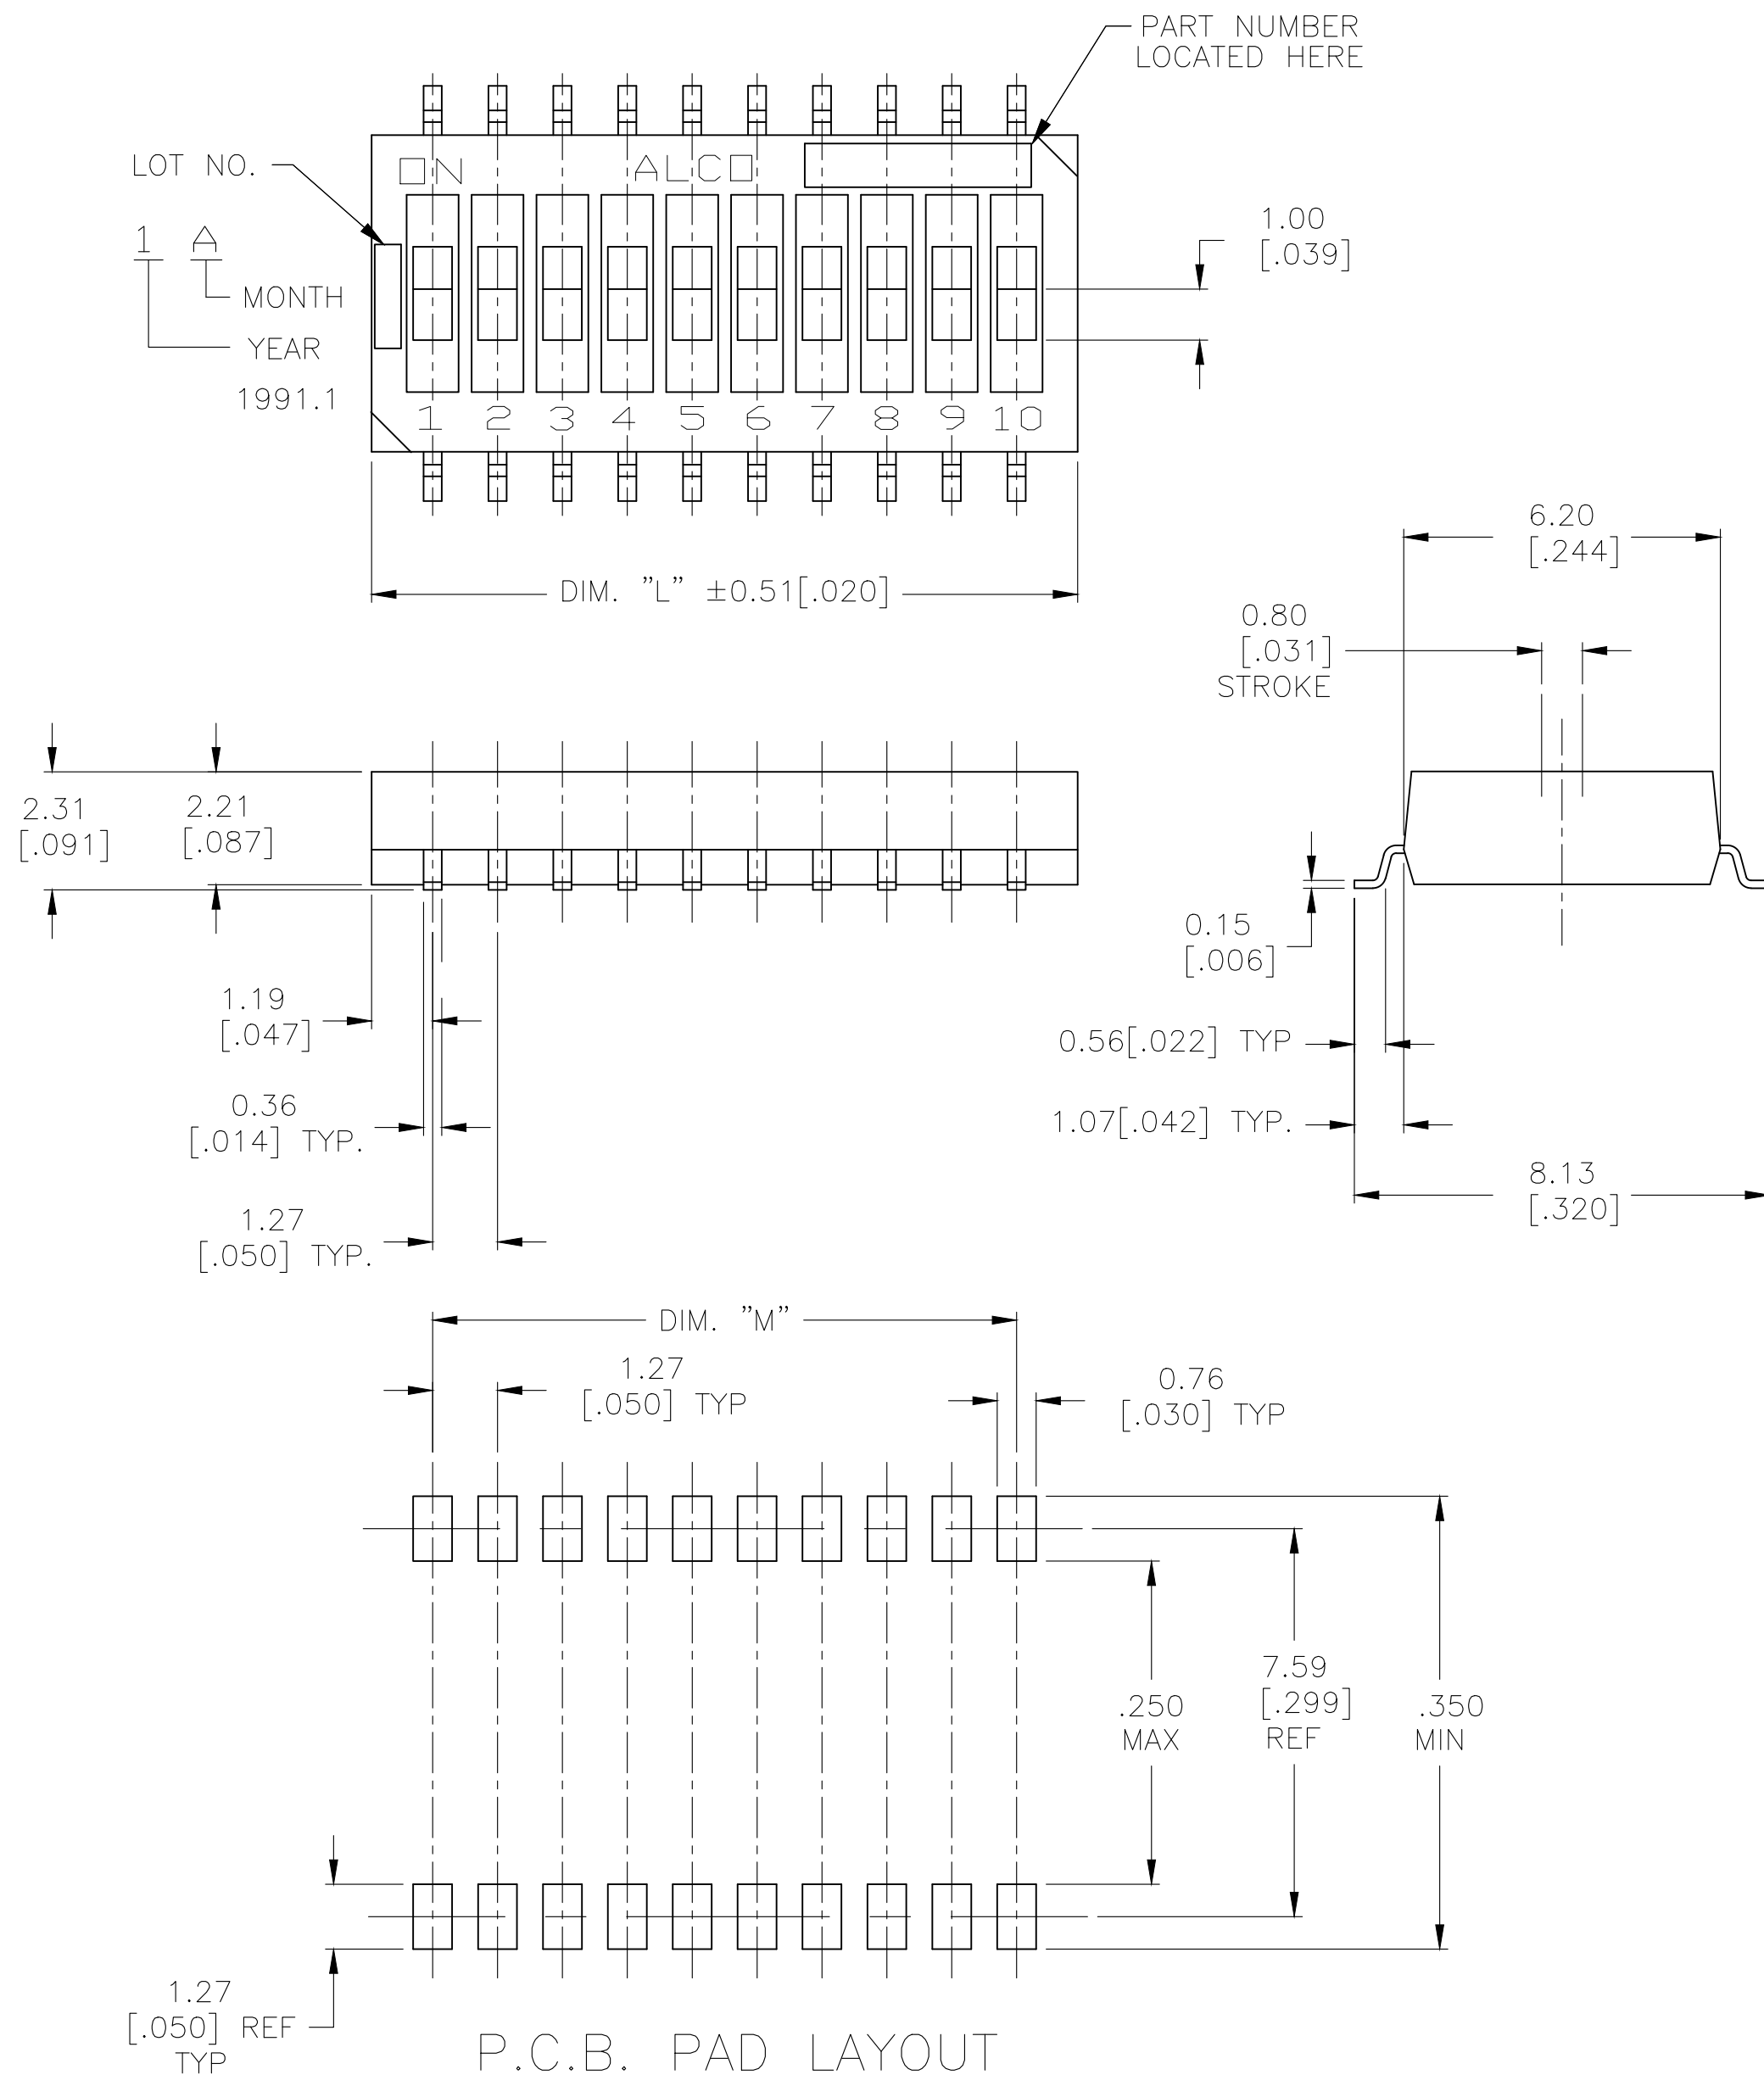

PCB LAYOUT TOLERANCES $\pm .002$
ON ALL DIMENSIONS

1571983

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN 15MAR05 CHK M SARVER 15MAR05 APVD M SARVER 15MAR05		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME DIP SWITCH GDH SERIES	
		PRODUCT SPEC —			
0 PLC ± — 1 PLC ± — 2 PLC ± 0.25 [.010] 3 PLC ± — 4 PLC ± — ANGLES ± 1°		APPLICATION SPEC —			
MATERIAL —		FINISH —		SIZE A2	CAGE CODE 00779
		WEIGHT —		DRAWING NO C-1571983	
		CUSTOMER DRAWING		SCALE 8:1	SHEET 2 of 2
				REV C6	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9