


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW DRAWING	09FEB2016	NK	RH

D


C

B





A

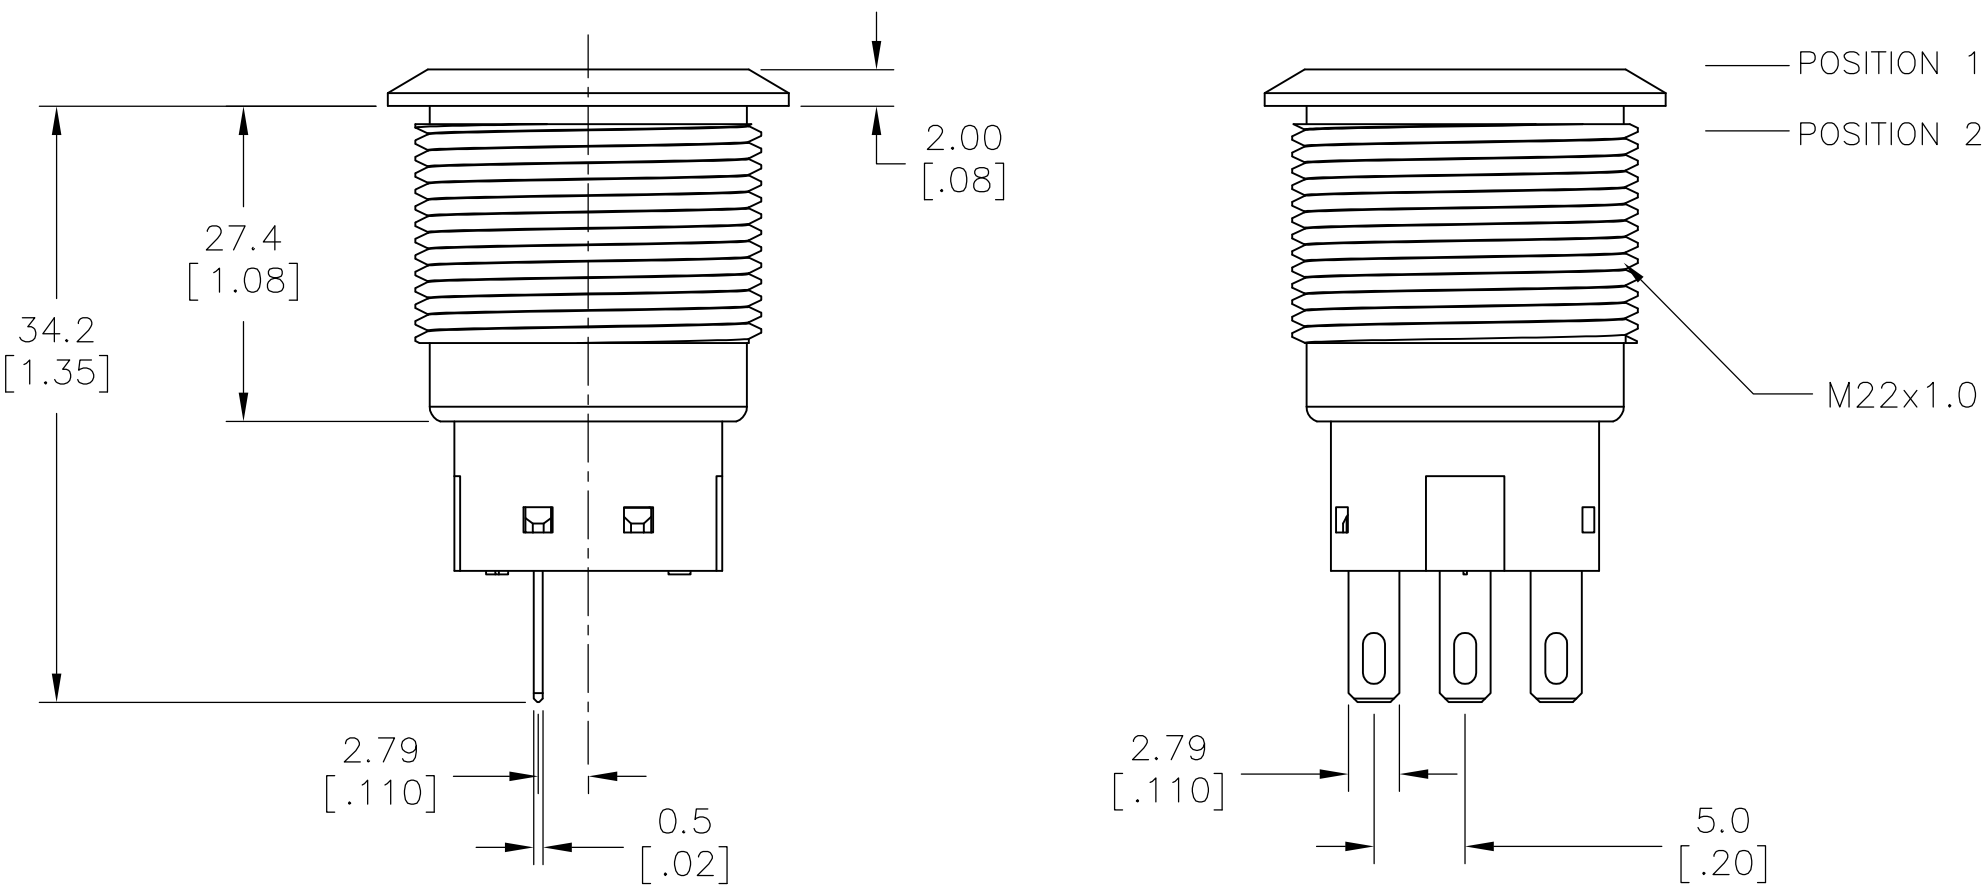


POSITION 1



POSITION 2

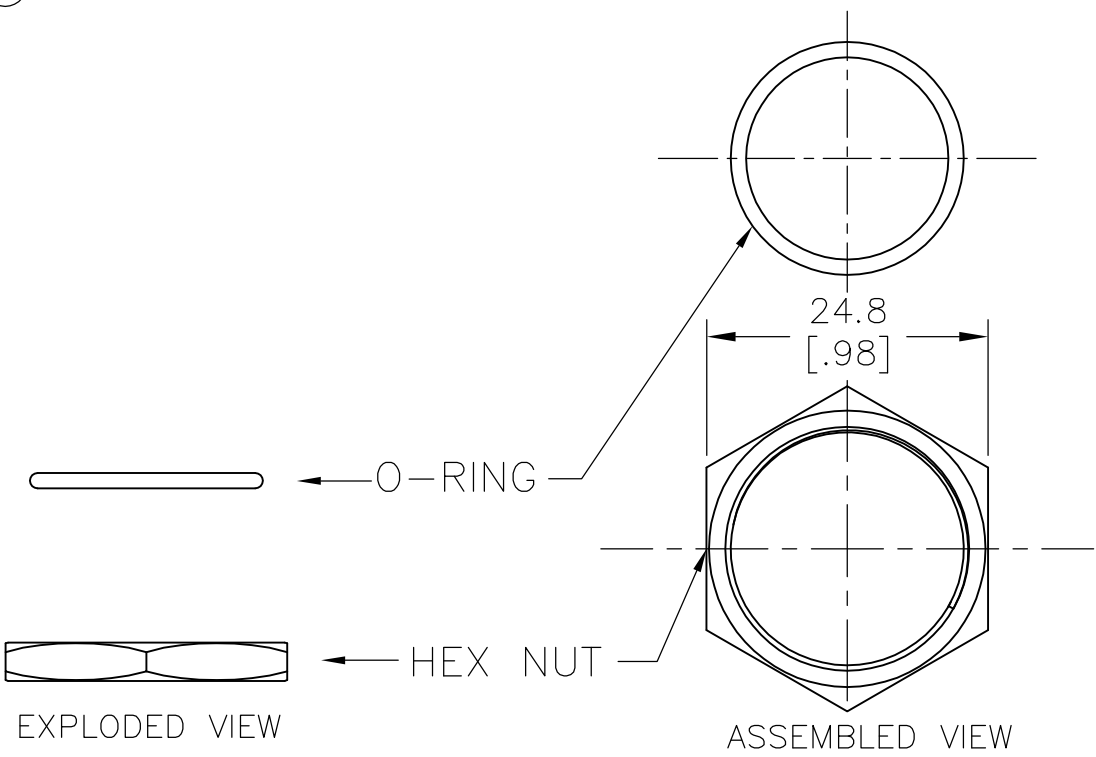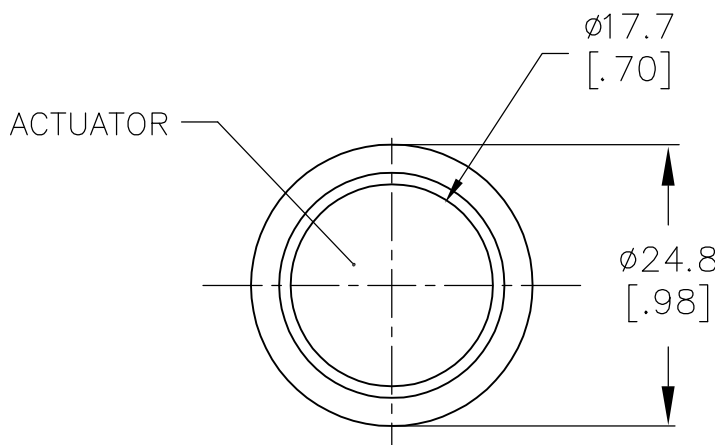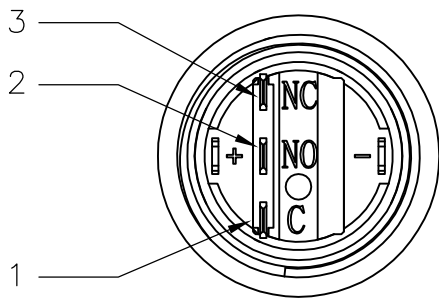

PANEL CUTOUT
MAX.PANEL THICKNESS: 10.00[.394]

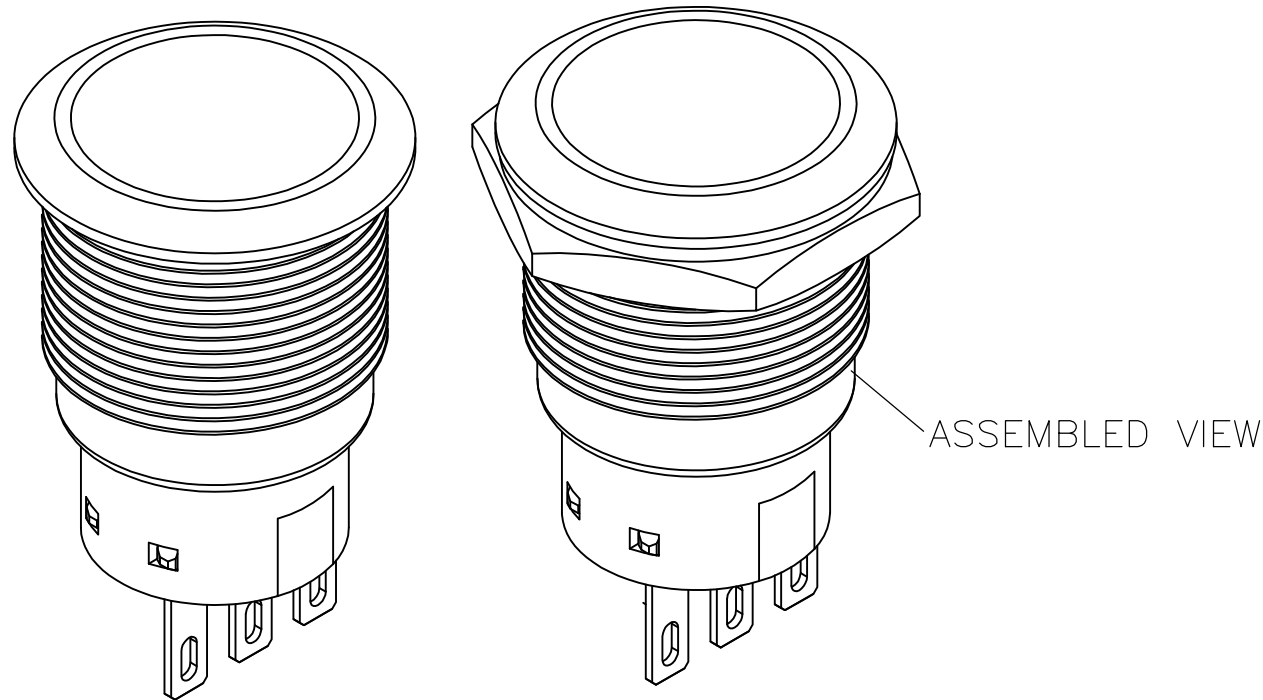

SPECIFICATIONS

CONTACT RATING: SILVER: 3A @ 250 VAC RESISTIVE
GOLD: 0.4VA @ 20VDC OR PEAK AC
INSULATION RESISTANCE: 1,000M Ω MIN AT 500VDC
DIELECTRIC STRENGTH: 2,000V RMS @ SEA LEVEL
CONTACT RESISTANCE: 50 m Ω MAX @ 1A 12VDC (INITIAL VALUE)
ELECTRICAL LIFECYCLES: 50,000 MAKE AND BREAK CYCLES AT FULL LOAD

ACTUATION FORCE: SP: 2.5 $\pm$ 1 NEWTON, DP: 3.5 $\pm$ 1 NEWTON
ACTUATION TRAVEL: 3.2mm
SEALED PER IP67, IK10 (STAINLESS)
OPERATING TEMPERATURE: -20°C TO +55°C
MECHANICAL LIFECYCLES: MOMENTARY: 1,000,000 CYCLES
LOCKING: 500,000 CYCLES
HARDWARE TORQUE: 5-14 N-m




MATERIALS

BUSHING: STAINLESS STEEL
BASE: PBT (UL 94-V0), PC (UL 94-V2)
ACTUATOR: STAINLESS STEEL, PC
SEALING: O-RING (SILICONE)
TERMINAL/CONTACT: COPPER BASE, SILVER/GOLD PLATED
HEX NUT: BRASS BASE, NICKEL PLATED


1 ALL MATERIAL AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 09FEB2016	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK HILL RYAN 09FEB2016				
		APVD HILL RYAN 09FEB2016	NAME			
		PRODUCT SPEC	ANTI-VANDAL SWITCH 22mm NO LED			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
0 PLC $\pm$ - 1 PLC $\pm$ - 2 PLC $\pm$ - 3 PLC $\pm$ - 4 PLC $\pm$ - ANGLES $\pm$ -		FINISH	A2	00779	C=2213771	-
MATERIAL		WEIGHT	CUSTOMER DRAWING			
-		-	SCALE	8:1	SHEET	1 OF 3
					REV	A



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

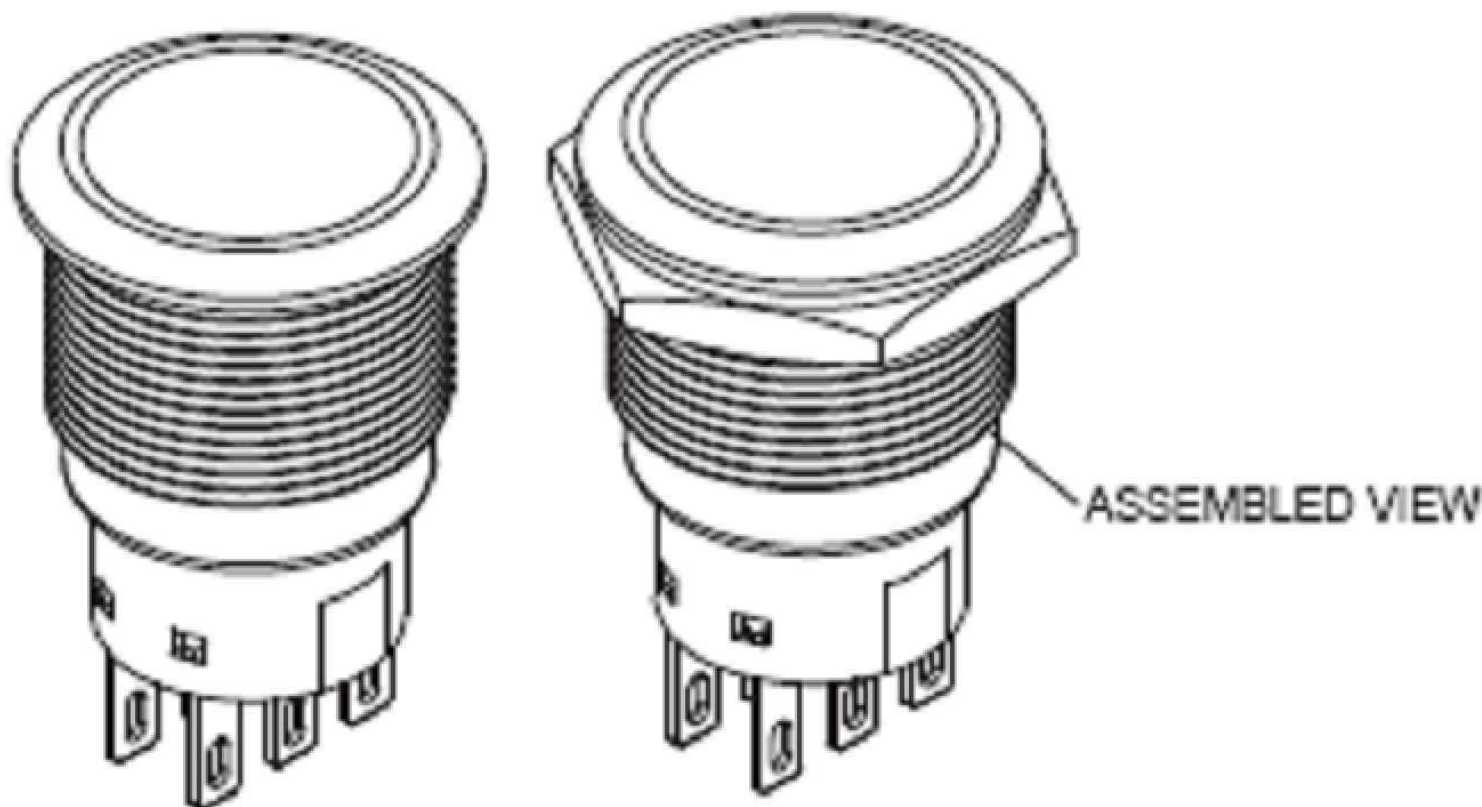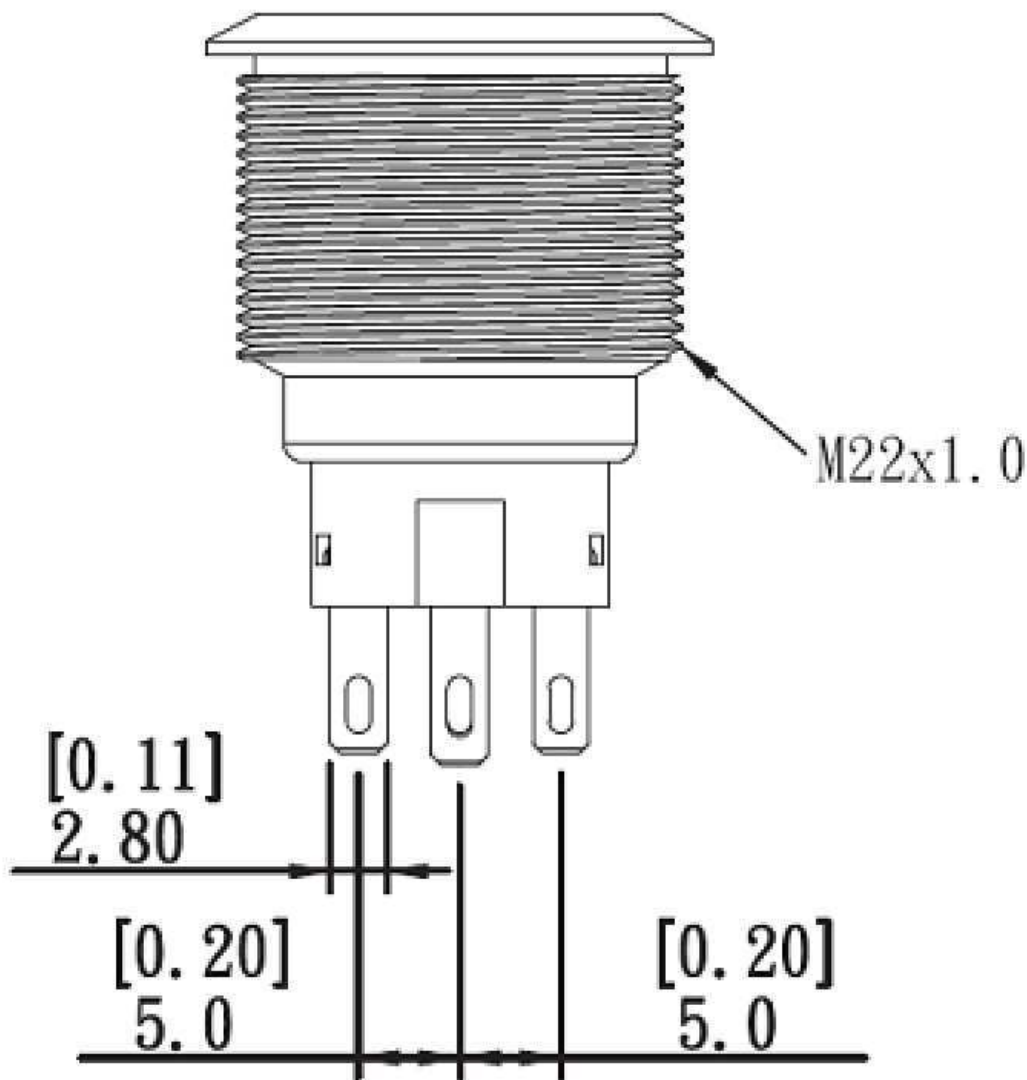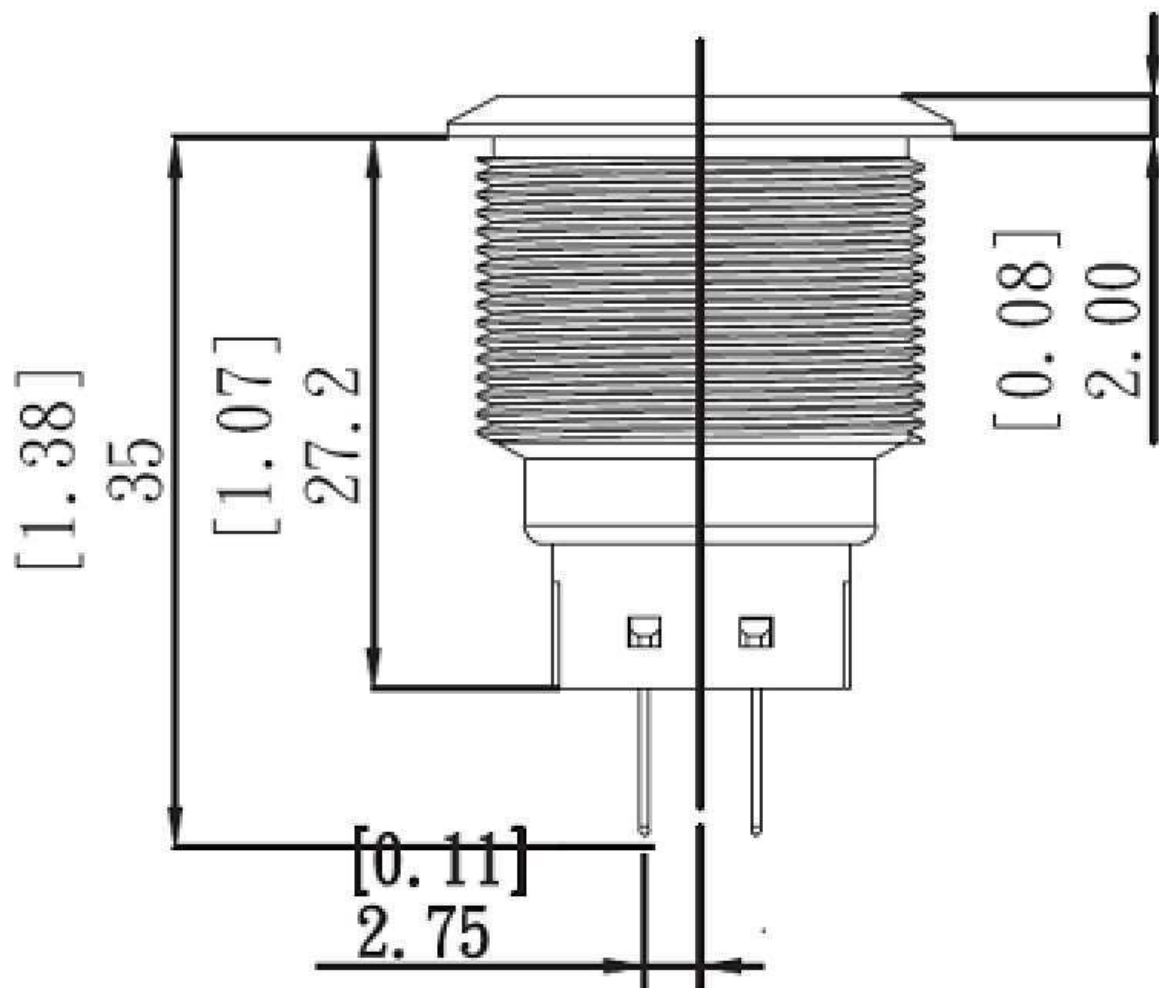

POSITION 1

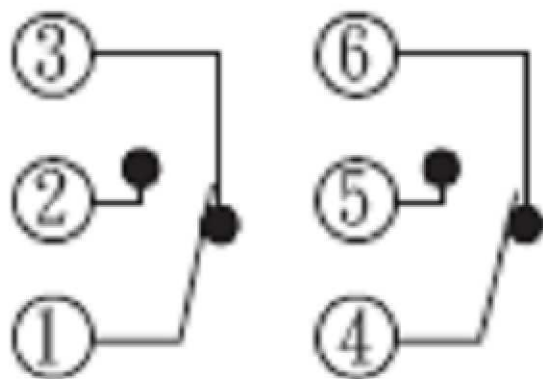

POSITION 2

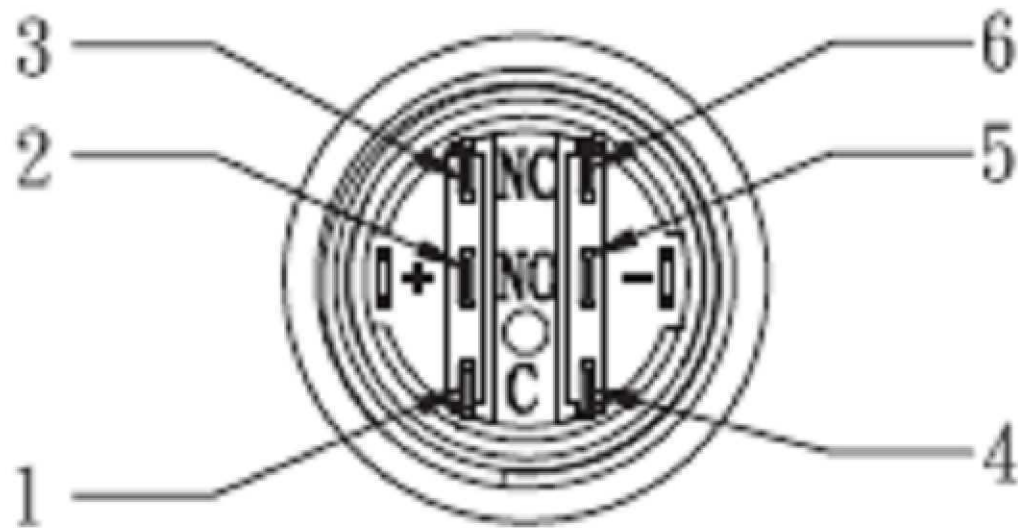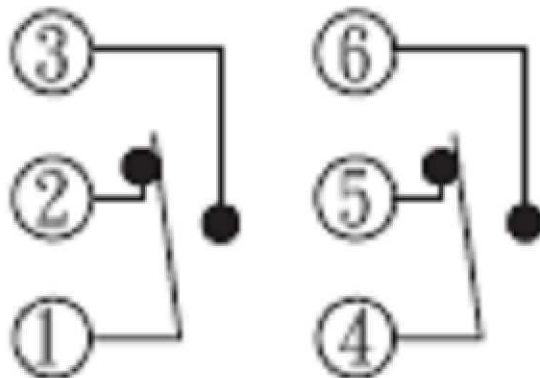

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN NAGALAKSHMI K 09FEB2016	TE Connectivity		
		CHK HILL RYAN 09FEB2016			
		APVD HILL RYAN 09FEB2016	NAME		
		PRODUCT SPEC	ANTI-VANDAL SWITCH 22mm NO LED		
		APPLICATION SPEC			
		WEIGHT	SIZE A2	CAGE CODE 00779	DRAWING NO C=2213771
		CUSTOMER DRAWING	SCALE NTS	SHEET 2 OF 3	REV A

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - SEE SHEET 1

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

DOUBLE POLE
-LOCKING

GOLD

-

-

AV2221000R04

2213771-8

DOUBLE POLE
-LOCKING

SILVER

-

-

AV2221000Q04

2213771-7

DOUBLE POLE-
MOMENTARY

GOLD

-

-

AV2220000R04

2213771-6

DOUBLE POLE-
MOMENTARY

SILVER

-

-

AV2220000Q04

2213771-5

SINGLE POLE-
LOCKING

GOLD

-

-

AV2211000R04

2213771-4

SINGLE POLE-
LOCKING

SILVER

-

-

AV2211000Q04

2213771-3

SINGLE POLE-
MOMENTARY

GOLD

-

-

AV2210000R04

2213771-2

SINGLE POLE-
MOMENTARY

SILVER

-

-

AV2210000Q04

2213771-1

POLE/THROW

CONTACT

LED COLOUR

LED VOLTAGE

TE DESCRIPTIVE PN

TE PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH

-

DWN
NAGALAKSHMI K
09FEB2016

CHK
HILL RYAN
09FEB2016

APVD
HILL RYAN
09FEB2016

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

-

CUSTOMER DRAWING

SCALE
NTS

SHEET
3 OF 3

REV
A

TE Connectivity

ANTI-VANDAL SWITCH 22mm
NO LED

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-2213771

RESTRICTED TO

-

1471-9 (1/15)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9