


THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING

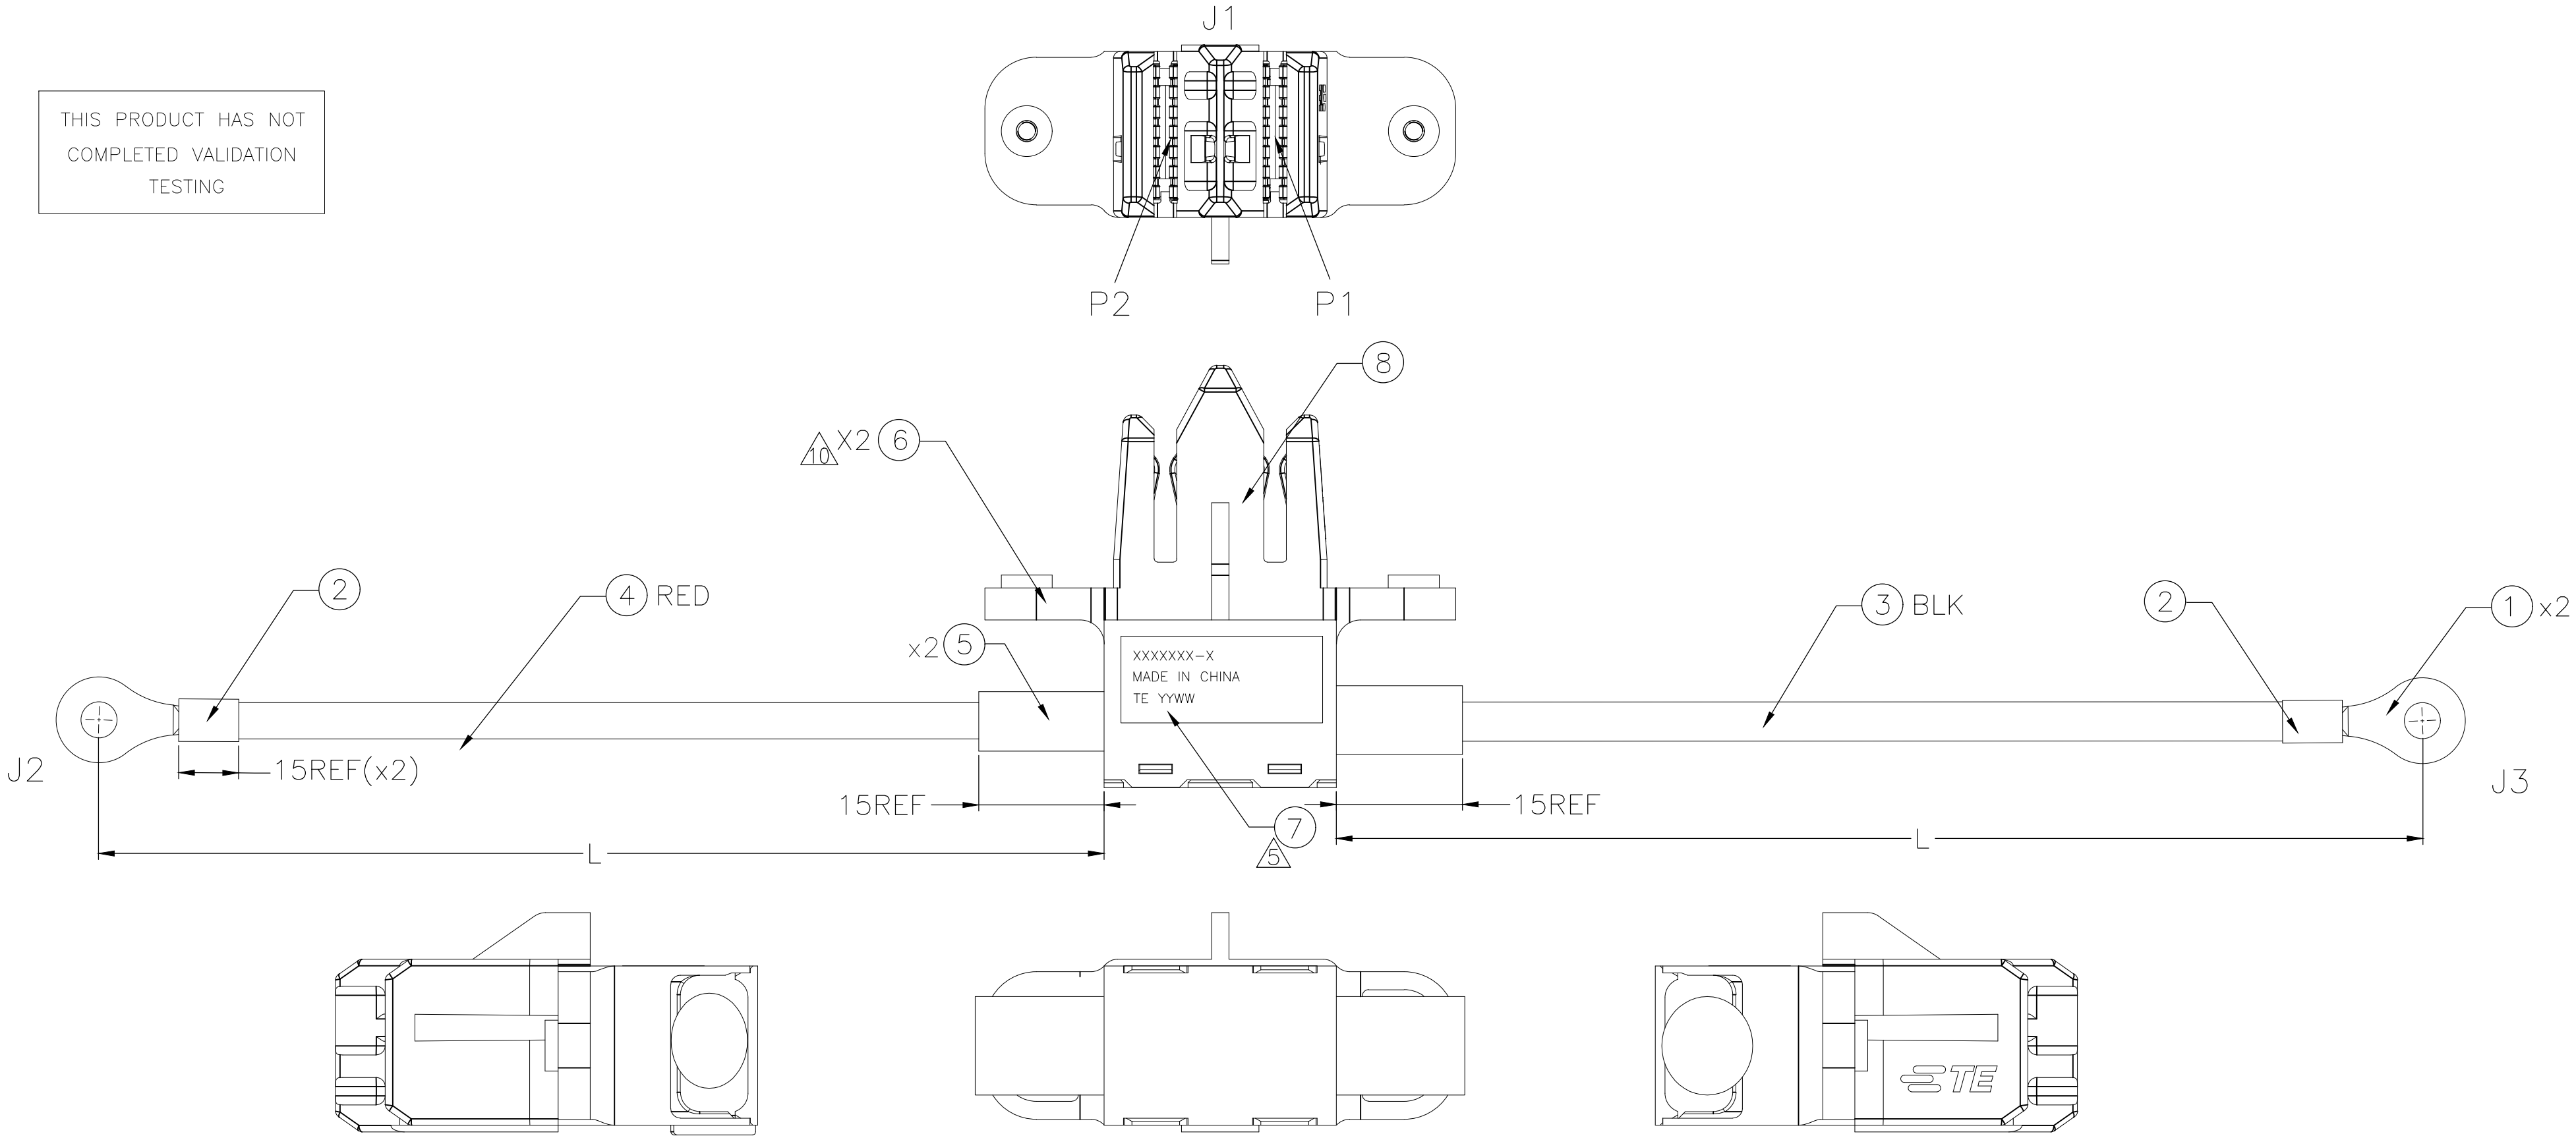

- NOTES:
- 1. 100% ELECTRICAL TEST FOR CONTINUITY, OPENS AND SHORTS.
 - 2. THE MATED BUS-BAR SHOULD HAVE SURFACE ROUGHNESS Ra 1.6um MAX. SHOULD HAVE PLATING 3um MIN. SILVER IN CONTACT AREA, AND 1.27um MIN. Ni OVERALL.
 - 3. SILVER PLATING CONTACT MAY DISCOLOR IN AIR, BUT NO PERFORMANCE ISSUE
 - 4. LOW HALOGEN REQUEST: Br<900ppm, Cl<900ppm, Br+Cl<1500ppm PER HOMOGENEOUS MATERIAL
 - 5. LABEL CONTENT AS SHOWN

XXXXXXX-X
MADE IN CHINA
TE YYWW

TE P/N
YY: YEAR;WW: WEEK

- 6. WIRE ALLOWABLE CURRENT: 75A FOR 6AWG
- 7. OPERATING TEMPERATURE: -20C~80C
- 8. FLAMMABILITY: CONNECTOR MEET UL 94V-0, WIRE MEET VW-1
- 9. THE CABLE ASSEMBLY SHOULD BE UL AND RoHS2(2011/65/EU) COMPLIANT.
- 10. M3 NUT WITHSTAND 44N min. PUSH OUT FORCE IN HOUSING.

WIRING CHART		
FROM	TO	WIRE
J1-P1	J3	BLACK
J1-P2	J2	RED

2337275-2	100±10	NA
2337275-1	250±10	NA
TE P/N	L	CUSTOMER P/N,REV.

1	PC	RA CCJ CONNECTOR TE 2326688-1	8
1	PC	LABEL	7
2	PC	M3 NUT	6
AR	MR	HEAT SHRINK TUBE, BLACK	5
AR	MR	UL WIRE 6AWG RED	4
AR	MR	UL WIRE 6AWG BLACK	3
AR	MR	HEAT SHRINK TUBE, BLACK	2
2	PC	R-TERMINAL 6AWG M8	1
-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± 0.25
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH
-

DWN
ADAM CHEN
CHK
-

APVD
DAVID ZHANG
PRODUCT SPEC
108-152035
APPLICATION SPEC
114-152042
WEIGHT
0

CUSTOMER DRAWING

24MAY2018

24MAY2018

NAME
Cable AssY, RA CCJ TO R TERMINAL

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=2337275

RESTRICTED TO
-

SCALE
N.T.S

SHEET
1 of 2

REV
3

TE Connectivity

TE



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

D



C

B

A

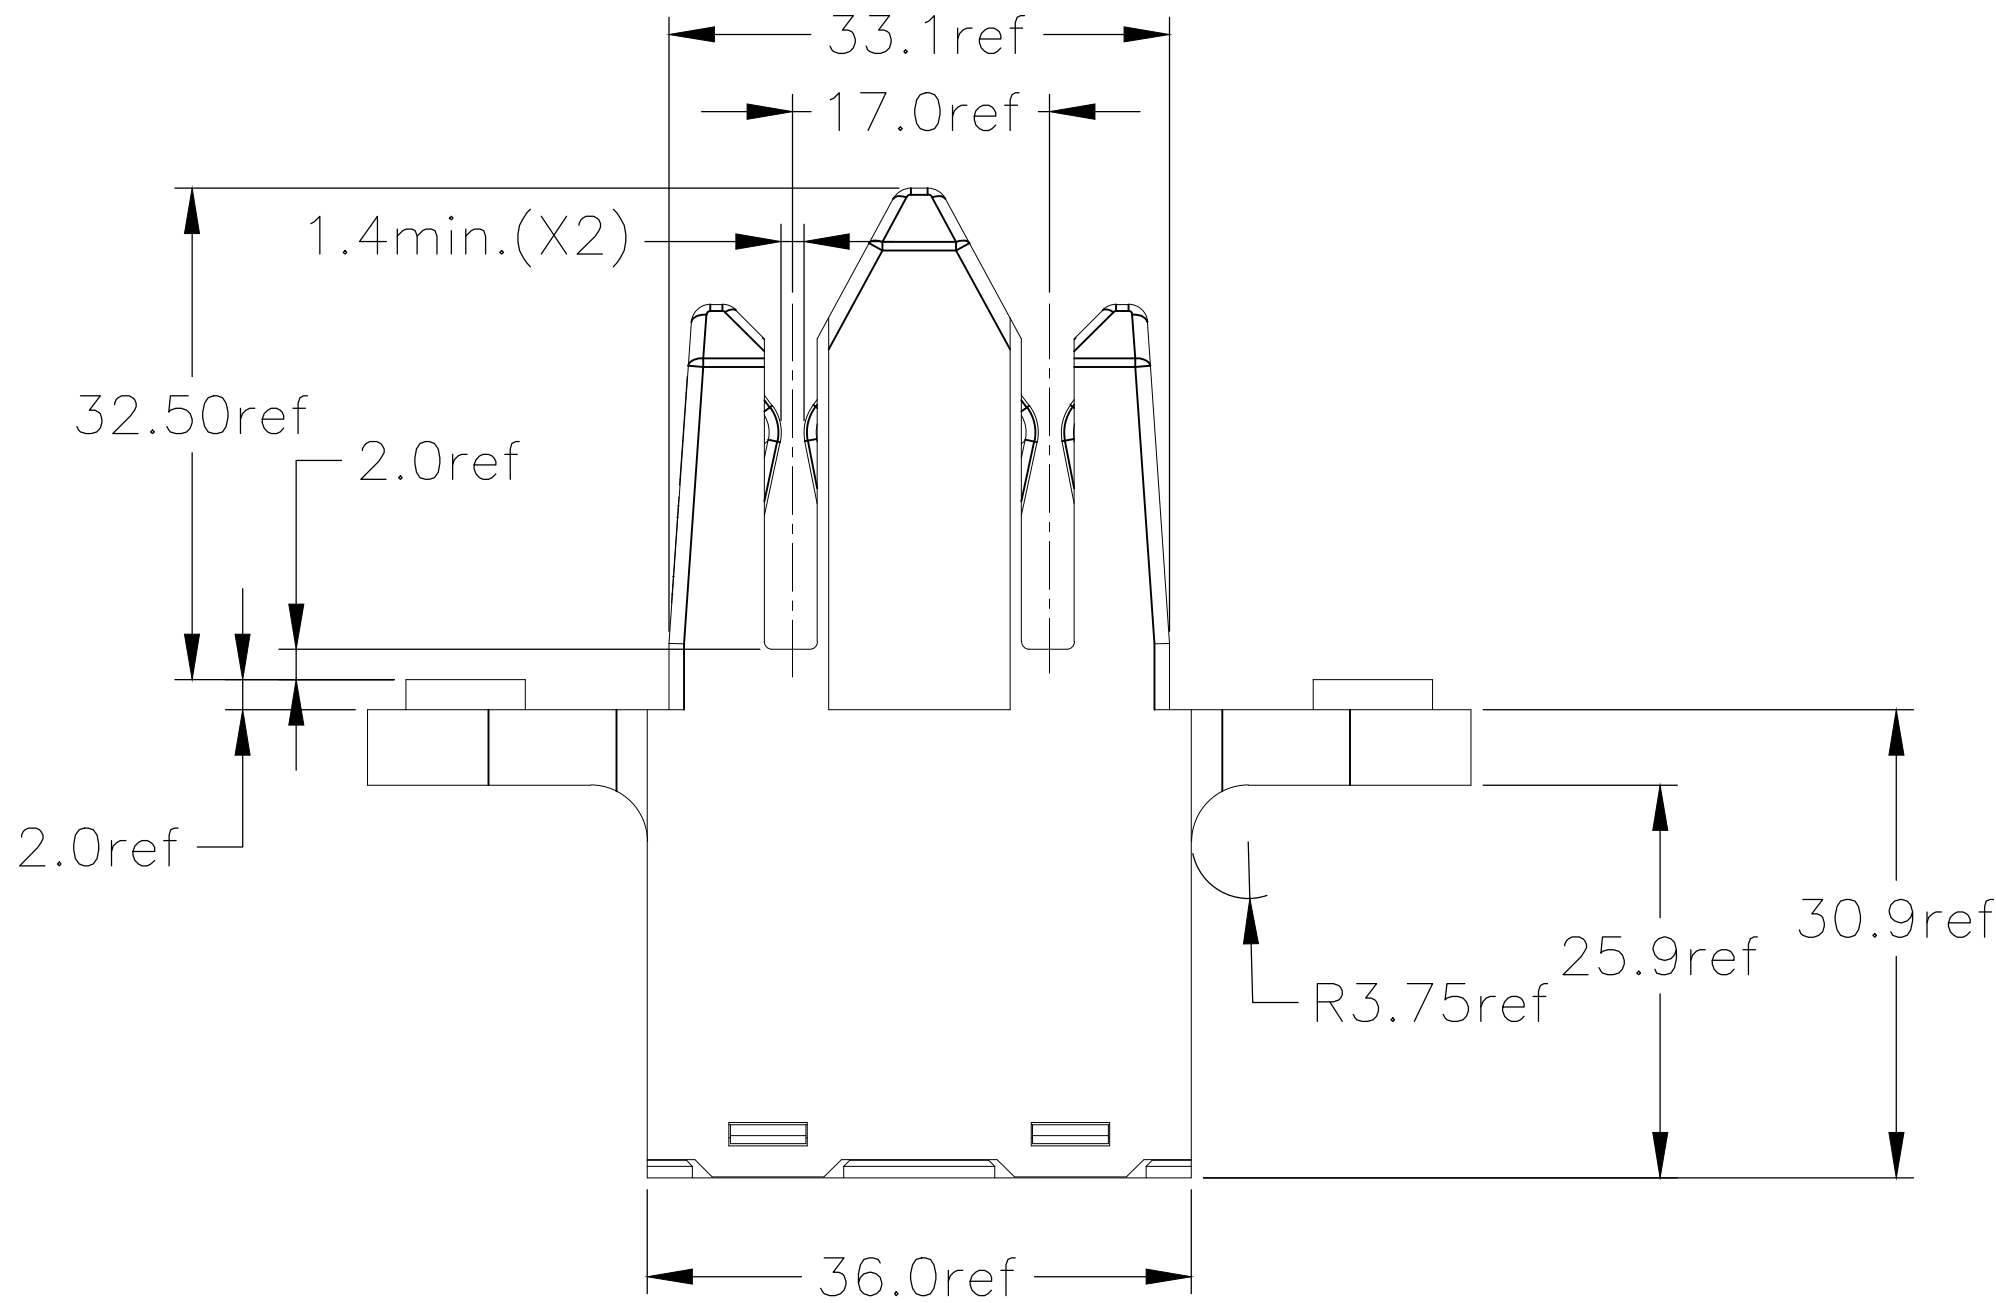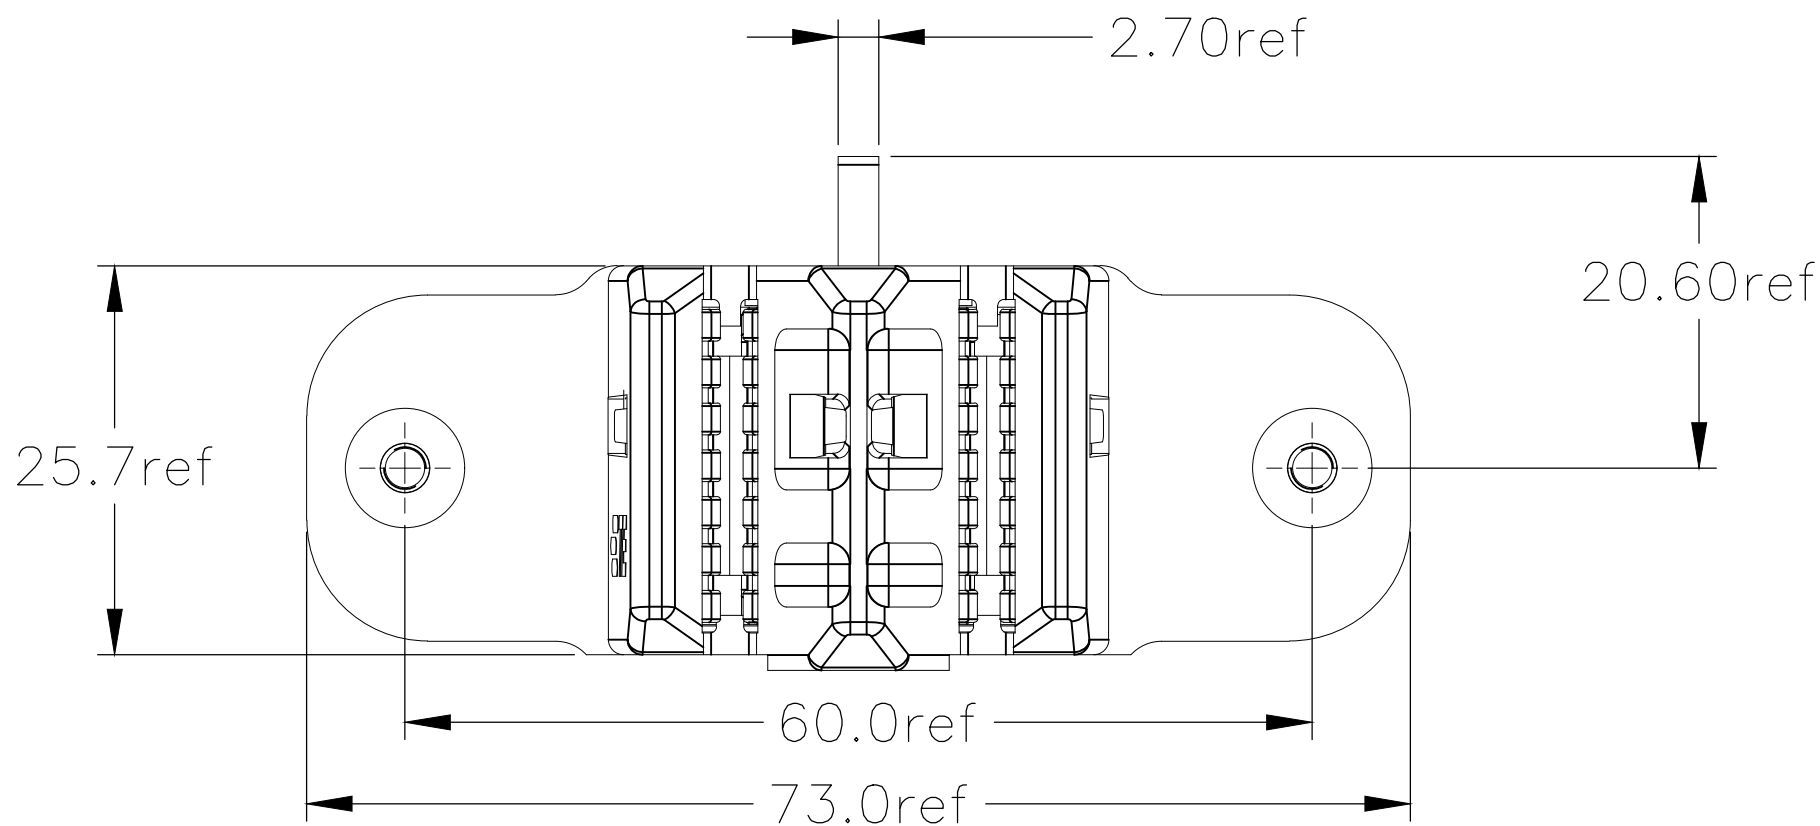

RA CCJ CONNECTOR PROFILE FOR REFERENCE

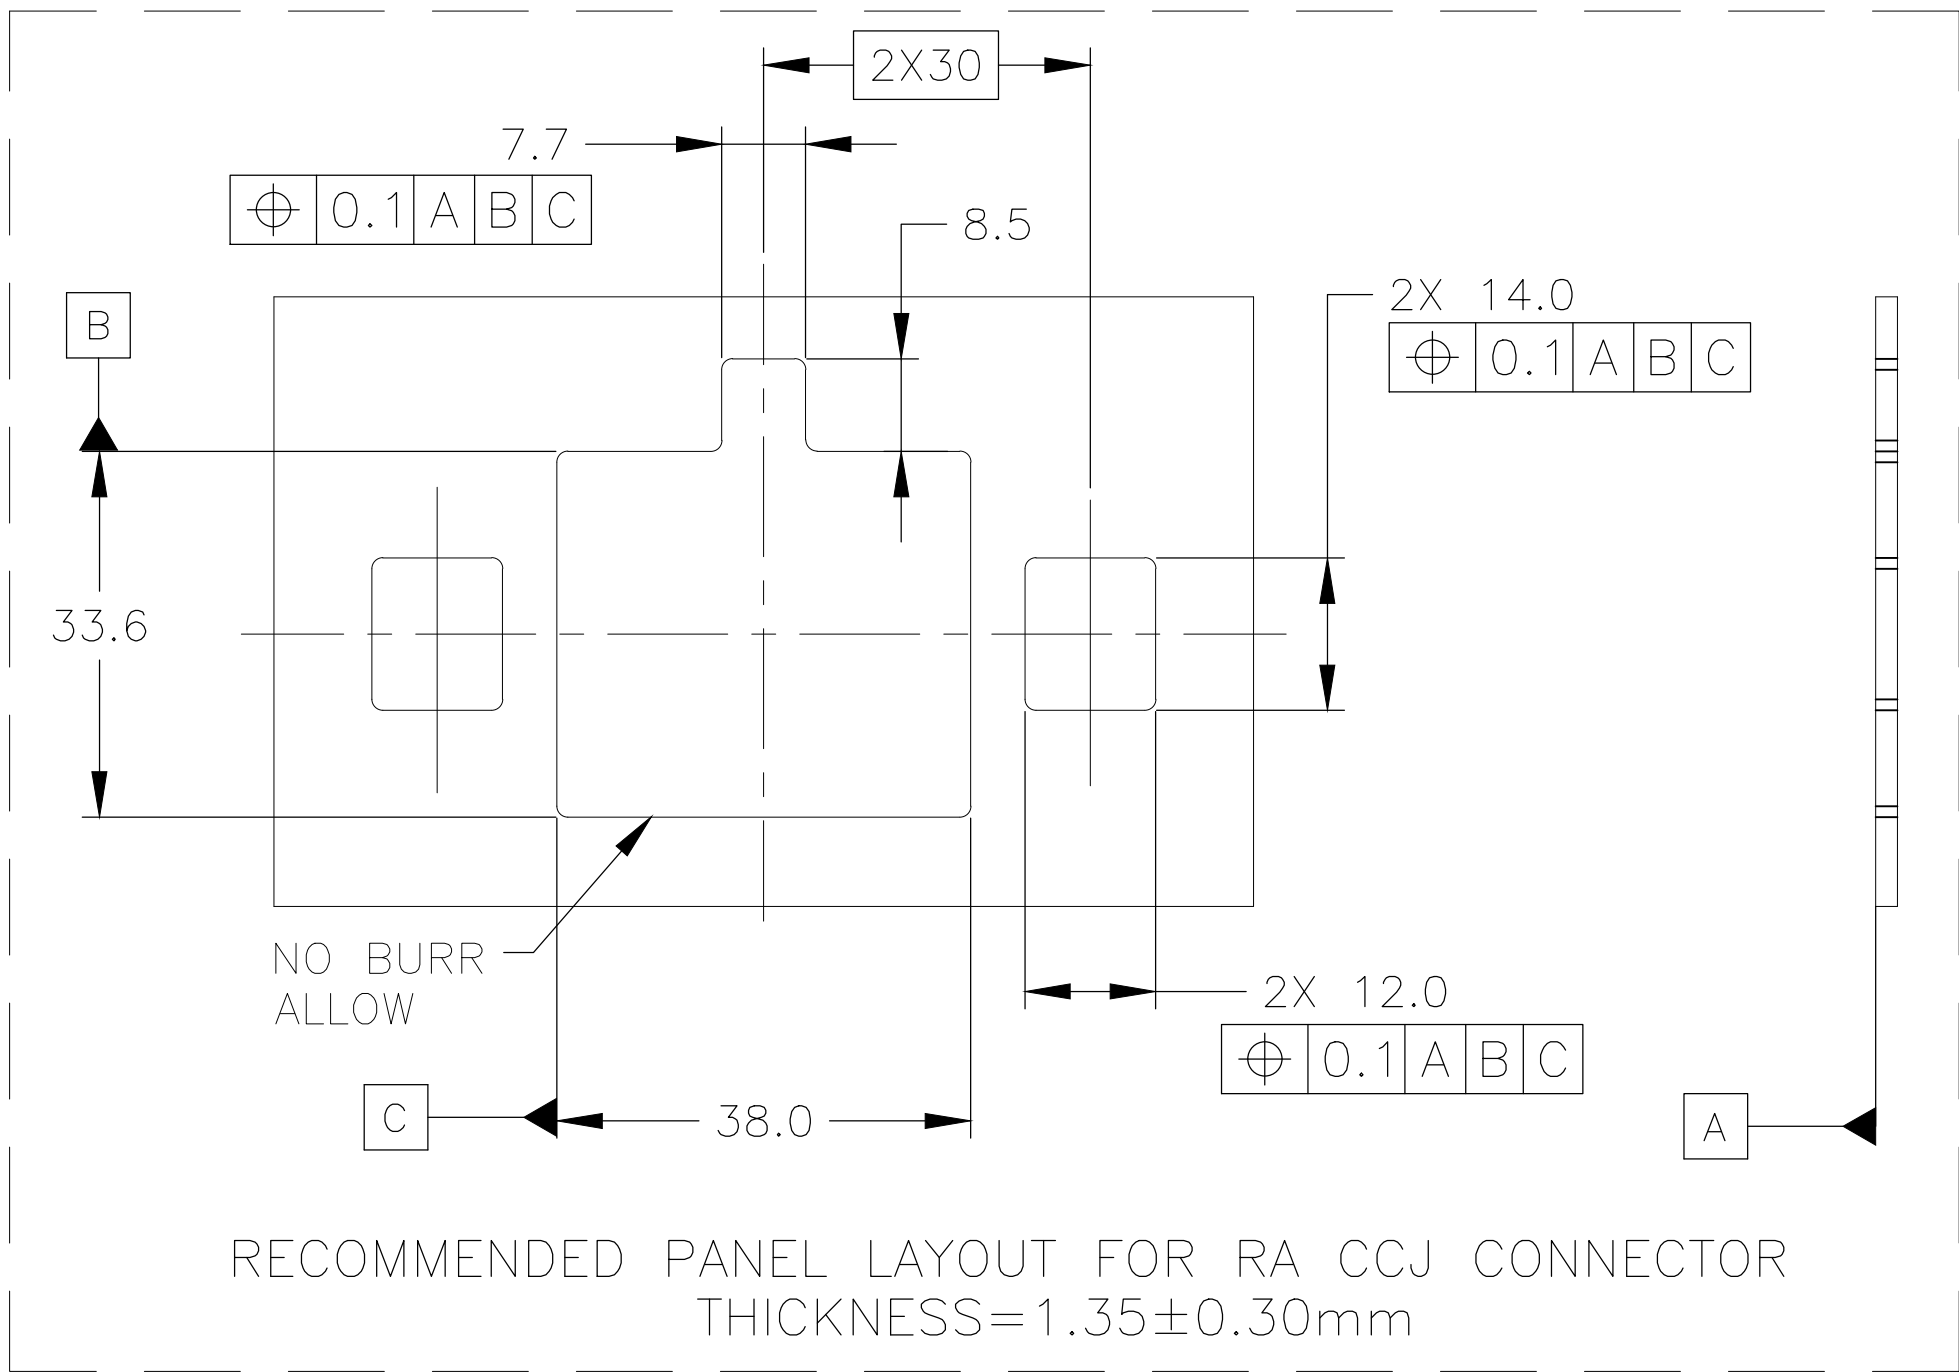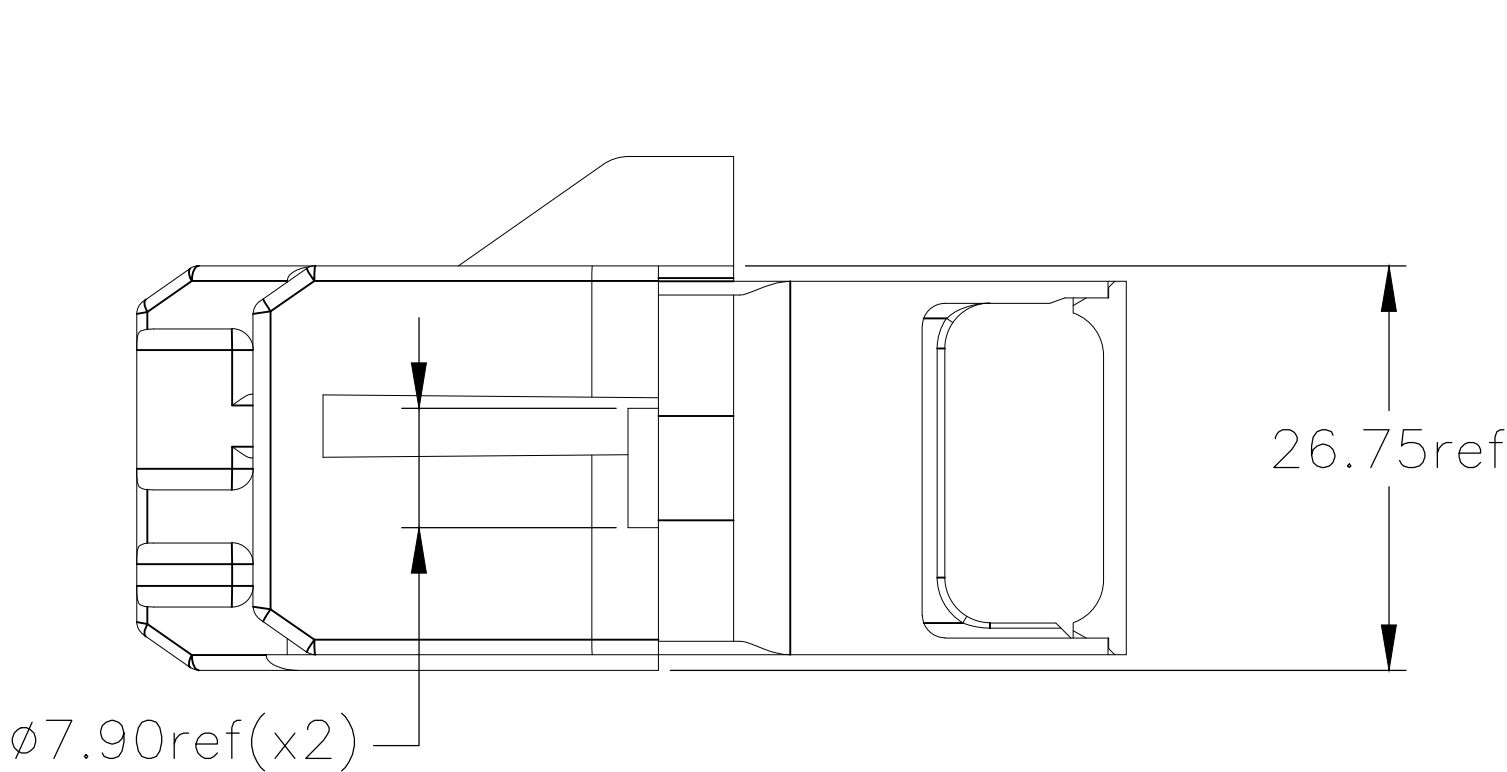

RECOMMENDED PANEL LAYOUT FOR RA CCJ CONNECTOR
THICKNESS=1.35±0.30mm

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN ADAM CHEN 24MAY2018	TE Connectivity			
DIMENSIONS: mm		CHK - APVD DAVID ZHANG 24MAY2018				
		PRODUCT SPEC 108-152035	NAME Cable AssY, Site Exit CCJ			
		APPLICATION SPEC 114-152042	SIZE A2			
MATERIAL -		WEIGHT 0	CAGE CODE 00779	DRAWING NO C=2337275	RESTRICTED TO -	
FINISH -		CUSTOMER DRAWING		SCALE N.T.S	SHEET 2 of 2	REV 3

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9