

OptiMOS™3 Power-MOSFET


Features

- Optimized technology for DC/DC converters
- Excellent gate charge x $R_{DS(on)}$ product (FOM)
- Superior thermal resistance
- Dual sided cooling
- low parasitic inductance
- Low profile (<0.7mm)
- N-channel, normal level
- 100% avalanche tested
- Pb-free plating; RoHS compliant
- Qualified according to JEDEC¹⁾ for target applications
- Compatible with DirectFET® package MN footprint and outline²⁾

Product Summary

V_{DS}	80	V
$R_{DS(on),max}$	4.4	mΩ
I_D	90	A

CanPAK™ M
MG-WDSO-2



Type	Package	Outline	Marking
BSB044N08NN3 G	MG-WDSO-2	MN	0208

Maximum ratings, at $T_j=25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Continuous drain current	I_D	$V_{GS}=10\text{ V}$, $T_C=25\text{ °C}$	90	A
		$V_{GS}=10\text{ V}$, $T_C=100\text{ °C}$	68	
		$V_{GS}=10\text{ V}$, $T_A=25\text{ °C}$, $R_{thJA}=58\text{ K/W}^{2)}$	18	
Pulsed drain current ³⁾	$I_{D,pulse}$	$T_C=25\text{ °C}$	360	mJ
Avalanche energy, single pulse	E_{AS}	$I_D=30\text{ A}$, $R_{GS}=25\text{ Ω}$	660	
Gate source voltage	V_{GS}		±20	V

¹⁾ J-STD20 and JESD22

²⁾ DirectFET® is a trademark of International Rectifier Corporation

BSB028N06NN3 G uses DirectFET® technology licensed from International Rectifier Corporation

Maximum ratings, at $T_j=25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Power dissipation	P_{tot}	$T_C=25\text{ °C}$	78	W
		$T_A=25\text{ °C}$, $R_{\text{thJA}}=58\text{ K/W}^{(2)}$	2.2	
Operating and storage temperature	T_j, T_{stg}		-40 ... 150	°C
IEC climatic category; DIN IEC 68-1			55/150/56	

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Thermal characteristics

Thermal resistance, junction - case	R_{thJC}	bottom	-	1.0	-	K/W
		top	-	-	1.6	
Device on PCB	R_{thJA}	6 cm ² cooling area ⁽²⁾	-	-	58	

Electrical characteristics, at $T_j=25\text{ °C}$, unless otherwise specified

Static characteristics

Drain-source breakdown voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}}=0\text{ V}, I_{\text{D}}=1\text{ mA}$	80	-	-	V
Gate threshold voltage	$V_{\text{GS(th)}}$	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=97\text{ }\mu\text{A}$	2	2.8	3.5	
Zero gate voltage drain current	I_{DSS}	$V_{\text{DS}}=80\text{ V}, V_{\text{GS}}=0\text{ V}$, $T_j=25\text{ °C}$	-	0.1	10	μA
		$V_{\text{DS}}=80\text{ V}, V_{\text{GS}}=0\text{ V}$, $T_j=125\text{ °C}$	-	10	100	
Gate-source leakage current	I_{GSS}	$V_{\text{GS}}=20\text{ V}, V_{\text{DS}}=0\text{ V}$	-	10	100	nA
Drain-source on-state resistance	$R_{\text{DS(on)}}$	$V_{\text{GS}}=10\text{ V}, I_{\text{D}}=30\text{ A}$	-	3.7	4.4	
Gate resistance	R_{G}		-	0.5	-	Ω
Transconductance	g_{fs}	$ V_{\text{DS}} >2 I_{\text{D}} R_{\text{DS(on)max}}$, $I_{\text{D}}=30\text{ A}$	36	72	-	S

⁽²⁾ Device on 40 mm x 40 mm x 1.5 mm epoxy PCB FR4 with 6 cm² (one layer, 70 μm thick) copper area for drain connection. PCB is vertical in still air.

⁽³⁾ See figure 3 for more detailed information

Parameter	Symbol	Conditions	Values			Unit
			min.	typ.	max.	

Dynamic characteristics

Input capacitance	C_{iss}	$V_{GS}=0\text{ V}, V_{DS}=40\text{ V},$ $f=1\text{ MHz}$	-	4300	5700	pF
Output capacitance	C_{oss}		-	1100	1450	
Reverse transfer capacitance	C_{rss}		-	38	-	
Turn-on delay time	$t_{d(on)}$	$V_{DD}=40\text{ V}, V_{GS}=10\text{ V},$ $I_D=30\text{ A}, R_G=1.6\ \Omega$	-	14	-	ns
Rise time	t_r		-	9	-	
Turn-off delay time	$t_{d(off)}$		-	26	-	
Fall time	t_f		-	7	-	

Gate Charge Characteristics⁵⁾

Gate to source charge	Q_{gs}	$V_{DD}=40\text{ V}, I_D=30\text{ A},$ $V_{GS}=0\text{ to }10\text{ V}$	-	17	-	nC
Gate to drain charge	Q_{gd}		-	11	-	
Switching charge	Q_{sw}		-	17	-	
Gate charge total	Q_g		-	55	73	
Gate plateau voltage	$V_{plateau}$		-	4.6	-	V
Output charge	Q_{oss}	$V_{DD}=30\text{ V}, V_{GS}=0\text{ V}$	-	75	99	

Reverse Diode


Diode continuous forward current	I_S	$T_C=25\text{ °C}$	-	-	30	A
Diode pulse current	$I_{S,pulse}$		-	-	120	
Diode forward voltage	V_{SD}	$V_{GS}=0\text{ V}, I_F=30\text{ A},$ $T_J=25\text{ °C}$	-	0.9	1.2	V
Reverse recovery time	t_{rr}	$V_R=40\text{ V}, I_F=I_S,$ $di_F/dt=400\text{ A}/\mu\text{s}$	-	55	-	ns
Reverse recovery charge	Q_{rr}		-	110	-	nC

⁴⁾ See figure 13 for more detailed information

⁵⁾ See figure 16 for gate charge parameter definition


1 Power dissipation

$$P_{\text{tot}} = f(T_C)$$

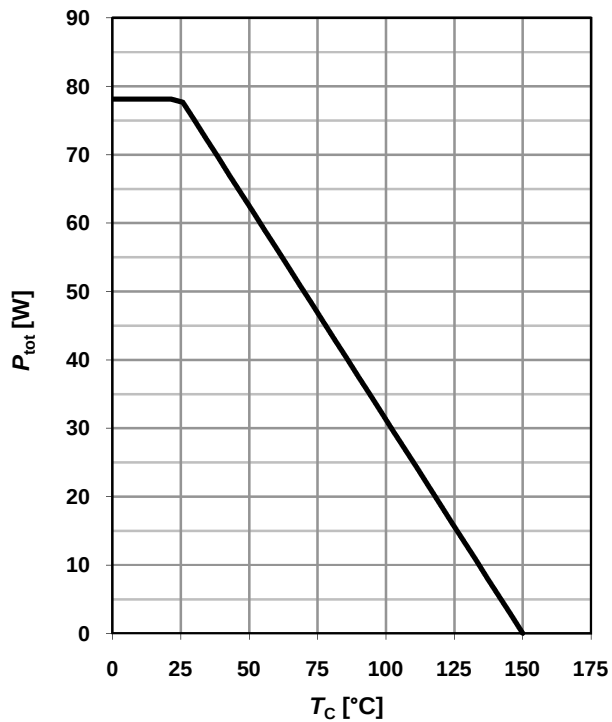

2 Drain current


$$I_D = f(T_C); V_{GS} \geq 10 \text{ V}$$

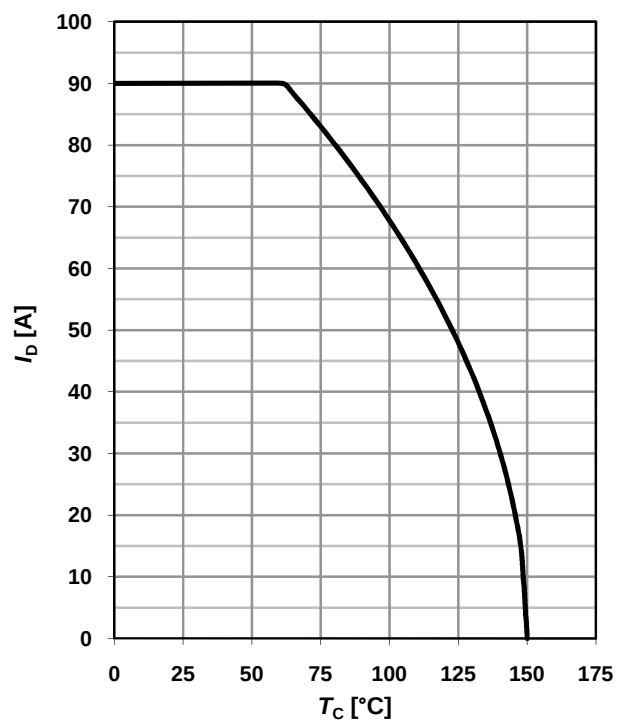

3 Safe operating area

$$I_D = f(V_{DS}); T_C = 25^\circ\text{C}; D = 0$$


parameter: t_p

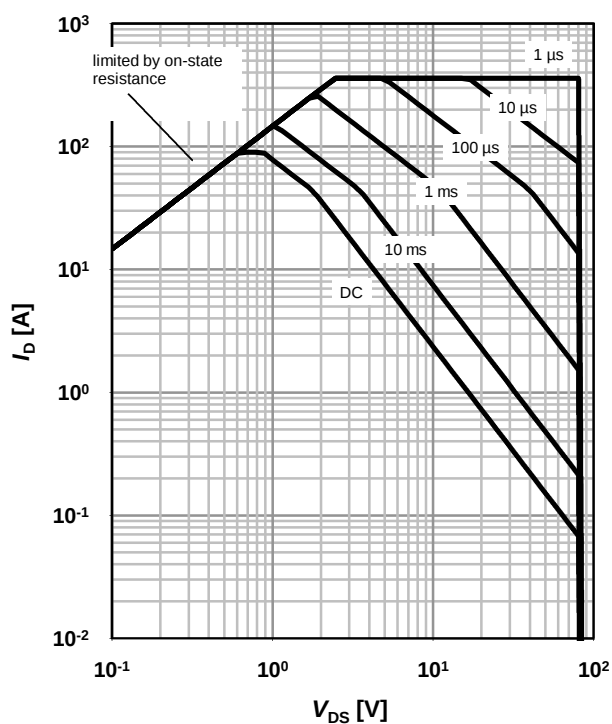

4 Max. transient thermal impedance


$$Z_{\text{thJC}} = f(t_p)$$

parameter: $D = t_p/T$

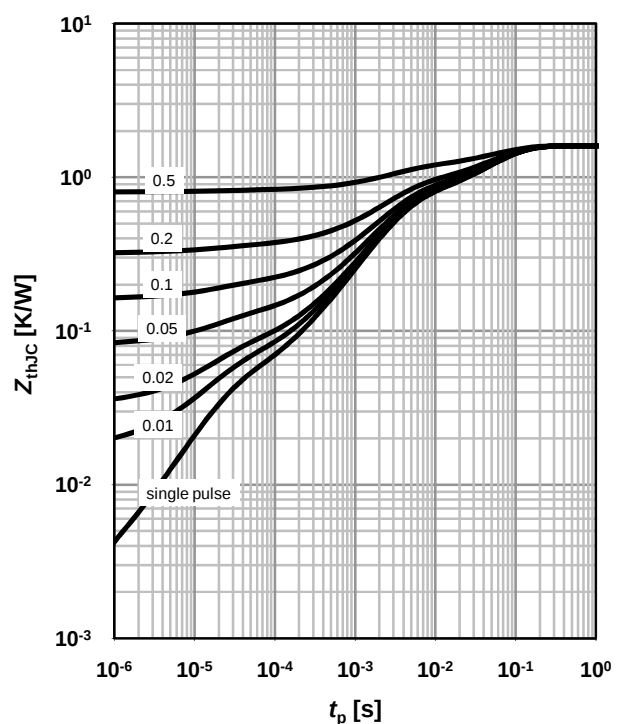


5 Typ. output characteristics

 $I_D = f(V_{DS}); T_j = 25^\circ\text{C}$

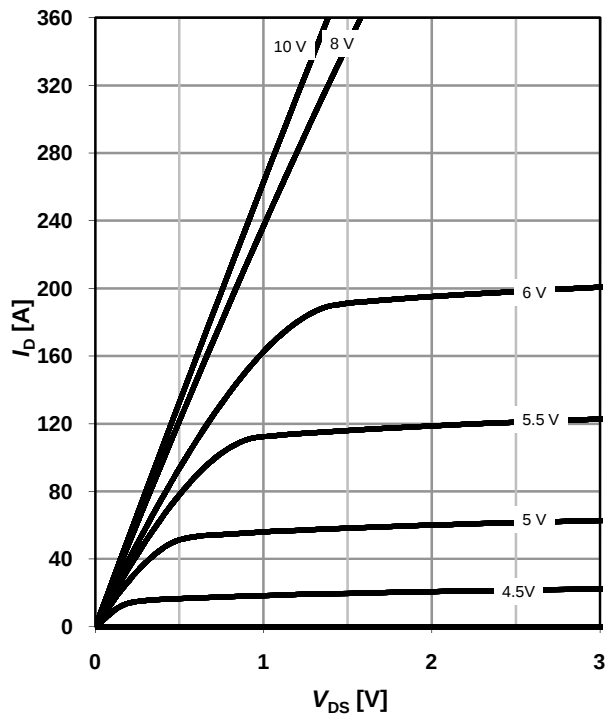parameter: V_{GS}


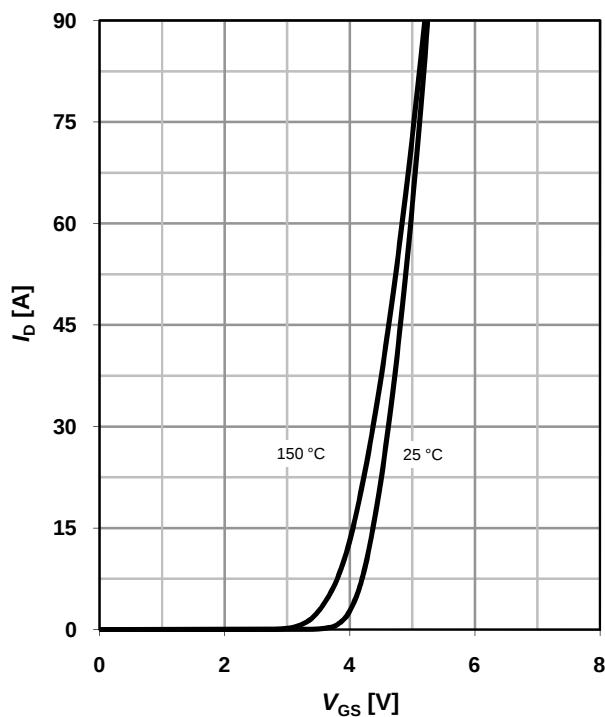
6 Typ. drain-source on resistance

 $R_{DS(on)} = f(I_D); T_j = 25^\circ\text{C}$

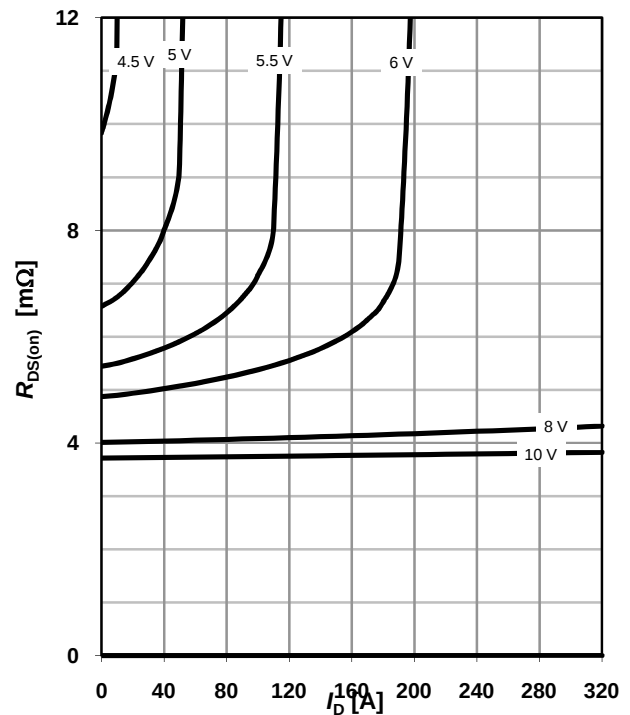
parameter: V_{GS}


7 Typ. transfer characteristics

 $I_D = f(V_{GS}); |V_{DS}| > 2|I_D|R_{DS(on)max}$


parameter: T_j


8 Typ. forward transconductance

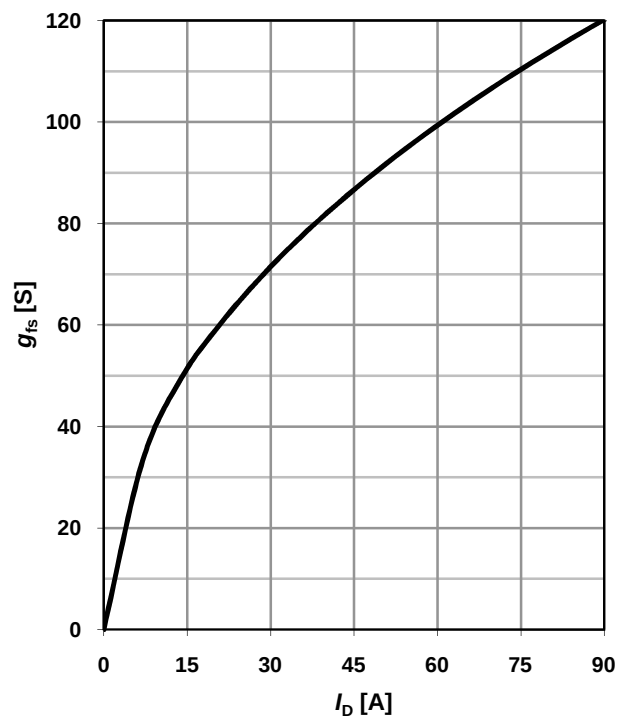 $g_{fs} = f(I_D); T_j = 25^\circ\text{C}$


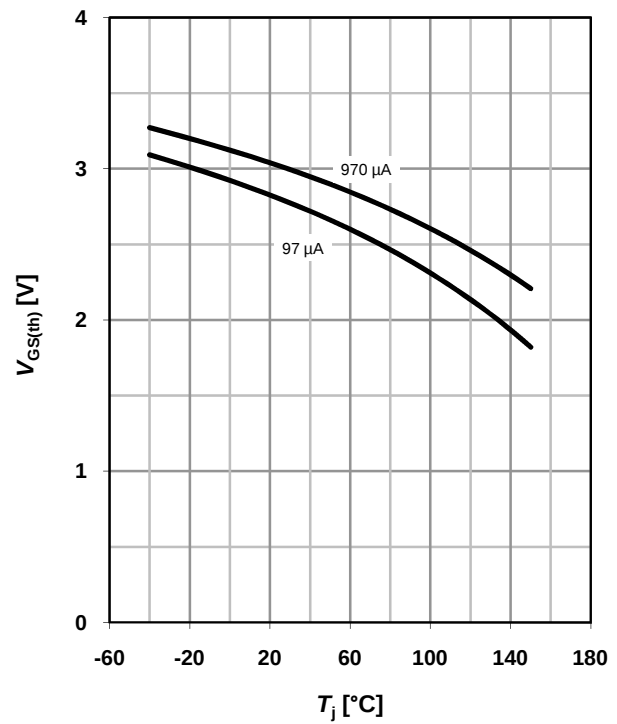
9 Drain-source on-state resistance

$$R_{DS(on)} = f(T_j); I_D = 30 \text{ A}; V_{GS} = 10 \text{ V}$$

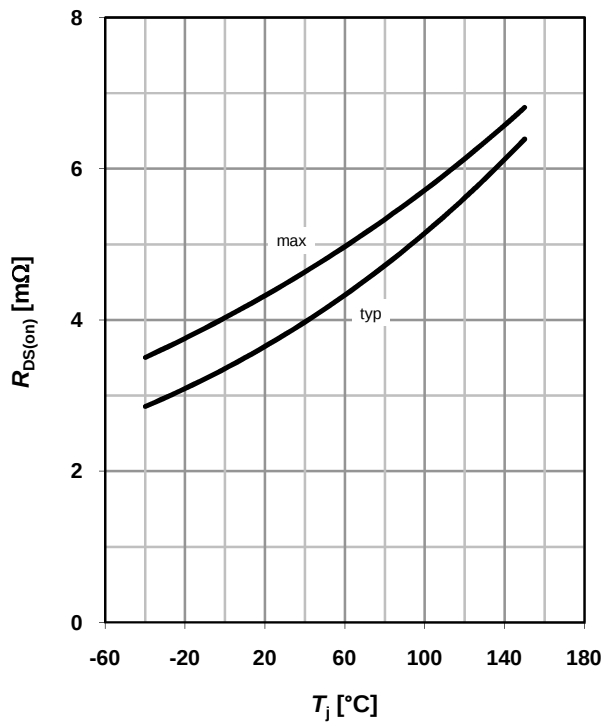


10 Typ. gate threshold voltage

$$V_{GS(th)} = f(T_j); V_{GS} = V_{DS}$$



11 Typ. capacitances


$$C = f(V_{DS}); V_{GS} = 0 \text{ V}; f = 1 \text{ MHz}$$

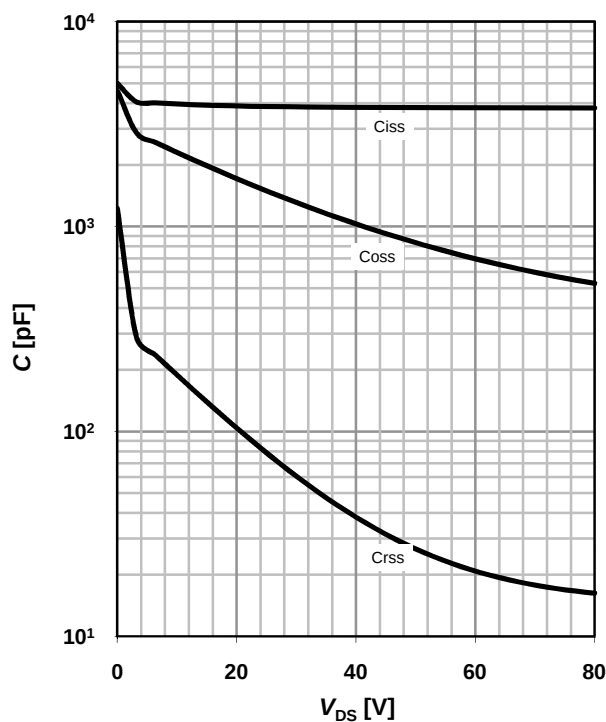

12 Forward characteristics of reverse diode

$$I_F = f(V_{SD})$$


parameter: T_j

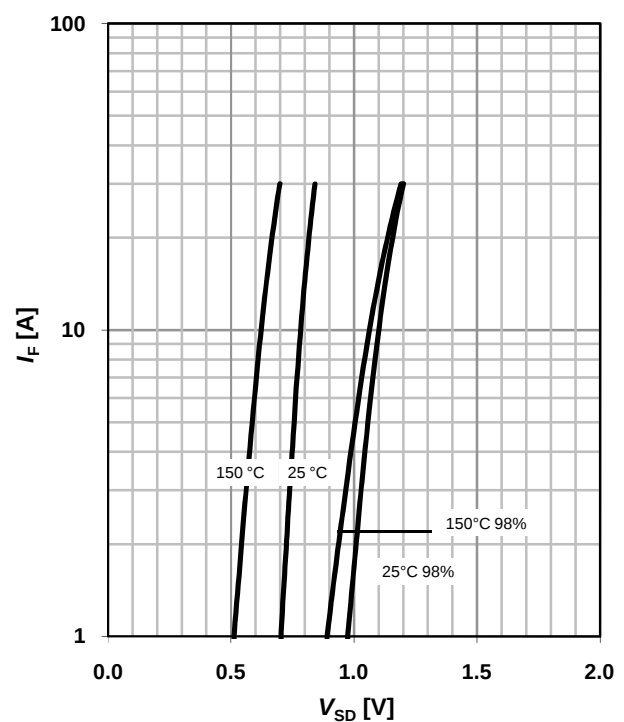

13 Avalanche characteristics

$$I_{AS}=f(t_{AV}); R_{GS}=25\ \Omega$$


parameter: $T_{j(\text{start})}$

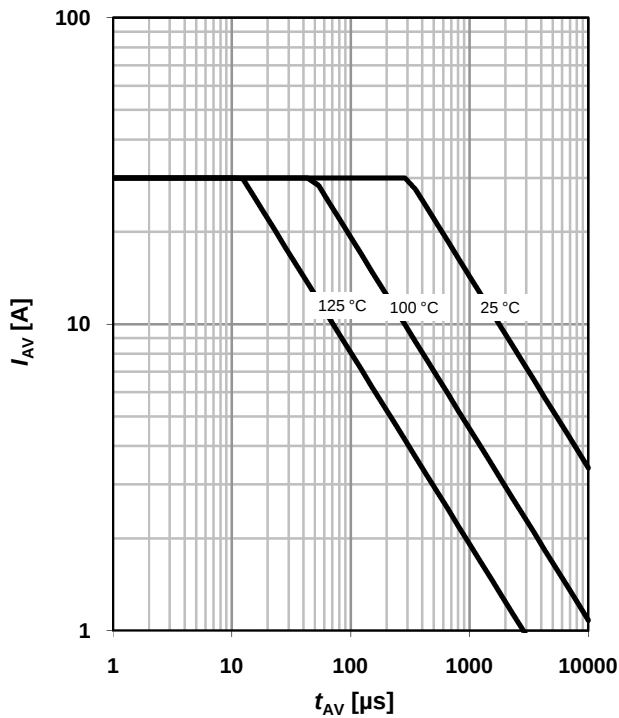

14 Typ. gate charge


$$V_{GS}=f(Q_{\text{gate}}); I_D=30\ \text{A pulsed}$$

parameter: V_{DD}

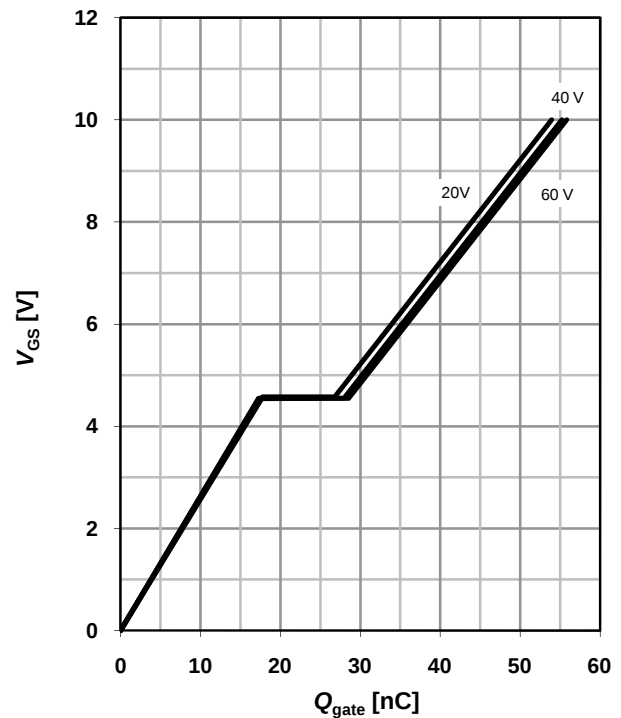


15 Drain-source breakdown voltage

$$V_{BR(DSS)}=f(T_j); I_D=1\ \text{mA}$$

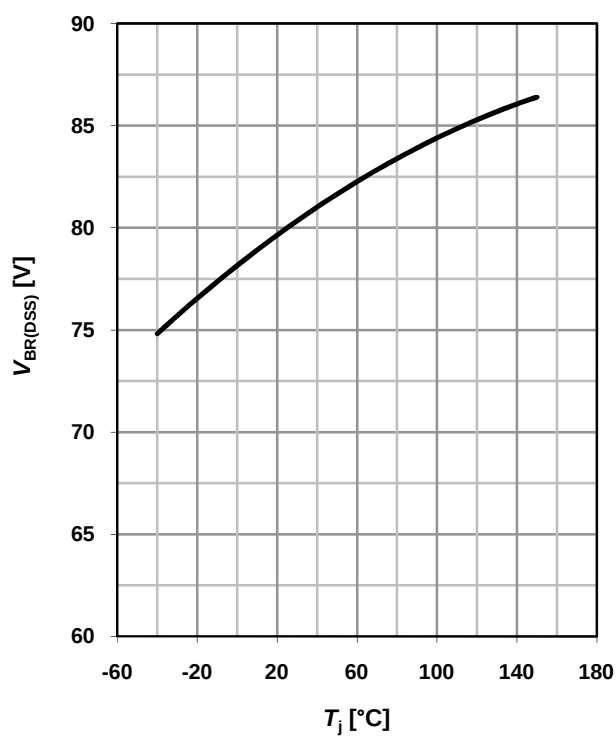


16 Gate charge waveforms

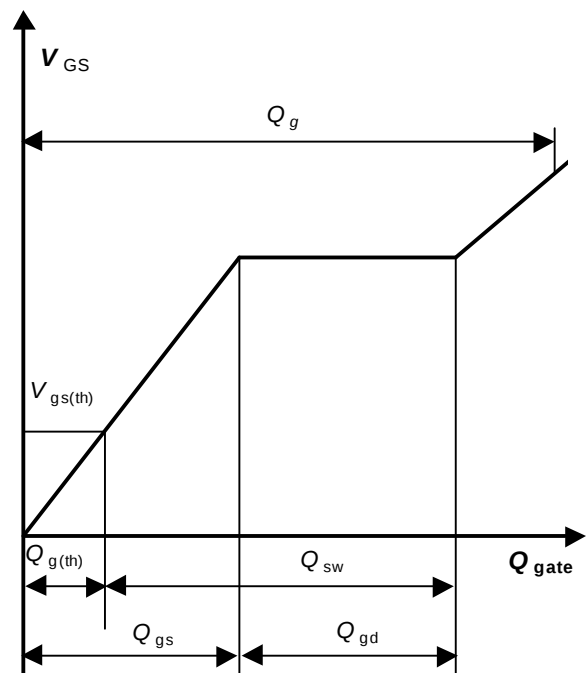

Package Outline

CanPAK™ M
MG-WDSO-2

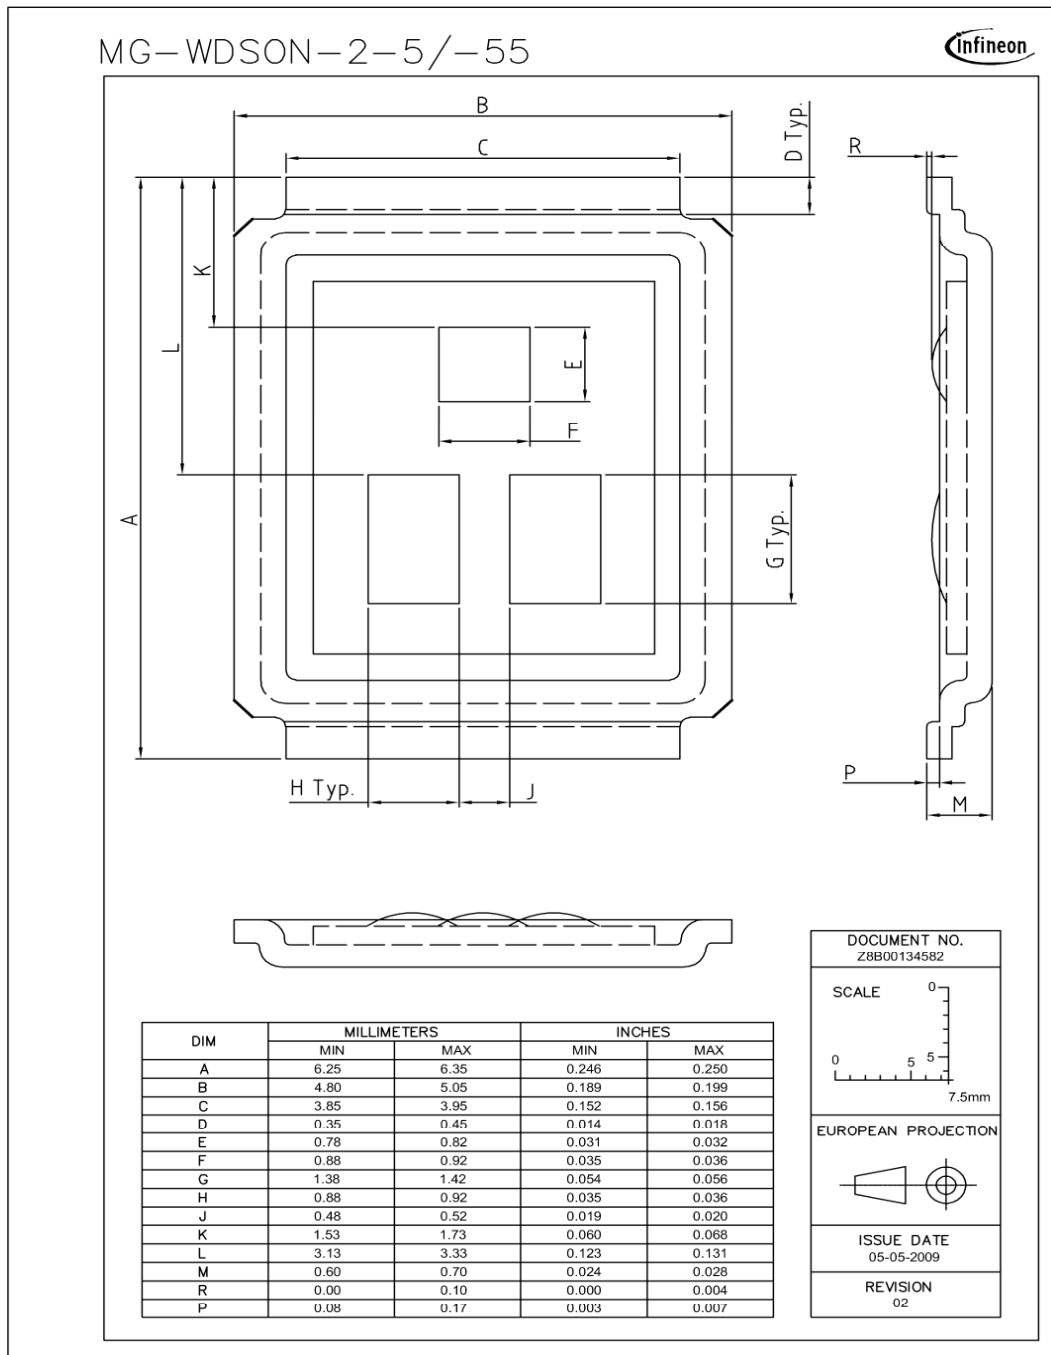


Technical drawing of a rectangular plate with the following dimensions and features:

- Overall width: $12.00^{+0.30}_{+0.10}$
- Overall height: 1.20 ± 0.10
- Top edge features:
 - Left corner: 5.50 ± 0.05
 - Top edge center: 4.00
 - Right corner: 0.30 ± 0.05
- Internal features:
 - Top edge center: 8.00 ± 0.10
 - Top edge center: 2.00 ± 0.05
 - Top edge center: $\phi 1.50 \pm 0.10$
 - Top edge center: 1.75
 - Top edge center: 0.95 ± 0.10
- Bottom edge features:
 - Left corner: 5.20 ± 0.05
 - Bottom edge center: 6.60 ± 0.10
 - Bottom edge center: 5.10 ± 0.10
- Other features:
 - Top edge center: $\phi 1.50 \text{ Min}$
 - Top edge center: X
 - Top edge center: $X-X$

2011-07-18

CanPAK™ M MG-WDSO-2

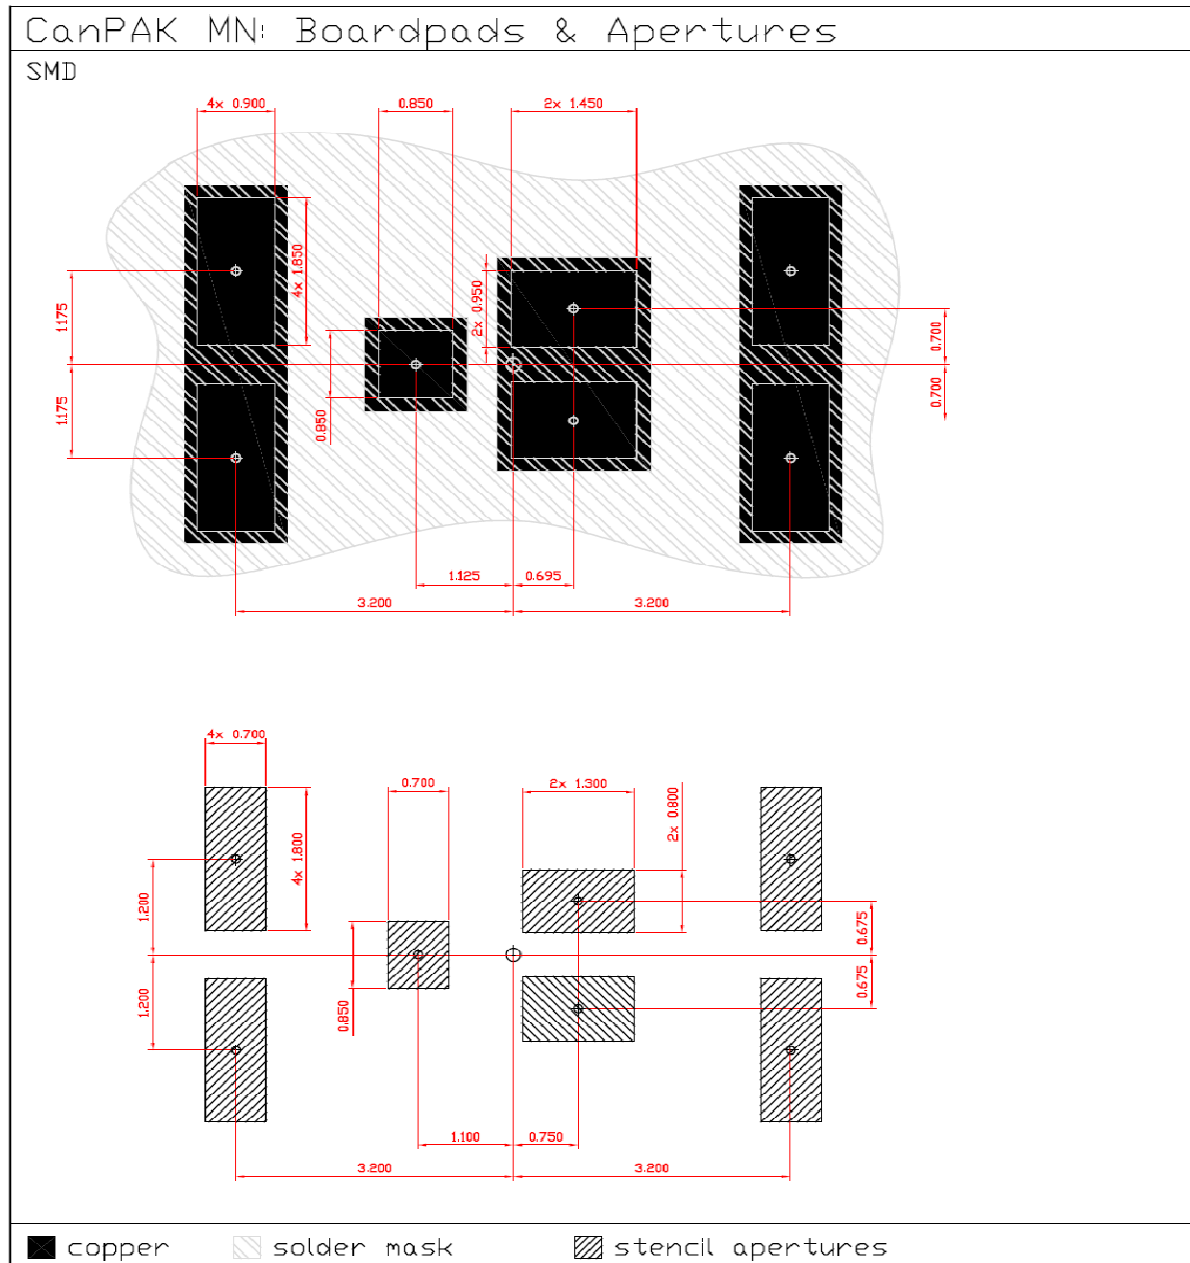

Dimensions in mm

Raccomended stencil thickness 150 µm

Published by

Infineon Technologies AG
81726 Munich, Germany
© 2011 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9