DBS-1200 MANUAL BANDING TOOL



SEE PAGE 2 FOR IMPORTANT INFORMATION CONCERNING LIMITED WARRANTY, AND LIMITATION OF LIABILITY.

APPLICATION

EMI/RFI bands meeting AS85049/128 Rev. A and other OEM standards. The Daniels DBS—1200 Series Manual Banding Tools comply with all performance requirements set forth in AS85049/128 Rev. A.

INTRODUCTION

The Daniels DBS-1200 (M81306/2-01B) Manual Banding Tool is primarily designed for termination of EMI/RFI shielding materials.

1.0 OPERATION

1.1 Insert the mechanical band into the DBS-1200 Banding Tool at least 1.75 inches, the band loop shall be oriented on the upper side of the tool's nose (see Figure 1). Actuate the movable handle of the tool one complete stroke to insure that the band has been captured by the gripping mechanism. The band must be double-looped as shown in Figure 6.




FIGURE 1

- 1.2 Position the connector and the shield assembly through the band allowing the connector to be on the left side of the tool.
- 1.3 Orientate the shield terminations under the band while actuating the movable handle of the tool. Continue tool actuation until the band is snug and tool resistance is felt, then release the movable handle and actuate the handle one full stroke thus locking the movable handle (locking occurs at the predetermined poundage). DO NOT ATTEMPT TO PULL THE HANDLE OF THE TOOL OPEN. WHEN THE BAND IS CUT, THE MOVABLE HANDLE WILL OPEN AUTOMATICALLY.

DANIELS MANUFACTURING CORP., 526 THORPE ROAD, ORLANDO, FL 32824, USA, PHONE 407/855-6161, FAX 407/855-6884 COPYRIGHT © 2015 DANIELS MANUFACTURING CORP., USA. WWW.DMCTOOLS.COM E-MAIL: DMC@DMCTOOLS.COM ALL RIGHTS RESERVED



1.4 At any point in the operation prior to the locking of the movable handle, the band may be loosened or removed by disengaging the retention pawl as shown in Figure 2.

When actuating the retention pawl, apply a force on the band away from the tool to remove or loosen the band.

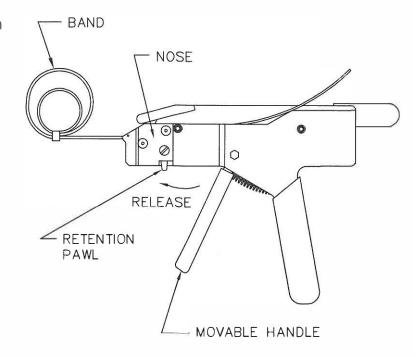


FIGURE 2

LIMITATION OF LIABILITY

DANIELS MANUFACTURING CORPORATION IS NOT LIABLE FOR CONSEQUENTIAL OR SPECIAL DAMAGES OF ANY NATURE OR KIND RESULTING FROM THE USE, OR MISUSE, OF ANY OF ITS PRODUCTS. OWNERS AND USERS OF DMC PRODUCTS ASSUME FULL RESPONSIBILITY FOR INSTRUCTING THEIR EMPLOYEES IN THE PROPER AND SAFE USE OF SUCH PRODUCTS.

LIMITED WARRANTY


DMC (Daniels Manufacturing Corporation) warrants each new product sold by it to be free from defects in material and workmanship under normal use and service. DMC's obligation under this warranty is limited to the free correction or, at DMC's option, the refund of the purchase price of any such product which proves defective in normal service within ninety (90) days after delivery to the first user, provided that the product is returned to DMC with all transportation charges prepaid and which shall appear to DMC's satisfaction, after DMC's inspection, to have been defective in material or workmanship, it being understood that DMC products are not consumer products. This warranty shall not cover any damage to any product which, in the opinion of DMC, was caused by normal wear, misuse, improper operation, tampering, neglect or accident. This warranty is in lieu of all other warranties express or implied. No warranty, express or implied, is made or authorized to be made or assumed with respect to products of Daniels Manufacturing Corporation other than those herein set forth.



1.5 To complete the termination, the band must be bent 90° by lifting the cutter lever upwards (Figure 3), and then cut by depressing the cutter lever downwards (Figure 4). WHEN THE CUTTING OPERATION HAS STARTED IT MUST BE COMPLETED PRIOR TO ANY FURTHER MOVEMENT OF THE BAND IN THE TOOL.


NOTE: PREMATURE RELEASE OF THE MOVABLE HANDLE DURING THE BENDING CYCLE IS ACCEPTABLE.

WARNING: WORN CUTTER BLADE REQUIRES
ADDITIONAL PRESSURE TO OPERATE
AND MAY DAMAGE THE TOOL, OR
MAY RESULT IN ACCIDENT OR INJURY.
REPLACE CUTTER BLADE PERIODICALLY.



1.7 The cut off tab (Figure 5) must be rolled over 180° in a manner which will prevent slippage (Figure 6).

NOTE: DMC RECOMMENDS THE USE OF DBS-RO5 ROLLOVER TOOL.
SLIPPAGE MAY OCCUR IF ROLLOVER EXCEEDS 180° (Figure 7).








FIGURE 5



FIGURE 6




FIGURE 4

FIGURE 7



2.0 BAND TENSION VERIFICATION


- 2.1 Checking Band Tension on the tool
 - 2.1.1 Place the verification inspection fixture DBS-CG3 (M81306/2-02F) and the manual banding tool so that they may be oriented as shown in Figure 8.
 - 2.1.2 Insert a flat band through the band insertion slot of verification inspection fixture until it extends completely through the fixture and the band buckle is resting against the backstop.
 - 2.1.3 Insert the band into the nose of the banding tool as described in paragraph 1.1.
 - 2.1.4 Repeatedly actuate the movable handle. As you approach the fixture use short strokes until the band is snug. Then use one full stroke and the movable handle will lock.
 - 2.1.5 Insert the go member of the Go/No-Go (G752) gage into the gage verification slot of the verification inspection fixture. If the Go member does not insert freely, the tool is exerting excessive force. Likewise, if the No-Go member freely enters the gage verification slot, the tool is below the minimum force limit. If tension adjustment is required, see section 2.2.
 - 2.1.6 To separate, actuate the cutter lever.
 - 2.1.7 Remove spent band pieces from both the verification inspection fixture and the banding tool.

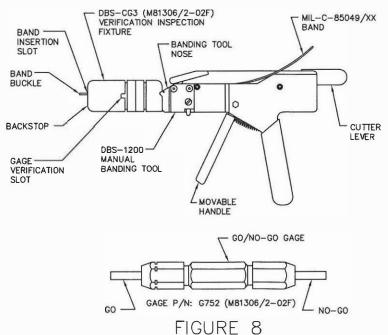



2.2 ADJUSTING TOOL TENSION

2.2.1 Remove adjustment cover screws and adjustment cover with a 3/32" hex drive wrench (Figure 9).

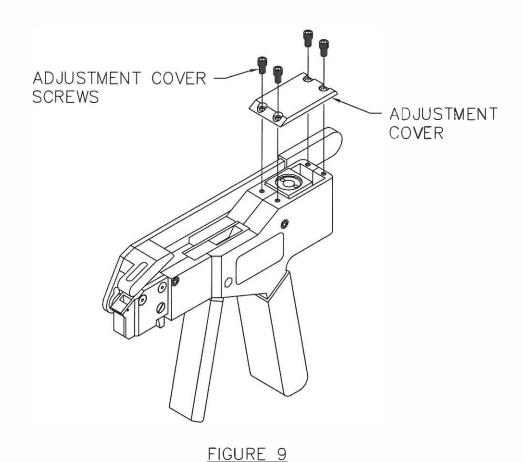

PAGE 5



- 2.2.2 Adjust tool tension with adjustment wrench (DBS-1100-32). To increase tension, turn adjustment screw clockwise. To decrease tension, turn adjustment screw counterclockwise (see Figure 10). Tension should be set at 72±10 lb.
- 2.2.3 Check adjusted tension as described in section 2.1.
- 2.2.4 If adjustment did not bring the tool within proper adjustment, repeat steps 2 and 3 until adjusted correctly.
- 2.2.5 Replace adjustment cover and adjustment cover screws.


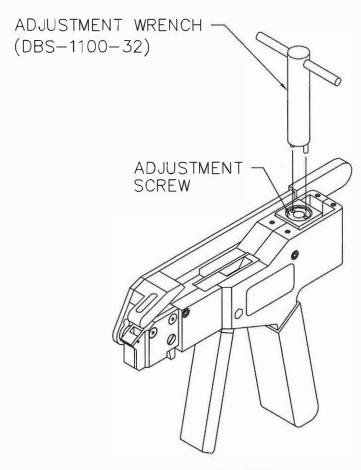


FIGURE 10




3.0 BLADE CHANGE PROCEDURE

- 3.1 Loosen lock screw, located as shown below
- 3.2 Raise Cutter lever to complete upright position
- 3.3 At this point blade will be free to fall from tool nose. If blade does not fall, use a probe to free the blade.
- 3.4 With blade removed, inspect blade cavity for any debris. Remove debris. Lubricate blade with a light coat of machine oil.
- 3.5 To reinstall blade, raise cutter lever again to complete upright position, insert blade as shown below, lower cutter lever and tighten lock screw.

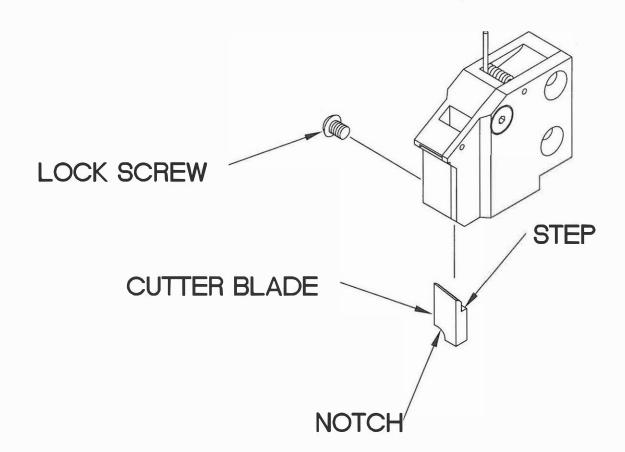



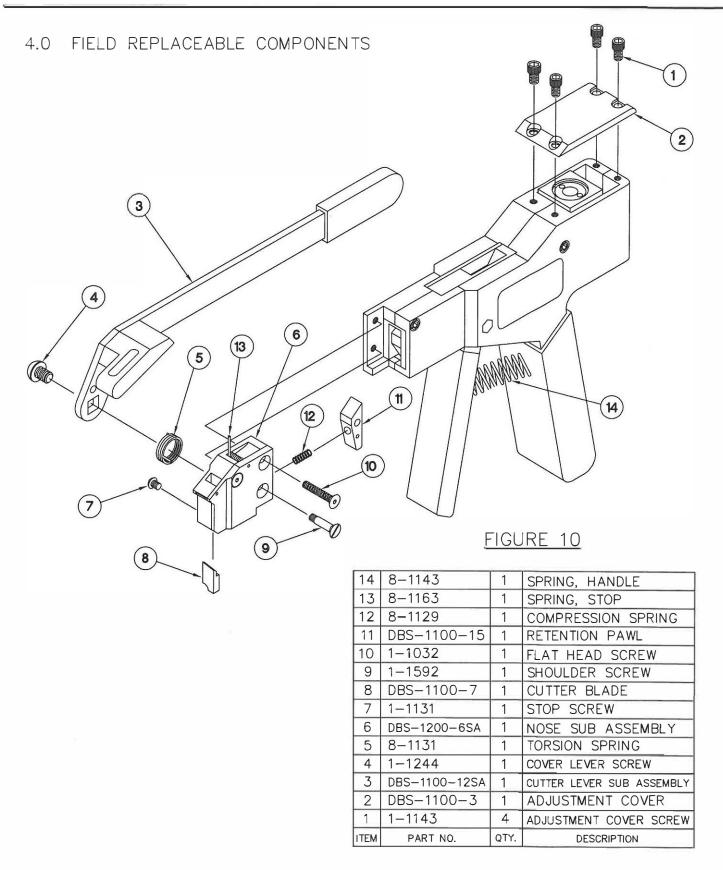

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru 4 moschip.ru 9