


## 1 Form B Solid State Relay

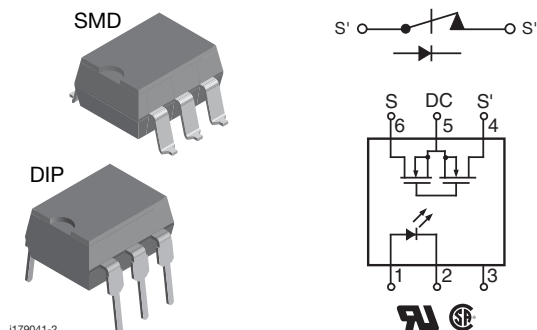

### DESCRIPTION

The LH1511 relays are SPST normally closed switches (1 form B) that can replace electromechanical relays in many applications. The relays are constructed as a multi-chip hybrid device. Actuation control is via an infrared LED. The output switch is a combination of a photodiode array with MOSFET switches and control circuitry. The relays can be configured for AC/DC or DC only operation.

### FEATURES

- Isolation test voltage 3750 V<sub>RMS</sub>
- Typical R<sub>ON</sub> 10 Ω
- Load voltage 200 V
- Clean bounce free switching
- Low power consumption
- SMD lead available on tape and reel
- Compliant of RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC



**RoHS**  
COMPLIANT

### APPLICATIONS



- General telecom switching
- Security equipment
- Instrumentation
- Industrial controls

### AGENCY APPROVALS

UL1577: file no. E52744

CSA: certification 093751

### ORDERING INFORMATION

|                                |              |              |              |              |              |                      |                    |              |                  |              |                                                                                                  |                                                                                                  |
|--------------------------------|--------------|--------------|--------------|--------------|--------------|----------------------|--------------------|--------------|------------------|--------------|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| <div>L</div>                   | <div>H</div> | <div>1</div> | <div>5</div> | <div>1</div> | <div>1</div> | <div>B</div>         | <div>#</div>       | <div>#</div> | <div>T</div>     | <div>R</div> | <div></div> | <div></div> |
| PART NUMBER                    |              |              |              |              |              | ELECTR.<br>VARIATION | PACKAGE<br>CONFIG. |              | TAPE AND<br>REEL |              | 7.62 mm                                                                                          | > 0.1 mm                                                                                         |
| PACKAGE                        |              |              |              |              |              |                      | UL, CSA            |              |                  |              |                                                                                                  |                                                                                                  |
| SMD-6, gullwing, tubes         |              |              |              |              |              |                      | LH1511BAB          |              |                  |              |                                                                                                  |                                                                                                  |
| SMD-6, gullwing, tape and reel |              |              |              |              |              |                      | LH1511BABTR        |              |                  |              |                                                                                                  |                                                                                                  |
| DIP-6, tubes                   |              |              |              |              |              |                      | LH1511BT           |              |                  |              |                                                                                                  |                                                                                                  |

### ABSOLUTE MAXIMUM RATINGS (T<sub>amb</sub> = 25 °C, unless otherwise specified)

| PARAMETER                                   | TEST CONDITION                         | SYMBOL            | VALUE         | UNIT             |
|---------------------------------------------|----------------------------------------|-------------------|---------------|------------------|
| <b>INPUT</b>                                |                                        |                   |               |                  |
| LED continuous forward current              |                                        | I <sub>F</sub>    | 50            | mA               |
| LED reverse voltage                         | I <sub>R</sub> ≤ 10 μA                 | V <sub>R</sub>    | 8             | V                |
| <b>OUTPUT</b>                               |                                        |                   |               |                  |
| DC or peak AC load voltage                  | I <sub>L</sub> ≤ 50 μA                 | V <sub>L</sub>    | 200           | V                |
| Continuous DC load current - bidirectional  |                                        | I <sub>L</sub>    | 200           | mA               |
| Continuous DC load current - unidirectional |                                        | I <sub>L</sub>    | 300           | mA               |
| Peak load current (single shot)             | t = 100 ms                             | I <sub>p</sub>    | 400           | mA               |
| <b>SSR</b>                                  |                                        |                   |               |                  |
| Ambient temperature range                   |                                        | T <sub>amb</sub>  | - 40 to + 85  | °C               |
| Storage temperature range                   |                                        | T <sub>stg</sub>  | - 40 to + 125 | °C               |
| Pin soldering temperature <sup>(1)</sup>    | t = 10 s max.                          | T <sub>sld</sub>  | 260           | °C               |
| Input to output isolation voltage           | t = 1 s, I <sub>ISO</sub> = 10 μA max. | V <sub>ISO</sub>  | 3750          | V <sub>RMS</sub> |
| Output power dissipation (continuous)       |                                        | P <sub>diss</sub> | 550           | mW               |

### Notes

- Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to absolute maximum ratings for extended periods of the time can adversely affect reliability.
- <sup>(1)</sup> Refer to reflow profile for soldering conditions for surface mounted devices (SMD). Refer to wave profile for soldering conditions for through hole devices (DIP).

| <b>ELECTRICAL CHARACTERISTICS</b> ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) |                                                |            |      |      |      |               |
|----------------------------------------------------------------------------------------------------------|------------------------------------------------|------------|------|------|------|---------------|
| PARAMETER                                                                                                | TEST CONDITION                                 | SYMBOL     | MIN. | TYP. | MAX. | UNIT          |
| <b>INPUT</b>                                                                                             |                                                |            |      |      |      |               |
| LED forward current, switch turn-on                                                                      | $I_L = \pm 200\text{ mA}$ , $t = 10\text{ ms}$ | $I_{Fon}$  | 0.2  | 0.9  |      | mA            |
| LED forward current, switch turn-off                                                                     | $V_L = \pm 150\text{ V}$                       | $I_{Foff}$ |      | 1    | 2    | mA            |
| LED forward voltage                                                                                      | $I_F = 10\text{ mA}$                           | $V_F$      | 1.15 | 1.26 | 1.45 | V             |
| <b>OUTPUT</b>                                                                                            |                                                |            |      |      |      |               |
| On-resistance, AC/DC: pin 4, 6 (+) to 5 (-)                                                              | $I_F = 0\text{ mA}$ , $I_L = 50\text{ mA}$     | $R_{ON}$   |      | 10   | 15   | $\Omega$      |
| On-resistance, DC: pin 4, 6 (+) to 5 (-)                                                                 | $I_F = 0\text{ mA}$ , $I_L = 100\text{ mA}$    | $R_{ON}$   |      | 2.5  | 3.75 | $\Omega$      |
| Off-resistance                                                                                           | $I_F = 5\text{ mA}$ , $V_L = \pm 100\text{ V}$ | $R_{OFF}$  | 0.1  | 1.4  |      | $G\Omega$     |
| Off-state leakage current                                                                                | $I_F = 5\text{ mA}$ , $V_L = \pm 200\text{ V}$ | $I_O$      |      | 0.07 | 1    | $\mu\text{A}$ |
| Output capacitance                                                                                       | $I_F = 5\text{ mA}$ , $V_L = 50\text{ V}$      | $C_O$      |      | 50   |      | pF            |
| <b>TRANSFER</b>                                                                                          |                                                |            |      |      |      |               |
| Capacitance (input to output)                                                                            | $V_{ISO} = 1\text{ V}$                         | $C_{IO}$   |      | 3    |      | pF            |

## Note

- Minimum and maximum values are testing requirements. Typical values are characteristics of the device and are the result of engineering evaluations. Typical values are for information only and are not part of the testing requirements.

| <b>SWITCHING CHARACTERISTICS</b> ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) |                                             |           |      |      |      |      |
|---------------------------------------------------------------------------------------------------------|---------------------------------------------|-----------|------|------|------|------|
| PARAMETER                                                                                               | TEST CONDITION                              | SYMBOL    | MIN. | TYP. | MAX. | UNIT |
| Turn-on time                                                                                            | $I_F = 10\text{ mA}$ , $I_L = 50\text{ mA}$ | $t_{on}$  |      | 1.2  | 3    | ms   |
| Turn-off time                                                                                           | $I_F = 10\text{ mA}$ , $I_L = 50\text{ mA}$ | $t_{off}$ |      | 1    | 3    | ms   |

## TYPICAL CHARACTERISTICS ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified)

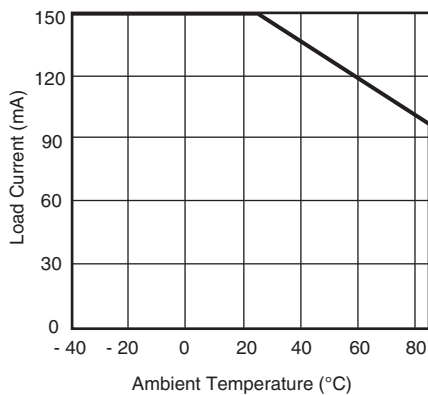


Fig. 1 - Recommended Operating Conditions





# LH1511BAB, LH1511BABTR, LH1511BT


1 Form B Solid State Relay

Vishay Semiconductors

## PACKAGE DIMENSIONS in millimeters

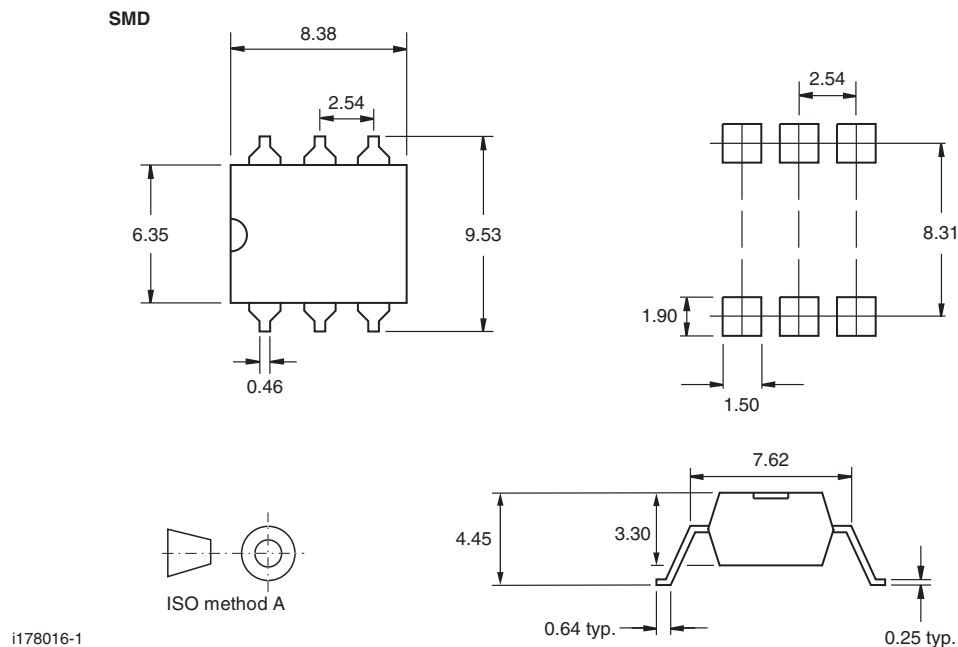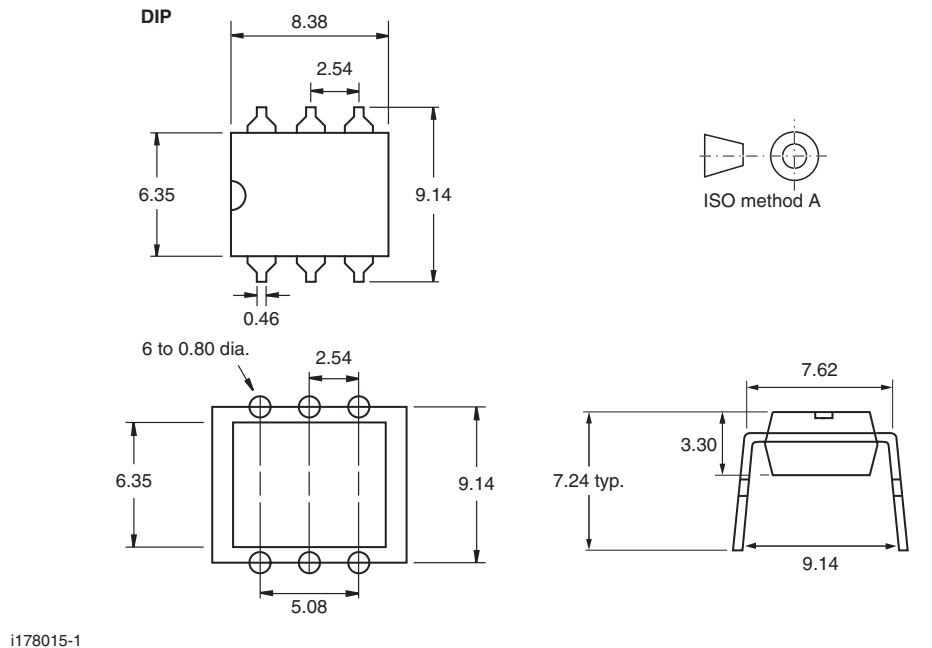

## PACKAGE MARKING (example)



### Note

- Tape and reel suffix (TR) is not part of the package marking.



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9