

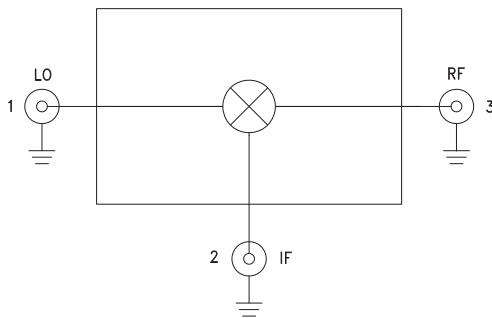


Typical Applications

The HMC-C049 is ideal for:

- Point-to-Point Radios
- Point-to-Multit-Point Radios
- Test Equipment & Sensors
- Military End-Use

Functional Diagram



Features

- Passive Double Balanced Topology
- High LO/RF Isolation: 48 dB
- Low Conversion Loss: 7 dB
- Wide IF Bandwidth: DC - 5 GHz
- Robust 1,000V ESD, Class 1C
- Hermetic Module

General Description

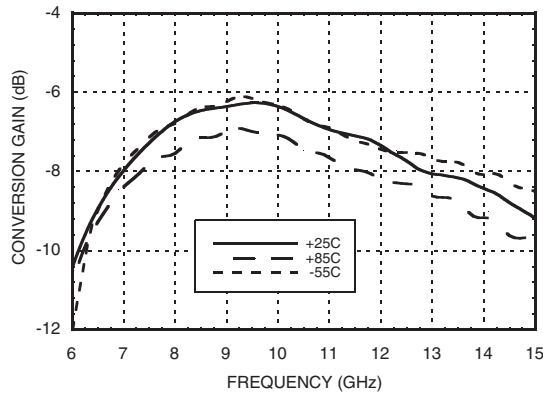
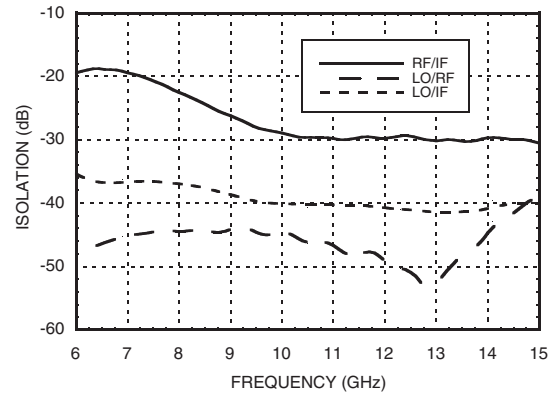
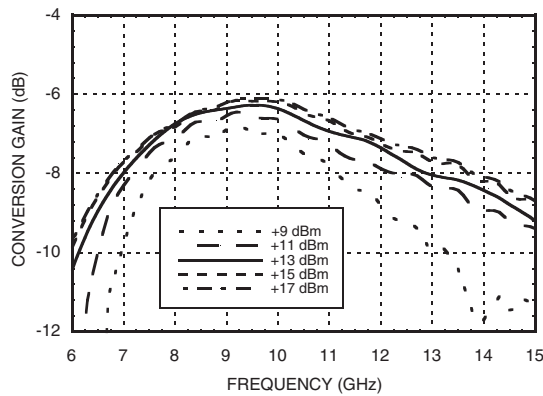
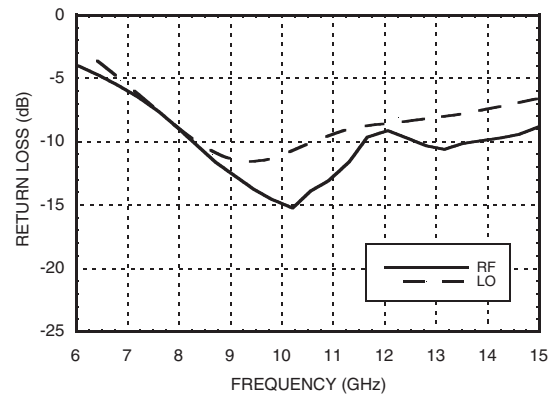
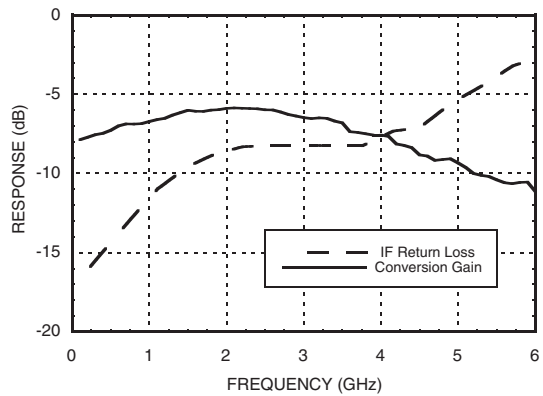
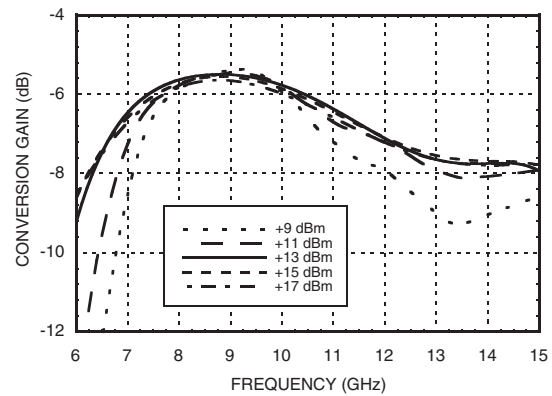
The HMC-C049 is a 7 - 14 GHz double balanced mixer which provides a low conversion loss, high isolation, and a wide IF bandwidth. This mixer does not require a DC bias and can operate with an LO power level of +9 dBm. The package is a hermetically sealed module that is assembled and tested to meet MIL-883-STD qualifications.

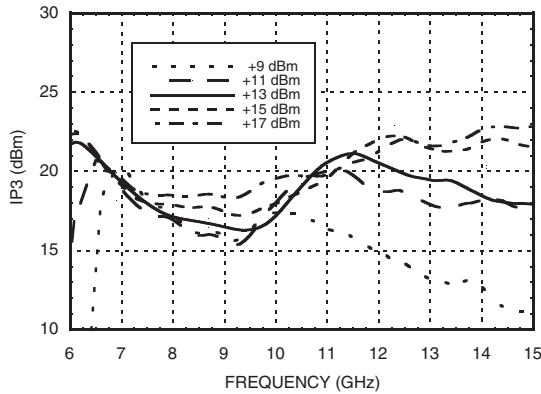
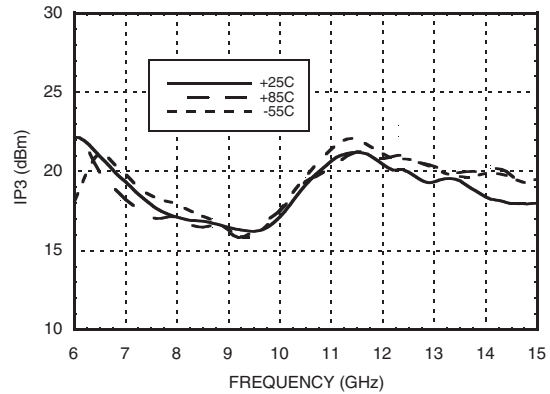
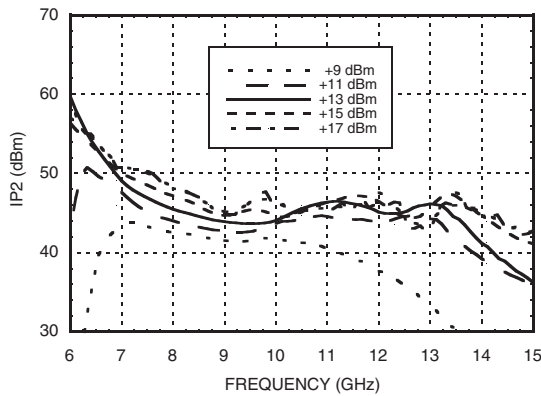
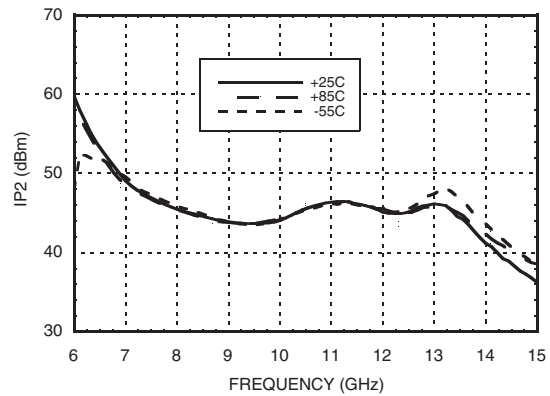
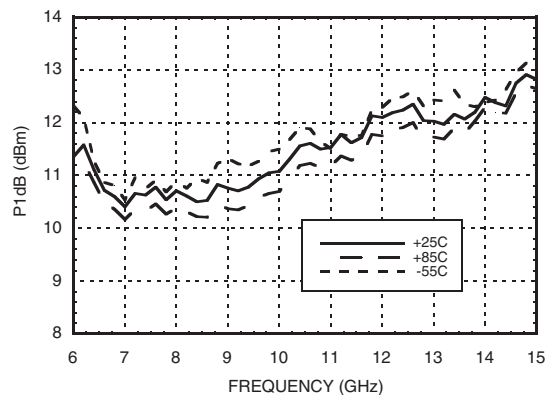
This product comes standard with three female SMA field replaceable connectors that can also be interchanged with blind mate SMP connectors or detached to allow direct connection of the I/O Pins to a microstrip or coplaner circuit.

Electrical Specifications, $T_A = +25^\circ \text{C}$, $IF = 100 \text{ MHz}$, $LO = +13 \text{ dBm}^*$

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range, RF & LO	7 - 11		11 - 14				GHz
Frequency Range, IF	DC - 5		DC - 5				GHz
Conversion Loss		7	9.5		8	11	dB
Noise Figure (SSB)		7			8		dB
LO to RF Isolation	37	48		35	45		dB
LO to IF Isolation	27	35		32	40		dB
RF to IF Isolation	12	22		22	30		dB
IP3 (Input)		18			20		dBm
IP2 (Input)		48			47		dBm
1 dB Compression (Input)		11			12		dBm

*Unless otherwise noted, all measurements performed as downconverter, $IF = 100 \text{ MHz}$.

**Conversion Gain vs. Temperature
 @ LO = +13 dBm**

Isolation @ LO = +13 dBm

Conversion Gain vs. LO Drive

Return Loss @ LO = +13 dBm

IF Bandwidth @ LO = +13 dBm

**Upconverter Performance
 Conversion Gain vs. LO Drive**


Input IP3 vs. LO Drive *

**Input IP3 vs. Temperature
@ LO = +13 dBm ***

Input IP2 vs. LO Drive *

**Input IP2 vs. Temperature
@ LO = +13 dBm ***

**Input P1dB vs. Temperature
@ LO = +13 dBm**


* Two-tone input power = -10 dBm each tone, 1 MHz spacing.


**GaAs MMIC FUNDAMENTAL
MIXER, 7 - 14 GHz**
Absolute Maximum Ratings

RF / IF Input	+25 dBm
LO Drive	+25 dBm
Channel Temperature	150 °C
Continuous Pdiss (T = 85 °C) (derate 2.75 mW/°C above 85 °C)	178 mW
Thermal Resistance (channel to ground paddle)	364 °C/W
Storage Temperature	-65 to +150 °C
Operating Temperature	-55 to +85 °C
ESD Sensitivity (HBM)	Class 1C

MxN Spurious Outputs

mRF	nLO				
	0	1	2	3	4
0	xx	11	36	24	39
1	23	0	37	37	60
2	88	86	61	80	89
3	97	92	93	71	91
4	>120	>120	>120	>120	111

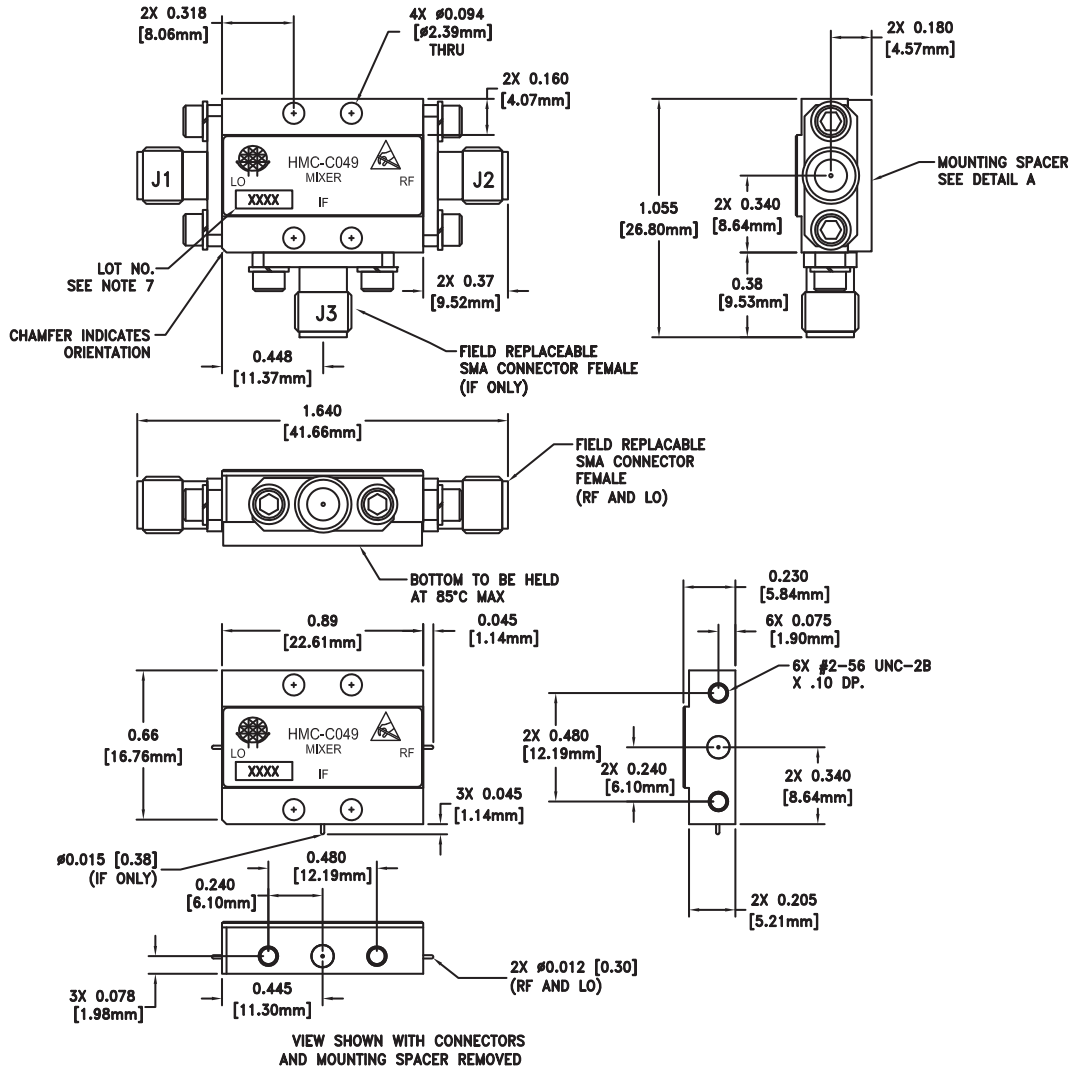
RF = 10.1 GHz @ -10 dBm
LO = 10 GHz @ +13 dBm
All values in dBc below the IF output power level.



**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**

LO Freq. (MHz)	nLO			
	1	2	3	4
5.9	47	40	56	85
6.9	95	45	60	99
7.9	44	37	64	71
8.9	44	41	68	75
9.9	44	46	72	75
10.9	47	51	62	76
11.9	48	52	58	74
12.9	47	54	59	xx
13.9	42	57	60	xx
14.9	39	59	61	xx

Outline Drawing



Package Information

Package Type	C-11
Package Weight [1]	20 gms [2]
Spacer Weight	2.6 gms [2]




[1] Includes the connectors

[2] ±1 gms Tolerance

NOTES:

1. PACKAGE, LEADS, COVER MATERIAL: KOVART™
2. FINISH: GOLD PLATE OVER NICKEL PLATE.
3. MOUNTING SPACER NICKEL PLATED ALUMINUM.
4. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
5. TOLERANCES:
 - 5.1 .XX = ±.02
 - 5.2 .XXX = ±.010
6. MARK LOT NUMBER ON 0.080 X 0.250 LABEL WHERE SHOWN, WITH 0.030" MIN TEXT HEIGHT.
7. MOUNTING SPACER PART NUMBER 109812.


Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1	LO	This pin is DC coupled and matched to 50 Ohms.	
2	IF	This pin is DC coupled. For applications not requiring operation to DC, this port should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary IF frequency range. For operation to DC, this pin must not source or sink more than 2 mA of current or part non-function and possible part failure will result.	
3	RF	This pin is DC coupled and matched to 50 Ohms.	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9