



## Introducing SOLARLOK PV4 Connector

The SOLARLOK PV4 connector is the sophisticated connectivity solution for thin-film and crystalline panel manufacturers and installers. This robust and weather-proof, IP68 compliant connector is engineered for reliable performance in demanding and harsh environments. With its audible snap-in and lock feature, the connector withstands accidental pulls without any interruptions and provides a stable and safe connection. This SOLARLOK solution, which is easy to assemble with the typical connectors and tooling in the market, offers lower contact resistance compared to our standard line and thus maximizes the total power output.

### KEY FEATURES

- Lower contact resistance compared to standard line
- Conformance with NEC 2008/11 requirement
- Audible snap-in and lock mating design
- One of highest IP68 protection in its class
- Quick and easy assembly with industry application tools

### APPLICATIONS

- Connection between panels
- Connection to inverter

### MATERIALS

- Housing: PC
- Contact: tin copper

### MECHANICAL

- Product Dimensions:  
L 62.5 mm x W 24.5 mm
- Diameter: 18.7 mm (.74 inch)
- Protection Degree: IP 68 (1 m/24 hr)


### ELECTRICAL

- UL 20 A and TÜV 35 A for 4.0 mm<sup>2</sup> (at 85 °C)
- UL 30 A and TÜV 40 A for 6.0 mm<sup>2</sup> (at 85 °C)
- Rated Voltage: 600 V / 1000 V (UL); 1000 V (TÜV)
- Contact Resistant: 0.50 mΩ typical

### STANDARDS AND SPECIFICATIONS

- UL approved
- TÜV approved

### PRODUCT DIMENSIONS

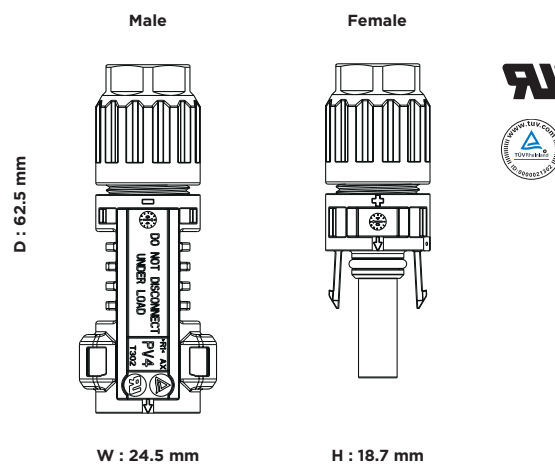

[te.com/products/solarlok-pv4](http://te.com/products/solarlok-pv4)





Crimping Tool, PN 6-1579014-8



Field Tool - multiple functions, PN 1971903-1

**PRODUCT OFFERING**

**Female Cable Coupler (kit with Socket contact), Plus polarity**

Gen. 4 Seal PNs Cable Outer Diameter 5.8 to 8.0 mm	Gen. 2 Seal PNs Cable Outer Diameter 4.5 to 6.2 mm	Package Quantity
1971862-1	1971862-2	1000
2-1971862-1	2-1971862-2	100

**Male Cable Coupler (kit with Pin contact), Minus polarity**

Gen. 4 Seal PNs Cable Outer Diameter 5.8 to 8.0 mm	Gen. 2 Seal PNs Cable Outer Diameter 4.5 to 6.2 mm	Package Quantity
1971861-1	1971861-2	1000
2-1971861-1	2-1971861-2	100

Reverse Polarity available upon request

**Female Cable Coupler w/out contact, Plus polarity**

Gen. 4 Seal PNs Cable Outer Diameter 5.8 to 8.0 mm	Gen. 2 Seal PNs Cable Outer Diameter 4.5 to 6.2 mm	Package Quantity
1971915-1	1971915-2	1000

**Male Cable Coupler w/out contact, Minus polarity**

Gen. 4 Seal PNs Cable Outer Diameter 5.8 to 8.0 mm	Gen. 2 Seal PNs Cable Outer Diameter 4.5 to 6.2 mm	Package Quantity
1971914-1	1971914-2	1000

**Pin Contact, Wire size 4-6 mm<sup>2</sup> (12-10 AWG)**

Part Number	Supply Condition	Package Quantity
1971857-2	On Reel	2000
1971857-3	Loose Piece	1000

**Socket Contact, Wire size 4-6 mm<sup>2</sup> (12-10 AWG)**

Part Number	Supply Condition	Package Quantity
1971858-2	On Reel	2000
1971858-3	Loose Piece	1000

**Field Tool - multiple functions (according to NEC 2008/2012)**

Part Number	Package Quantity
1971903-1	100

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

[te.com/products/solarlok-pv4](http://te.com/products/solarlok-pv4)



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9