THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

PROJECT	PRJ–16–000909157
PART NO.	X–2308340–X
DESCRIPTION	FULL METAL HOODS SIZE 1
CUSTOMER	GENERAL MARKET

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	REVISED PER ECR–16–013123	19SEP2016	KK	GG

1–2308340–3

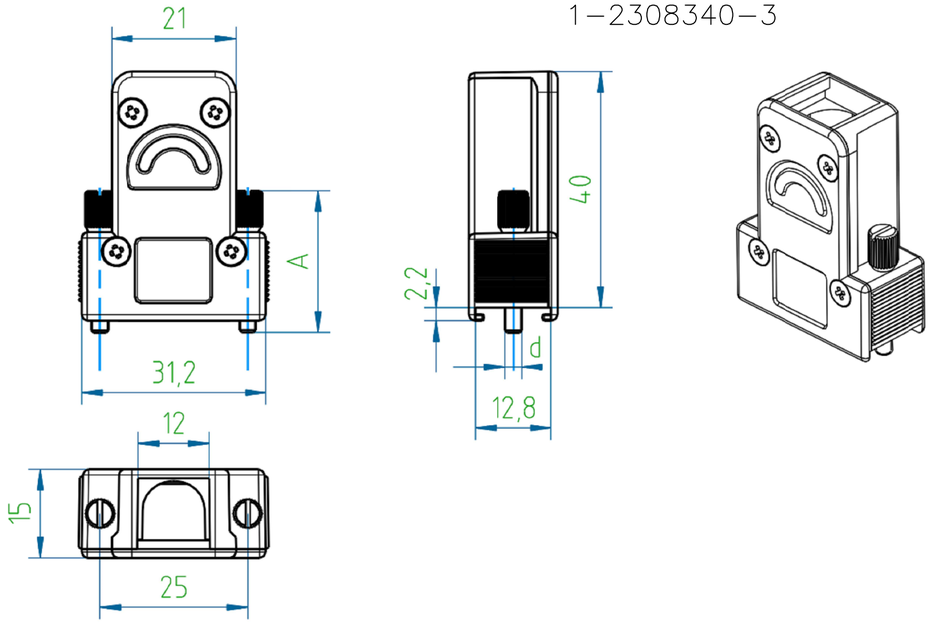

2–2308340–1

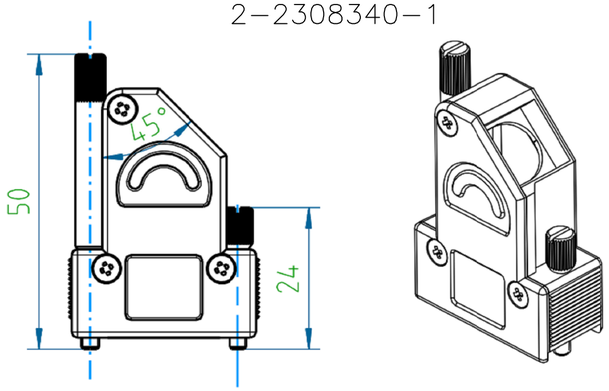

Case

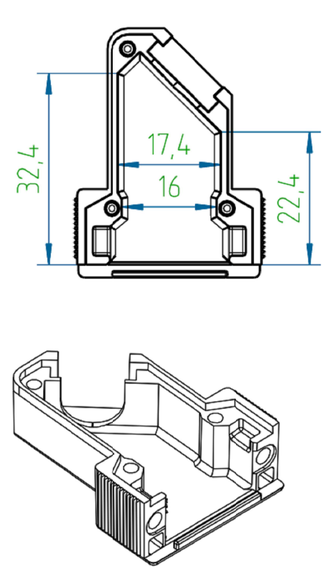

Case

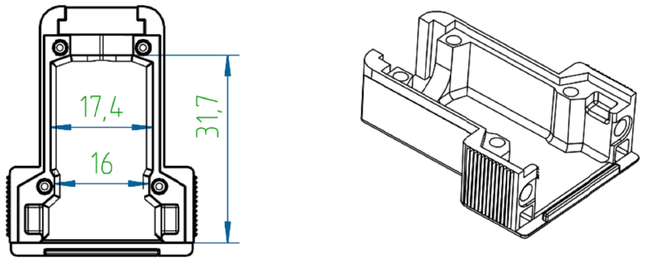

NOTES:

1. FINISH:
   1–2308340–1 TO 2–2308340–2 – CASE RAW.
   2–2308340–3 TO 3–2308340–4 – CASE NICKEL–PLATED.
2. LOCKING SCREWS: NICKEL–PLATED
   OTHER SCREWS: ZINC–PLATED
3. TEMPERATURE RANGE: –40°C TO +90°C
4. CABLE DIAMETER WITH EXTERNAL DIAMETER CABLE CLAMP: 4–14 mm.
5. STRAND DIAMETER OF CRIMP FLANGE: 2.7–8.7 mm.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: DIN ISO 2768–m DIN 16901 130B

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL: –

FINISH: –

DWN	KIRAN K 02AUG2016
CHK	GUNASEKHAR G 02AUG2016
APVD	GUNASEKHAR G 02AUG2016
PRODUCT SPEC	–
APPLICATION SPEC	–
WEIGHT	

TE Connectivity

NAME: FULL METAL HOODS SIZE 1

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C–2308340	–

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 2 | REV A1

2308340

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	–	–

–	–	2–2308340–2	FULL METAL HOODS SIZE1–12	1–2308334–6	1–2308334–4	LOCKING SCREW (M3 LONG KNURLED)	LOCKING SCREW (M3 SHORT KNURLED)	S OVER	M3	43
–	–	2–2308340–1	FULL METAL HOODS SIZE1–11	1–2308334–5	1–2308334–3	LOCKING SCREW (4–40 UNC LONG KNURLED)	LOCKING SCREW (4–40 UNC SHORT KNURLED)		4–40 UNC	43
1–2308340–6	FULL METAL HOODS SIZE1–6	–	–	1–2308334–6		LOCKING SCREW (M3 LONG KNURLED)		50.0	M3	47
1–2308340–5	FULL METAL HOODS SIZE1–5	–	–	1–2308334–5		LOCKING SCREW (4–40 UNC LONG KNURLED)		50.0	4–40 UNC	47
1–2308340–4	FULL METAL HOODS SIZE1–4	2–2308340–0	FULL METAL HOODS SIZE1–10	1–2308334–4		LOCKING SCREW (M3 SHORT KNURLED)		24.0	M3	39
1–2308340–3	FULL METAL HOODS SIZE1–3	1–2308340–9	FULL METAL HOODS SIZE1–9	1–2308334–3		LOCKING SCREW (4–40 UNC SHORT KNURLED)		24.0	4–40 UNC	39
1–2308340–2	FULL METAL HOODS SIZE1–2	1–2308340–8	FULL METAL HOODS SIZE1–8	1–2308334–2		LOCKING SCREW (M3 W/SPRING WASHER)		20.7	M3	38
1–2308340–1	FULL METAL HOODS SIZE1–1	1–2308340–7	FULL METAL HOODS SIZE1–7	1–2308334–1		LOCKING SCREW (4–40 UNC W/SPRING WASHER)		20.7	4–40 UNC	38
PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	SUB–PART NO.		DESCRIPTION		A	d	WEIGHT, g
VERSION 180°		VERSION 135°		LOCKING SCREWS						
PART NO. (CASE RAW)										

–	–	3–2308340–4	FULL METAL HOODS SIZE1–24	1–2308334–6	1–2308334–4	LOCKING SCREW (M3 LONG KNURLED)	LOCKING SCREW (M3 SHORT KNURLED)	S OVER	M3	43
–	–	3–2308340–3	FULL METAL HOODS SIZE1–23	1–2308334–5	1–2308334–3	LOCKING SCREW (4–40 UNC LONG KNURLED)	LOCKING SCREW (4–40 UNC SHORT KNURLED)		4–40 UNC	43
2–2308340–8	FULL METAL HOODS SIZE1–18	–	–	1–2308334–6		LOCKING SCREW (M3 LONG KNURLED)		50.0	M3	47
2–2308340–7	FULL METAL HOODS SIZE1–17	–	–	1–2308334–5		LOCKING SCREW (4–40 UNC LONG KNURLED)		50.0	4–40 UNC	47
2–2308340–6	FULL METAL HOODS SIZE1–16	3–2308340–2	FULL METAL HOODS SIZE1–22	1–2308334–4		LOCKING SCREW (M3 SHORT KNURLED)		24.0	M3	39
2–2308340–5	FULL METAL HOODS SIZE1–15	3–2308340–1	FULL METAL HOODS SIZE1–21	1–2308334–3		LOCKING SCREW (4–40 UNC SHORT KNURLED)		24.0	4–40 UNC	39
2–2308340–4	FULL METAL HOODS SIZE1–14	3–2308340–0	FULL METAL HOODS SIZE1–20	1–2308334–2		LOCKING SCREW (M3 W/SPRING WASHER)		20.7	M3	38
2–2308340–3	FULL METAL HOODS SIZE1–13	2–2308340–9	FULL METAL HOODS SIZE1–19	1–2308334–1		LOCKING SCREW (4–40 UNC W/SPRING WASHER)		20.7	4–40 UNC	38
PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	SUB–PART NO.		DESCRIPTION		A	d	WEIGHT, g
VERSION 180°		VERSION 135°		LOCKING SCREWS						
PART NO. (CASE Ni–PLATED)										

NOTE:

* CRIMP FLANGE PN *–2308349–* TO BE ORDERED SEPARATELY.
* CRIMP BARREL TO BE USED IN COMBINATION WITH THE FLANGE PN *–2308350–* TO BE ORDERED SEPARATELY.
* CABLE CLAMP SCREW VERSION PN *–2308272–* TO BE ORDERED SEPARATELY.



CRIMP FLANGE

CRIMP BARREL

CABLE CLAMP

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: DIN ISO 2768–m DIN 16901 130B
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN	KIRAN K	02AUG2016
CHK	GUNASEKHAR G	02AUG2016
APVD	GUNASEKHAR G	02AUG2016
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT		

TE Connectivity

NAME: FULL METAL HOODS SIZE 1

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C–2308340	–

CUSTOMER DRAWING | SCALE NTS | SHEET 2 OF 2 | REV A1

2308340

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9