
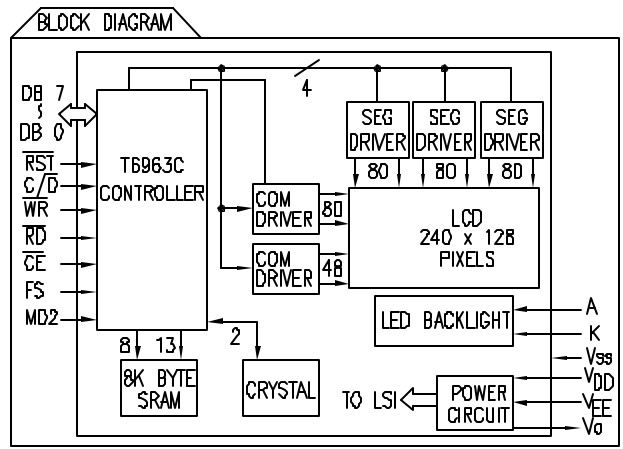
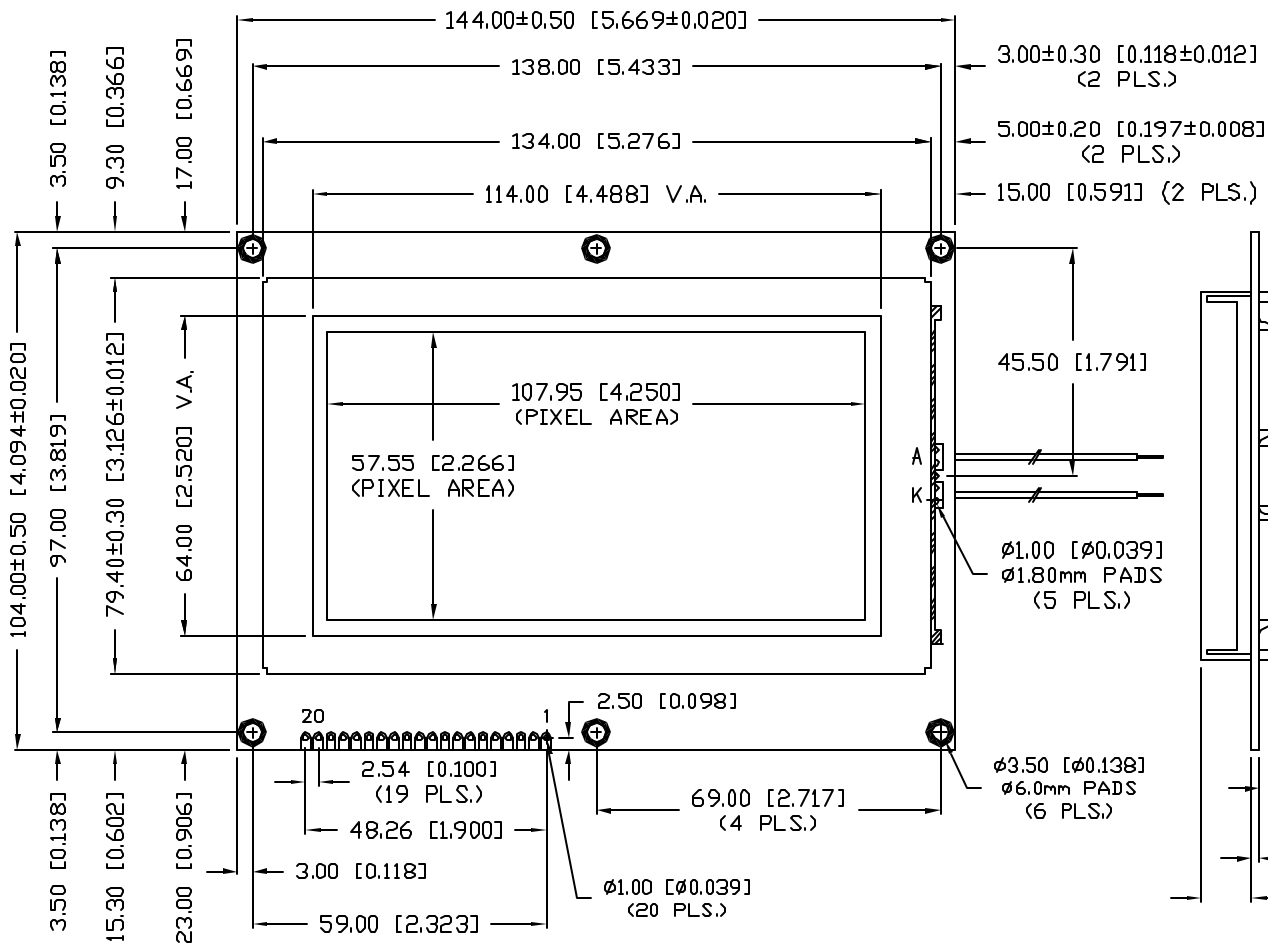


UNCONTROLLED DOCUMENT

PART NUMBER		REV.
LCM-H240128GSN-1WC		A
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	4.20.07

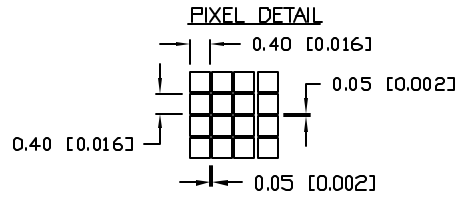

NOTES:

1. RED WIRE: ANODE, 150mm, 24AWG, 5mm STRIPPED END.
2. BLACK WIRE: GND, 150mm, 24AWG, 5mm STRIPPED END.

CAUTION: STATIC SENSITIVE DEVICE
FOLLOW PROPER E.S.D. HANDLING PROCEDURES
WHEN WORKING WITH THIS PART.

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN=+DECIMAL PRECISION MAX.=+0.00 -DECIMAL PRECISION

REV.	PART NUMBER
A	LCM-H240128GSN-1WC

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

240 x 128 DOT MATRIX GRAPHIC MODULE, STN BLUE, NEGATIVE IMAGE, TRANSMISIVE, WHITE LED BACKLIGHT, HIGH OPERATING TEMP, 1/128 DUTY, 12:00 VIEW.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.


DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 1.17.06
JC			PAGE: 1 OF 2
			SCALE: N/A

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	SEE APGE #1	


ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	MIN.	MAX.	UNIT
POWER SUPPLY FOR LOGIC	$V_{DD}-V_{SS}$	0	6.5	V
POWER SUPPLY FOR LCD DRIVING	$V_{DD}-V_{EE}$	0	22.0	V
INPUT VOLTAGE	V_I	V_{SS}	V_{DD}	V
STATIC ELECTRICITY			100	V

$V_{DD}-V_o$: LCD DRIVING VOLTAGE
VR: 10K Ω - 20K Ω

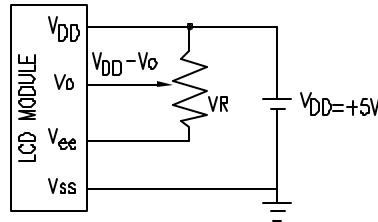

TIMING OF POWER SUPPLY AND INTERFACE SIGNAL

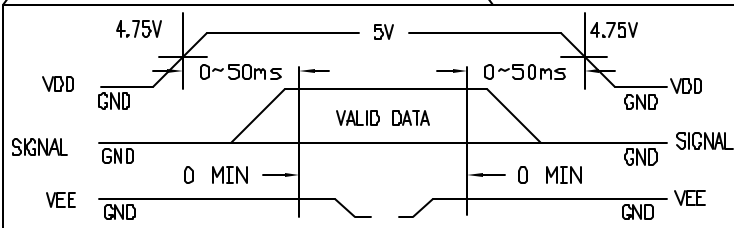

PIN CONFIGURATION

PIN #	SYMBOL	LEVEL	FUNCTION
1	V_{SS}	-	GROUND (0V)
2	V_{DD}	-	POWER SUPPLY FOR LOGIC CIRCUIT
3	V_o	-	OPERATING VOLTAGE FOR LCD DRIVING
4	C/D	H/L	\overline{WR} ="L", C/D="H": COMMAND WRITE, "L": DATA WRITE \overline{RD} ="L", C/D="H": STATUS READ, "L": DATA READ
5	\overline{RD}	L	DATA READ
6	\overline{WR}	L	DATA WRITE
7~14	DB0~DB7	H/L	DATA BUS LINE
15	\overline{CE}	L	CHIP ENABLE
16	RST	L	RESET
17	V_{EE}	-	POWER SUPPLY FOR LCD DRIVING
18	MD2	H/L	COLUMNS SELECT: "H": 32 COLUMNS, "L": 40 COLUMNS
19	FS	H/L	FONT SELECT: "H": 6*8 PIXEL/FONT, "L": 8*8 PIXEL/FONT
20	N.C.	-	
	A	-	POWER SUPPLY FOR LED BACKLIGHT (ANODE)
	K	-	POWER SUPPLY FOR LED BACKLIGHT (CATHODE)

OPTO-ELECTRICAL CHARACTERISTICS

ITEM	SYMBOL	STANDARD VALUE			UNIT		
		MIN.	TYP.	MAX.			
POWER SUPPLY VOLTAGE FOR LOGIC	$V_{DD}-V_{SS}$	+4.75	+5.0	+5.25	V		
NEGATIVE POWER SUPPLY VOLTAGE FOR LCD DRIVE	$V_{EE}-V_{SS}$	-15.5	-16.0	-16.5	V		
INPUT VOLTAGE: NOTE (1)	H LEVEL	V_{IH}	2.2	-	V		
	L LEVEL	V_{IL}	0	0.8	V		
OUTPUT VOLTAGE: NOTE (2)	H LEVEL	V_{OH}	2.4	V_{DD}	V		
	L LEVEL	V_{OL}	0	0.4	V		
POWER SUPPLY CURRENT FOR LOGIC: NOTE (4)	I_{DD}	-	12.0	-	mA		
POWER SUPPLY CURRENT FOR LCD DRIVE: NOTE (4)	I_{EE}	-	5.0	-	mA		
RECOMMENDED LCD DRIVING VOLTAGE: (NOTE 3)	$T_a=0^\circ\text{C}$	$V_{DD}-V_o$	-	+19.4	V		
	$T_a=25^\circ\text{C}$	$\Phi=10^\circ\text{C}$	-	+18.5	V		
	$T_a=50^\circ\text{C}$	$\theta=0^\circ\text{C}$	-	+16.2	V		
CLOCK OSCILLATION FREQUENCY	f_{osc}	-	5	-	MHZ		
*LED BACKLIGHT	VOLTAGE	$I_f=160\text{mA}$	V_f	-	3.4	3.6	V
	CURRENT	-	I_f	-	160	-	mA
	POWER CONSUMPTION	-	PD	-	720	-	mW
	BACKLIGHT SURFACE	$I_f=160\text{mA}$	L	160	200	-	cd/m ²
	COLOR (X=0.31,Y=0.32)	-	-	-	550	-	nm

*ONLY APPLIES TO MODULES WITH BACKLIGHT

NOTE (1): APPLIED TO TERMINALS: FS, CE, \overline{WR} , \overline{RD} , C/D, DB0~DB7, \overline{RES} , MD2.

NOTE (2): APPLIED TO TERMINALS: DB0~DB7.

NOTE (3): RECOMMENDED LCD DRIVING VOLTAGE MAY FLUCTUATE ABOUT $\pm 1.0\text{V}$ BY EACH MODULE.

NOTE (4): $V_{DD}-V_{SS}=5.0\text{V}$, $V_{DD}-V_o=20.6\text{V}$.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X= ± 1 (± 0.039), XX= ± 0.5 (± 0.020), XXX= ± 0.25 (± 0.010), XXXX= ± 0.127 (± 0.005). LEAD SIZE= ± 0.05 (± 0.002), LEAD LENGTH= ± 0.75 (± 0.030), MIN.= +DECIMAL PRECISION -0.00, MAX.= +0.00 -DECIMAL PRECISION

REV. A	PART NUMBER LCM-H240128GSN-1W
-----------	----------------------------------

240 x 128 DOT MATRIX GRAPHIC MODULE, STN BLUE, NEGATIVE IMAGE, TRANSMISIVE, WHITE LED BACKLIGHT, HIGH OPERATING TEMP, 1/128 DUTY, 12:00 VIEW.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY: jc	CHECKED BY:	APPROVED BY:	DATE: 1.17.06
			PAGE: 2 OF 2
			SCALE: N/A

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9