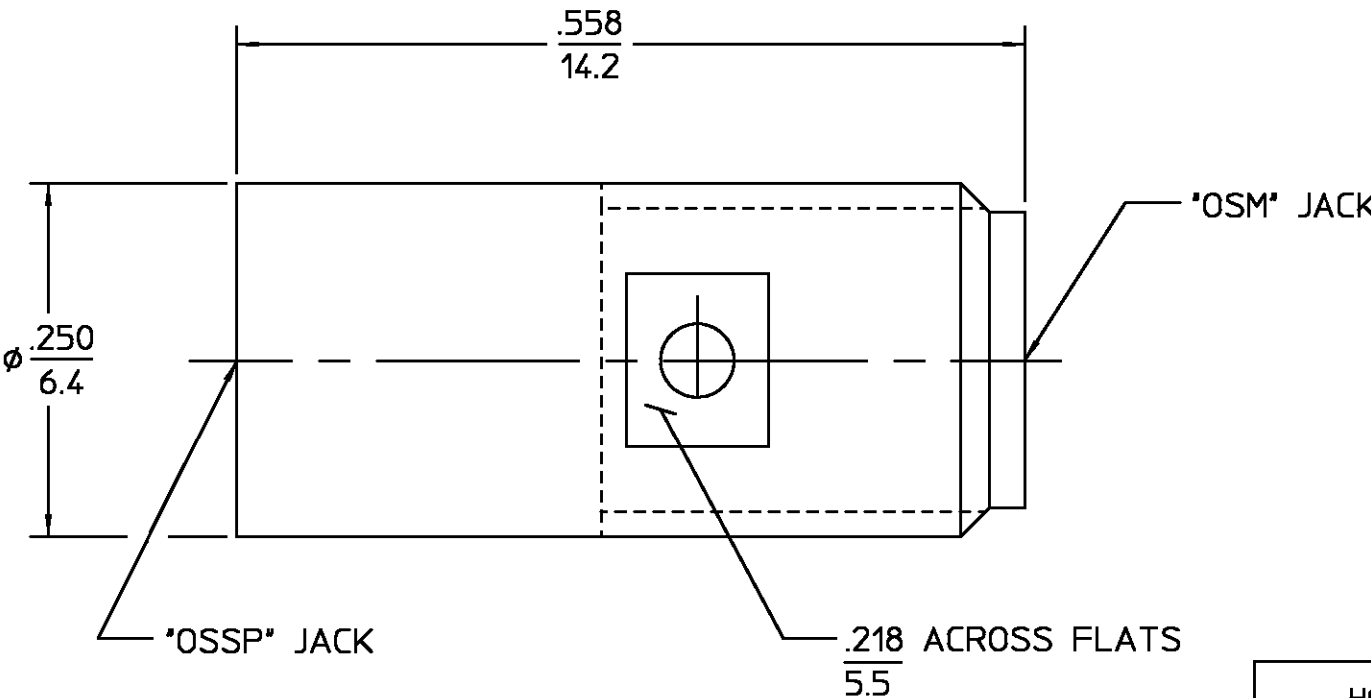


			REVISIONS																																																																				
			REV	DESCRIPTION	DATE	APPROVED																																																																	
			01 ₁	REVISED	8/26/97																																																																		
<table><tr><td>ELECTRICAL</td><td>MECHANICAL</td><td>ENVIRONMENTAL</td></tr><tr><td>Nominal Impedance (Ohms) 50</td><td>Interface Dimensions Per</td><td>Temperature Rating -65°C to +125°C</td></tr><tr><td>Frequency Range (GHz) DC to 18.0</td><td>OSM - MIL-STD-348A FIG. 310-2</td><td>Vibration MIL-STD-202, Method</td></tr><tr><td>Volt Rating (VRMS MAX)</td><td>OSSP - M/A-COM CATALOG</td><td>204, Condition D</td></tr><tr><td>Sea Level 250</td><td>Mating Characteristics:</td><td>Shock MIL-STD-202, Method 213,</td></tr><tr><td>VSWR 1.05±.010(fGHz)</td><td>Insertion 3.0</td><td>Condition I</td></tr><tr><td>Insertion Loss (dB MAX) .06√f(GHz)</td><td>Withdrawal 1.0</td><td>Thermal Shock MIL-STD-202,</td></tr><tr><td>RF Leakage (dB MIN) -(60-f(GHz))</td><td>Force to Engage/Disengage</td><td>Method 107, Condition B,</td></tr><tr><td>Corona, 70,000 Ft (VRMS MIN) 190</td><td>2.0</td><td>Except High Temp 85°C</td></tr><tr><td>Dielectric Withstanding Voltage</td><td>Contact Retention</td><td>Moisture Resistance MIL-STD-202,</td></tr><tr><td>(VRMS MIN) Sea Level 750</td><td>Axial (Lbs) 6.0</td><td>Method 106 Shall Be Omitted</td></tr><tr><td>Contact Resistance (Milliohms MAX)</td><td>Radial (In-Oz) 4.0</td><td>Corrosion - MIL-STD-202, Method</td></tr><tr><td>Center Contact 2.0</td><td>Weight (Grams) TBD</td><td>101, Condition B, 5% salt spray</td></tr><tr><td>Outer Contact 2.0</td><td></td><td></td></tr><tr><td>RF High Potential Sea Level</td><td></td><td></td></tr><tr><td>(VRMS MIN 5 MHz) 500</td><td></td><td></td></tr><tr><td>I.R.(Megohms MIN) 5,000</td><td></td><td></td></tr></table>			ELECTRICAL	MECHANICAL	ENVIRONMENTAL	Nominal Impedance (Ohms) 50	Interface Dimensions Per	Temperature Rating -65°C to +125°C	Frequency Range (GHz) DC to 18.0	OSM - MIL-STD-348A FIG. 310-2	Vibration MIL-STD-202, Method	Volt Rating (VRMS MAX)	OSSP - M/A-COM CATALOG	204, Condition D	Sea Level 250	Mating Characteristics:	Shock MIL-STD-202, Method 213,	VSWR 1.05±.010(fGHz)	Insertion 3.0	Condition I	Insertion Loss (dB MAX) .06√f(GHz)	Withdrawal 1.0	Thermal Shock MIL-STD-202,	RF Leakage (dB MIN) -(60-f(GHz))	Force to Engage/Disengage	Method 107, Condition B,	Corona, 70,000 Ft (VRMS MIN) 190	2.0	Except High Temp 85°C	Dielectric Withstanding Voltage	Contact Retention	Moisture Resistance MIL-STD-202,	(VRMS MIN) Sea Level 750	Axial (Lbs) 6.0	Method 106 Shall Be Omitted	Contact Resistance (Milliohms MAX)	Radial (In-Oz) 4.0	Corrosion - MIL-STD-202, Method	Center Contact 2.0	Weight (Grams) TBD	101, Condition B, 5% salt spray	Outer Contact 2.0			RF High Potential Sea Level			(VRMS MIN 5 MHz) 500			I.R.(Megohms MIN) 5,000			<table><tr><td>HOUSING</td><td>STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303</td><td>PASSIVATE PER QQ-P-35</td></tr><tr><td>DIELECTRIC</td><td>PTFE FLUOROCARBON PER ASTM-D-1457</td><td>N/A</td></tr><tr><td>CENTER CONTACT</td><td>BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H</td><td>GOLD PLATE PER MIL-G-45204</td></tr><tr><td>CONTACT SLEEVE</td><td>BERYLLIUM COPPER PER ASTM-B-196, ALLOY C17300, CONDITION H</td><td>GOLD PLATE PER MIL-G-45204</td></tr><tr><td>CONTACT RING</td><td>BERYLLIUM COPPER PER ASTM-B-194, ALLOY C17200, CONDITION H</td><td>GOLD PLATE PER MIL-G-45204</td></tr></table>			HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35	DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A	CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204	CONTACT SLEEVE	BERYLLIUM COPPER PER ASTM-B-196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204	CONTACT RING	BERYLLIUM COPPER PER ASTM-B-194, ALLOY C17200, CONDITION H	GOLD PLATE PER MIL-G-45204
ELECTRICAL	MECHANICAL	ENVIRONMENTAL																																																																					
Nominal Impedance (Ohms) 50	Interface Dimensions Per	Temperature Rating -65°C to +125°C																																																																					
Frequency Range (GHz) DC to 18.0	OSM - MIL-STD-348A FIG. 310-2	Vibration MIL-STD-202, Method																																																																					
Volt Rating (VRMS MAX)	OSSP - M/A-COM CATALOG	204, Condition D																																																																					
Sea Level 250	Mating Characteristics:	Shock MIL-STD-202, Method 213,																																																																					
VSWR 1.05±.010(fGHz)	Insertion 3.0	Condition I																																																																					
Insertion Loss (dB MAX) .06√f(GHz)	Withdrawal 1.0	Thermal Shock MIL-STD-202,																																																																					
RF Leakage (dB MIN) -(60-f(GHz))	Force to Engage/Disengage	Method 107, Condition B,																																																																					
Corona, 70,000 Ft (VRMS MIN) 190	2.0	Except High Temp 85°C																																																																					
Dielectric Withstanding Voltage	Contact Retention	Moisture Resistance MIL-STD-202,																																																																					
(VRMS MIN) Sea Level 750	Axial (Lbs) 6.0	Method 106 Shall Be Omitted																																																																					
Contact Resistance (Milliohms MAX)	Radial (In-Oz) 4.0	Corrosion - MIL-STD-202, Method																																																																					
Center Contact 2.0	Weight (Grams) TBD	101, Condition B, 5% salt spray																																																																					
Outer Contact 2.0																																																																							
RF High Potential Sea Level																																																																							
(VRMS MIN 5 MHz) 500																																																																							
I.R.(Megohms MIN) 5,000																																																																							
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35																																																																					
DIELECTRIC	PTFE FLUOROCARBON PER ASTM-D-1457	N/A																																																																					
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204																																																																					
CONTACT SLEEVE	BERYLLIUM COPPER PER ASTM-B-196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204																																																																					
CONTACT RING	BERYLLIUM COPPER PER ASTM-B-194, ALLOY C17200, CONDITION H	GOLD PLATE PER MIL-G-45204																																																																					
<table><tr><td>COMPONENT</td><td>MATERIAL</td><td>FINISH</td></tr></table>			COMPONENT	MATERIAL	FINISH																																																																		
COMPONENT	MATERIAL	FINISH																																																																					
<table><tr><td rowspan="2">UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES</td><td>DRAWN BY FN</td><td>DATE 6/18/84</td><td rowspan="2"></td><td rowspan="2">AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599</td></tr><tr><td>CHECKED BY SWA</td><td>12/6/84</td></tr><tr><td>FRAC. ± 1/64</td><td>DEC. ±.005</td><td>ANGLES ± 1°</td><td colspan="2">TITLE 'OSSP' JACK TO 'OSM' JACK ADAPTER</td></tr><tr><td colspan="3" rowspan="2">These drawings and specifications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.</td><td>USE ASSY PROCEDURE</td><td></td></tr><tr><td>NO. A.P. N/A</td><td></td></tr><tr><td colspan="3"></td><td>SIZE B</td><td>CODE IDENT NO. 26805</td></tr><tr><td colspan="3"></td><td>SCALE 8:1</td><td>4780-2240-02</td></tr><tr><td colspan="3"></td><td></td><td>REV 01₁</td></tr><tr><td colspan="3"></td><td></td><td>SHEET 1 OF 1</td></tr></table>			UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN BY FN	DATE 6/18/84		AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599	CHECKED BY SWA	12/6/84	FRAC. ± 1/64	DEC. ±.005	ANGLES ± 1°	TITLE 'OSSP' JACK TO 'OSM' JACK ADAPTER		These drawings and specifications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.			USE ASSY PROCEDURE		NO. A.P. N/A					SIZE B	CODE IDENT NO. 26805				SCALE 8:1	4780-2240-02					REV 01 ₁					SHEET 1 OF 1																														
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN BY FN	DATE 6/18/84			AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599																																																																		
	CHECKED BY SWA	12/6/84																																																																					
FRAC. ± 1/64	DEC. ±.005	ANGLES ± 1°	TITLE 'OSSP' JACK TO 'OSM' JACK ADAPTER																																																																				
These drawings and specifications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.			USE ASSY PROCEDURE																																																																				
			NO. A.P. N/A																																																																				
			SIZE B	CODE IDENT NO. 26805																																																																			
			SCALE 8:1	4780-2240-02																																																																			
				REV 01 ₁																																																																			
				SHEET 1 OF 1																																																																			

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9