



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

NOTES:




- 1 MATERIAL AND FINISH:
HOUSING: PA 6-6, UL 94V-0 RATED, COLOR: GREEN.
CLAMP: BRASS, NICKEL PLATED.
TERMINAL: BRASS, TIN PLATED.
CLAMPING SCREW: M3, BRASS, NICKEL PLATED.
- 2 MECHANICAL PROPERTIES
WIRE STRIPPING LENGTH : 5-6 mm
MIN. PC BOARD HOLES DIAMETER : 1.1mm
MAX. PC BOARD THICKNESS : 2.4mm
RECOMMENDED TORQUE FOR SCREW : 0.5 Nm.
- 3 ELECTRICAL PROPERTIES
WIRE RANGE : 16-30 AWG
MAX. VOLTAGE : 300 V
MAX CURRENT : 13.5 A
CONTACT RESISTANCE : <15 m Ohm
INSULATION RESISTANCE : >1000 M Ohm (500V DC)
- 4 END-TO-END STACKABLE W/INTERLOCK WITHOUT LOSS
OF CENTERLINE SPACING.
- 5 PACKED IN TRAY.
- 6 RECOGNIZED UNDER THE COMPONENT PROGRAM OF
UNDERWRITERS LABORATORIES INC. FILE NO E60677.
- 7 NOT CUMULATIVE TOLERANCE.
- 8 INK MARKING, WHITE COLOR, UNLESS OTHERWISE SPECIFIED.
NUMERICAL SEQUENCE FROM LEFT TO RIGHT, UNLESS OTHERWISE SPECIFIED.
- 9 OPERATING TEMPERATURE RANGE: -40°C TO +110°C
- 10 INK MARKING, BLACK COLOR

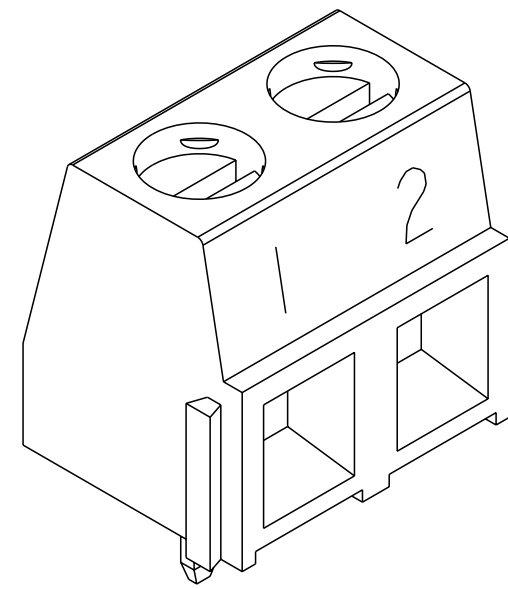


1-282836-3 AS SHOWN

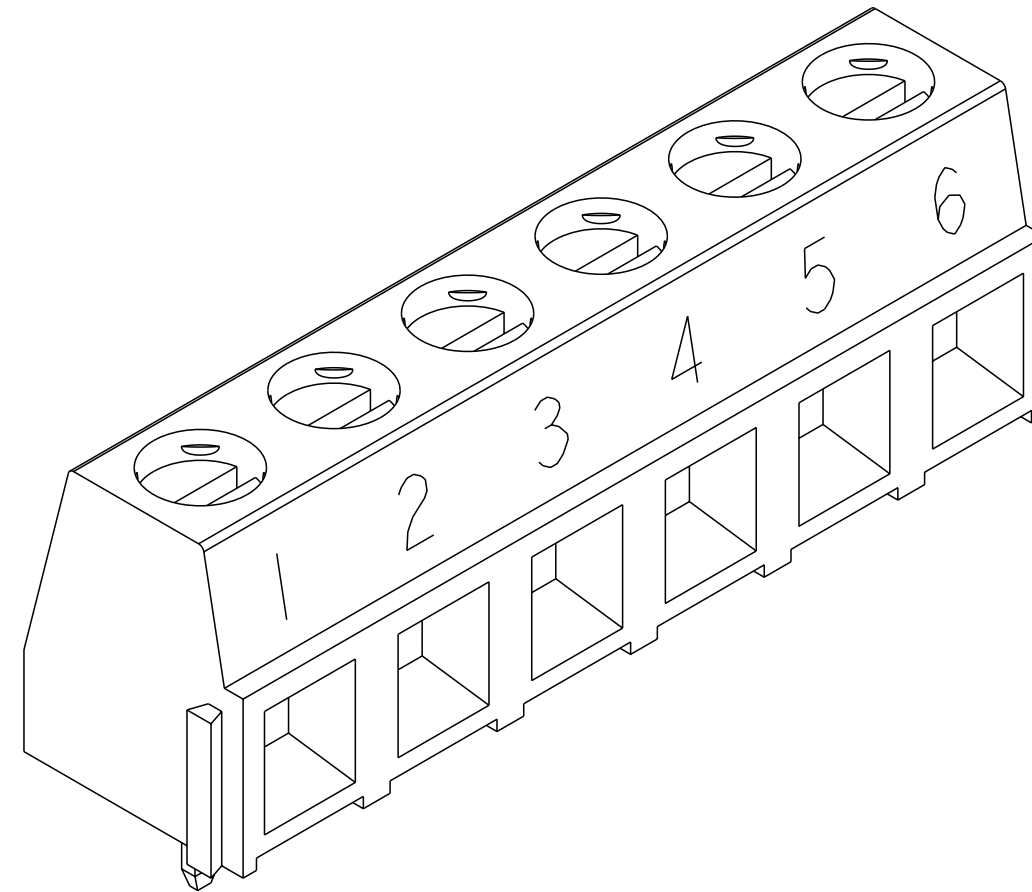

OBSOLETE ~~2-282836-7~~ AS SHOWN

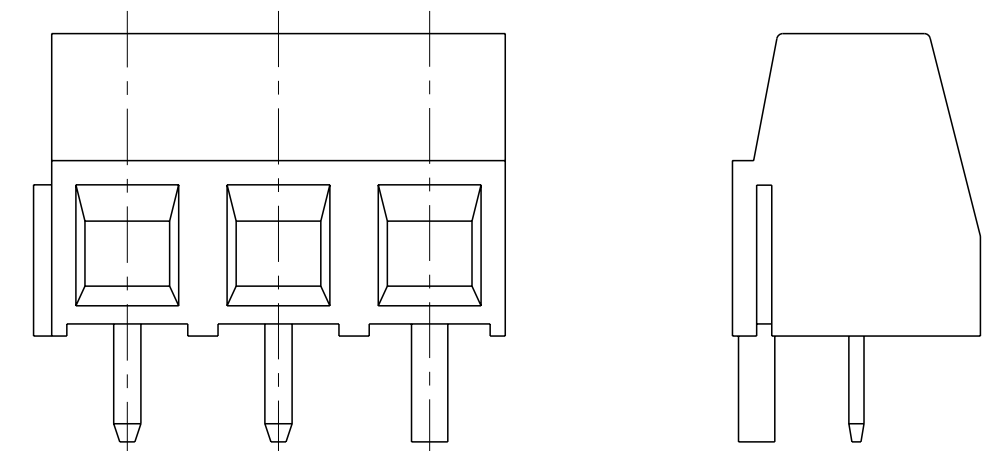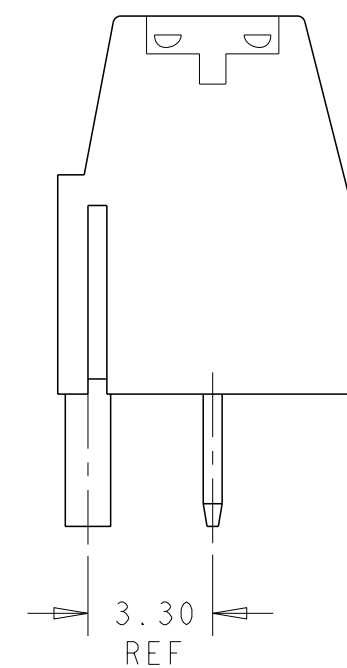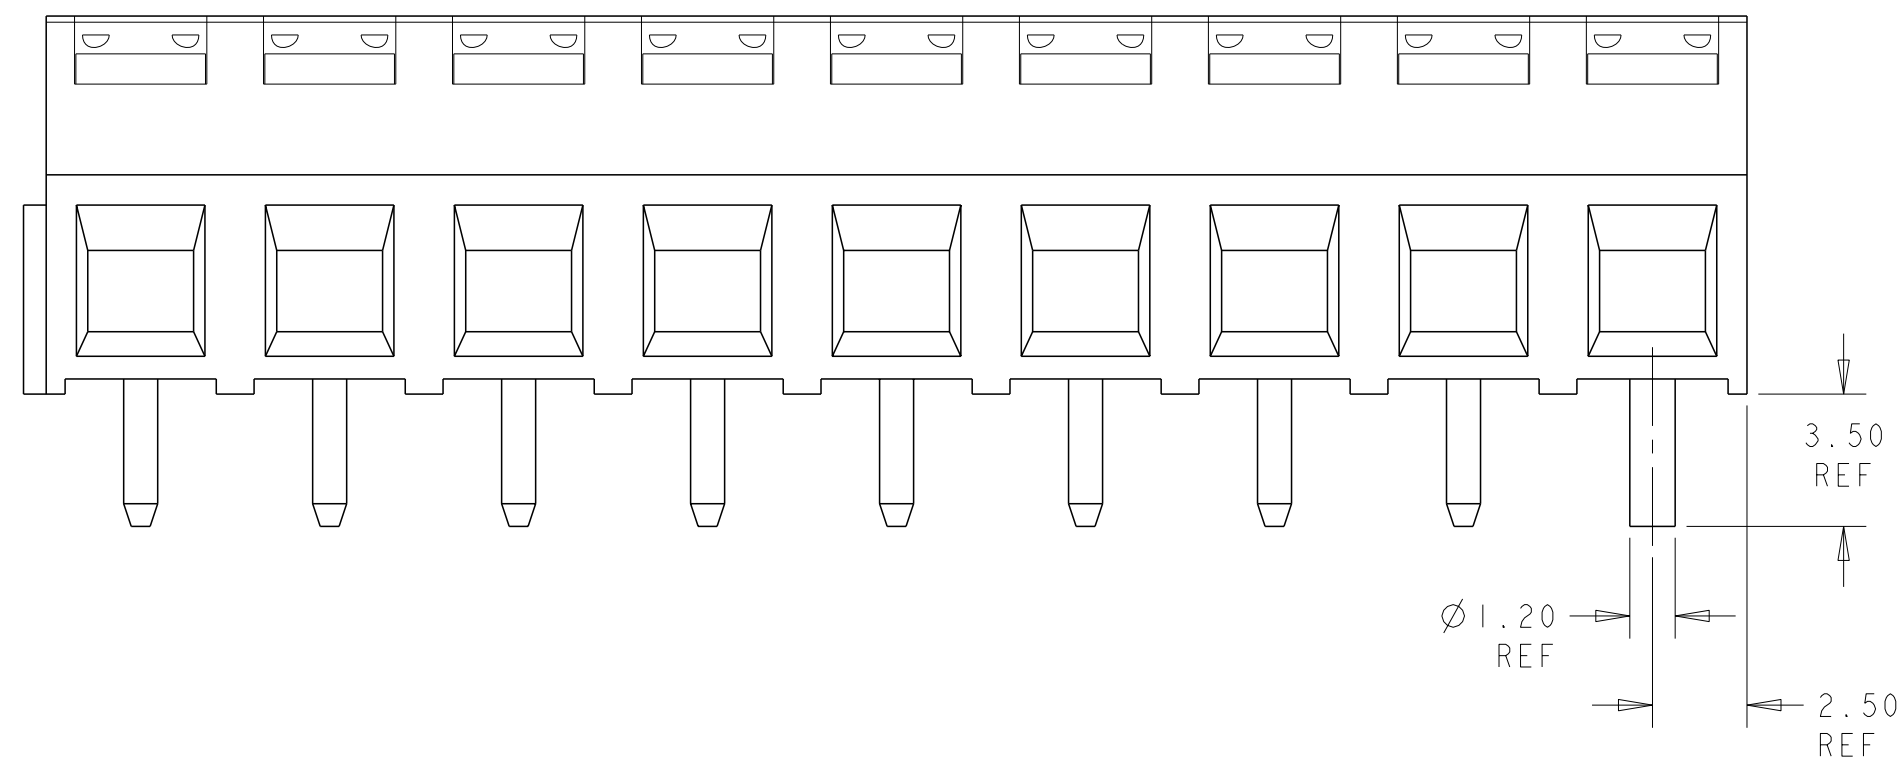

3-282836-5 AS SHOWN

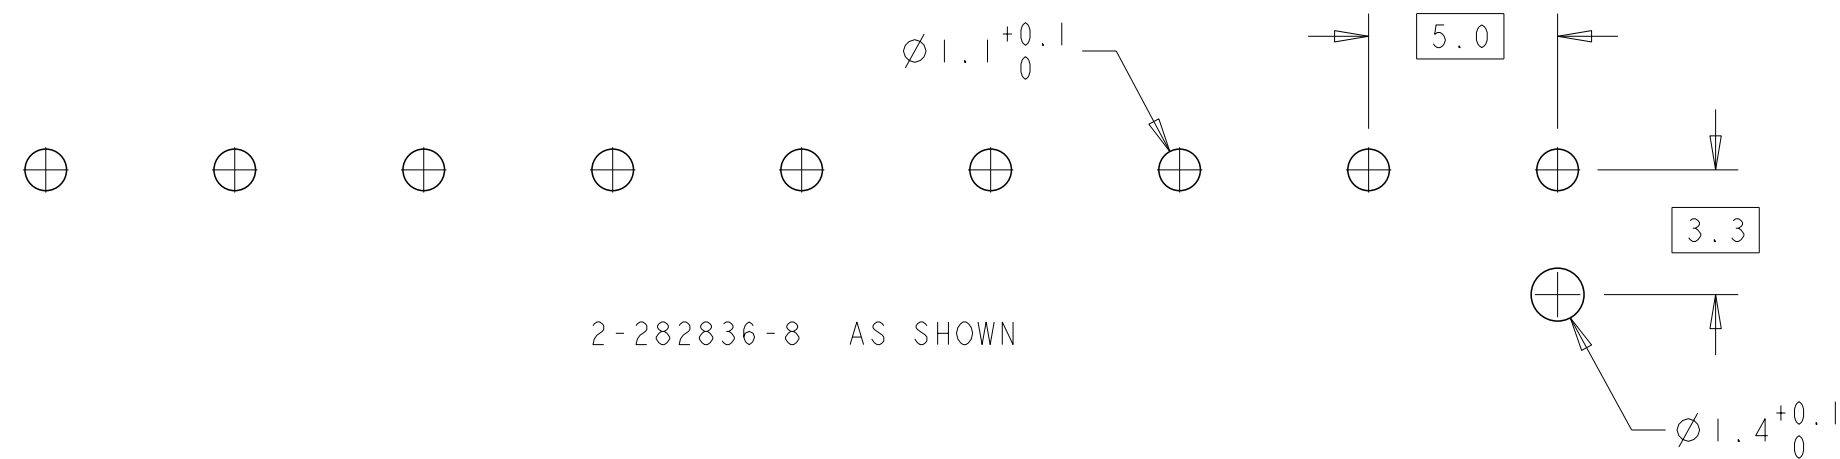

2-282836-8 AS SHOWN


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON	28SEP2007		 TE Connectivity	
		CHK C. RICHARD	28SEP2007			
DIMENSIONS:		APVD C. RICHARD	28SEP2007		NAME	
mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		TERMINAL BLOCK, PCB MOUNT, SIDE WIRE ENTRY, STACKING WITH INTERLOCK, 5.00mm PITCH		
		0 PLC ±.2 1 PLC ±0.15 2 PLC ±0.15 3 PLC ±0.000 4 PLC ±0.000 ANGLES ±2°		PRODUCT SPEC - APPLICATION SPEC -		
MATERIAL		WEIGHT		SIZE	CAGE CODE	DRAWING NO
		-		A2	00779	C-282836
				RESTRICTED TO		
CUSTOMER DRAWING				SCALE	SHEET	REV
				5:1	2 OF 3	1

D


C

B


A

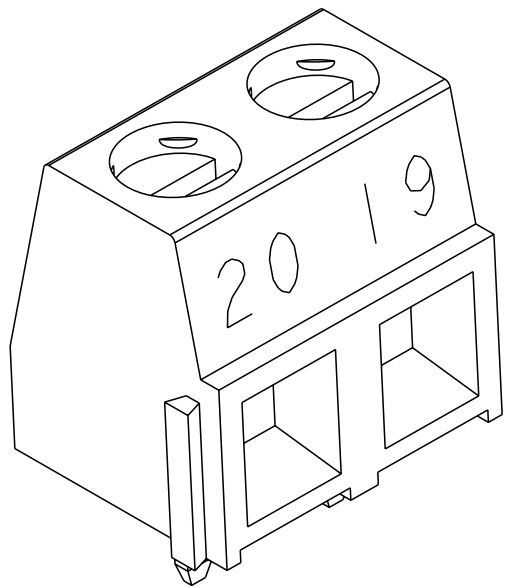

3-1986874-2 AS SHOWN

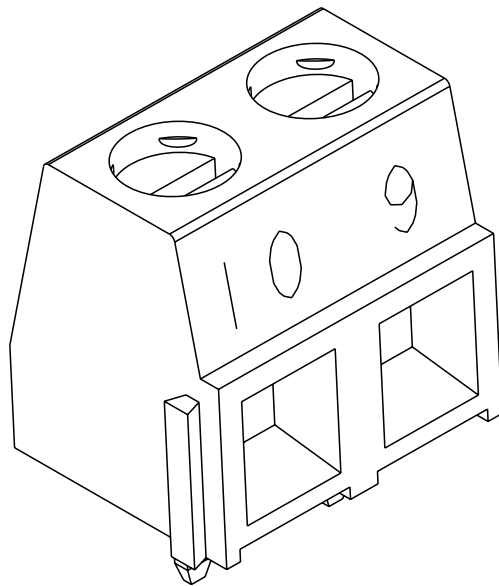

1986874-2 AS SHOWN

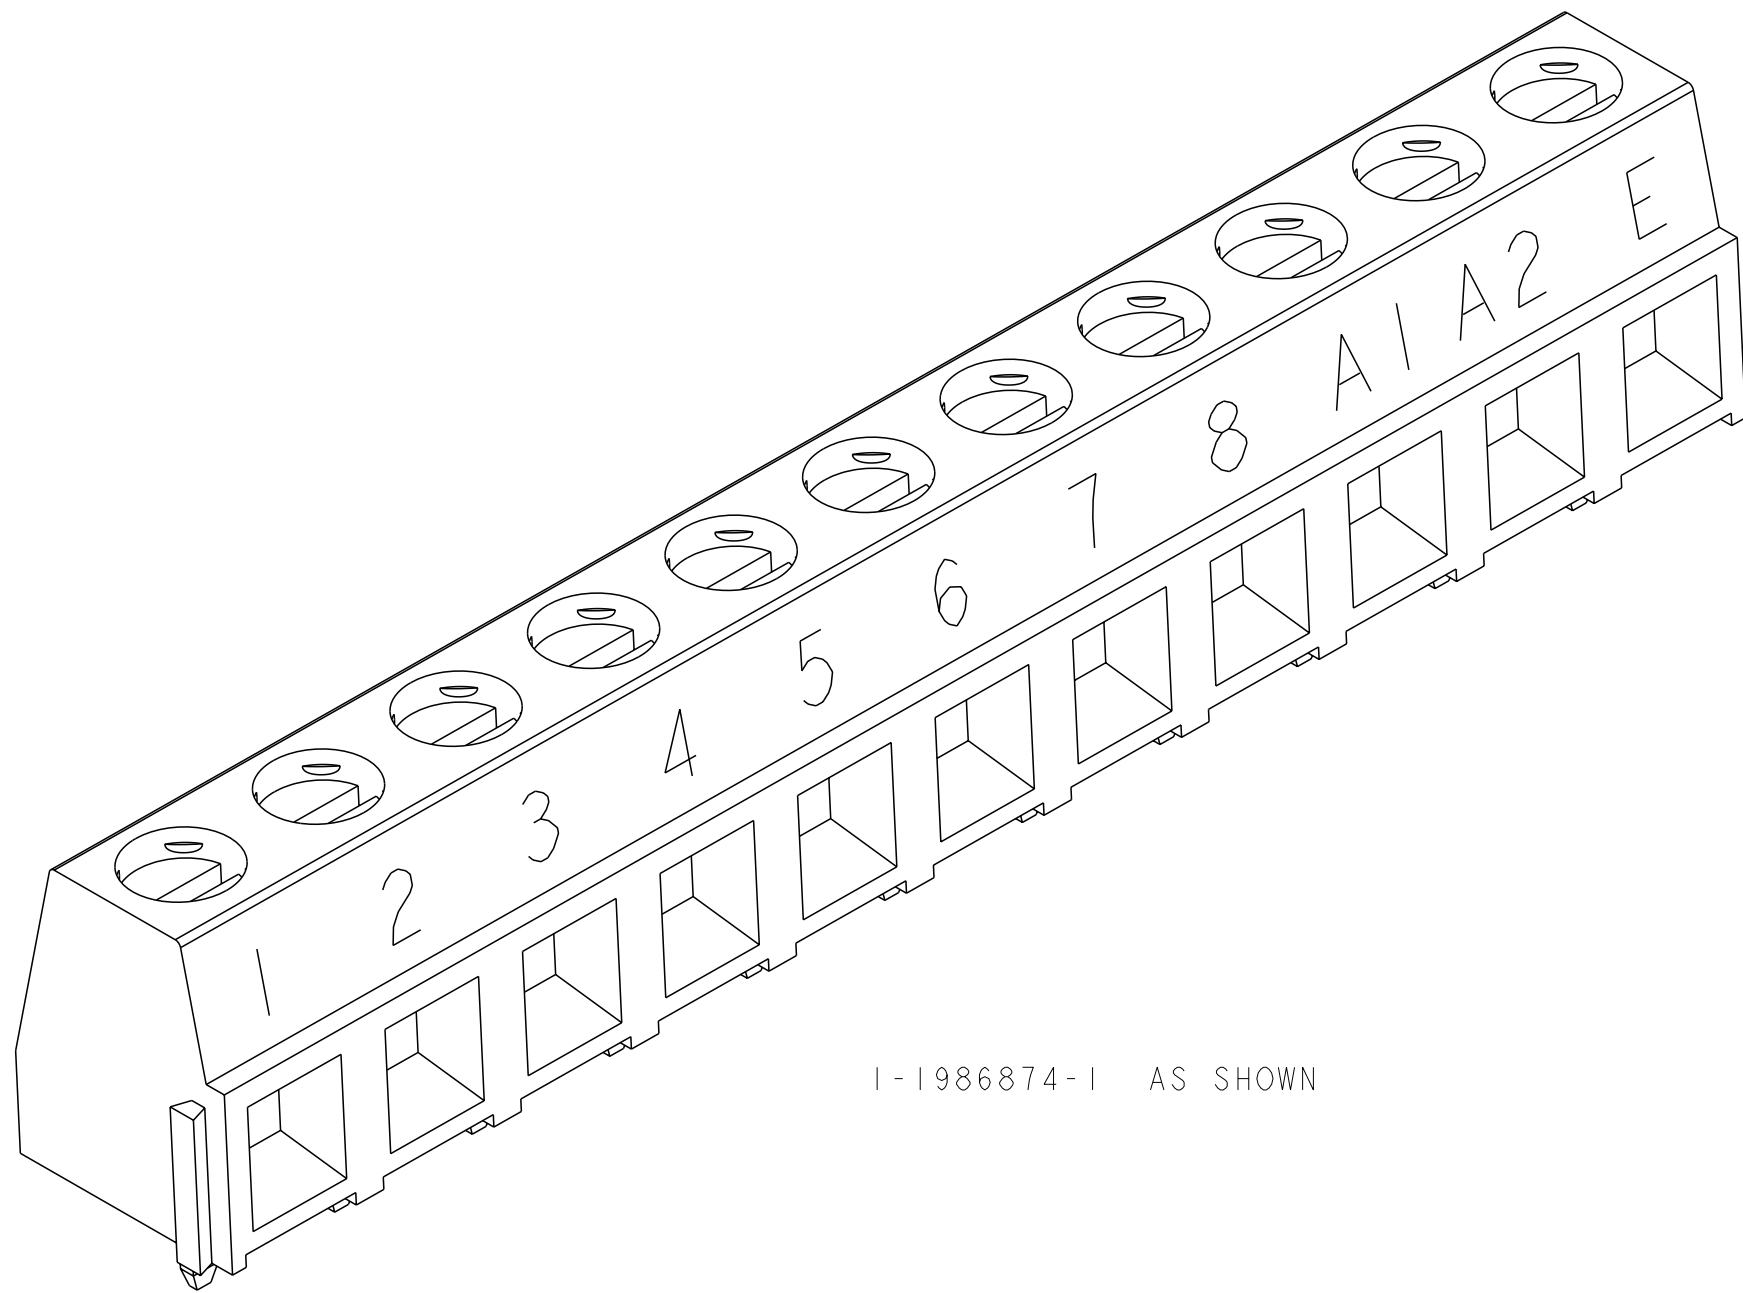

1-1986874-1 AS SHOWN

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±.
1 PLC	±0.2
2 PLC	±0.15
3 PLC	±0.000
4 PLC	±0.0000
ANGLES	±2°
FINISH	

DWN
S. WELDON
28SEP2007

CHK
C. RICHARD
28SEP2007

APVD
C. RICHARD
28SEP2007

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
TERMINAL BLOCK, PCB MOUNT,
SIDE WIRE ENTRY, STACKING
WITH INTERLOCK, 5.00mm PITCH

SIZE
A200779

CAGE CODE
C-282836

DRAWING NO
C-282836

RESTRICTED TO

SCALE
4:1

SHEET
3 OF 3

REV
J

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9