
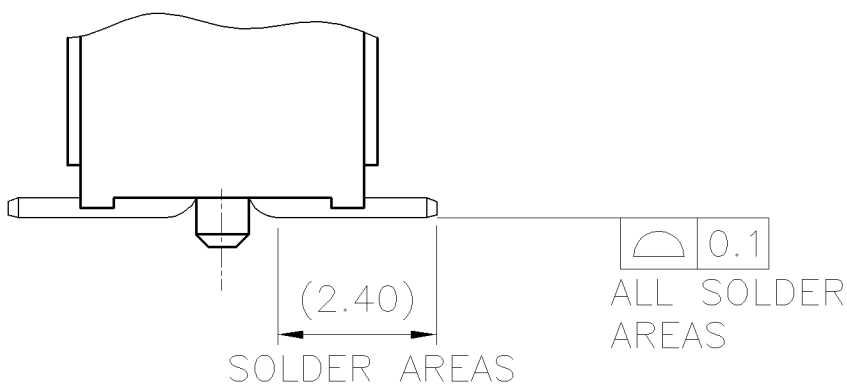
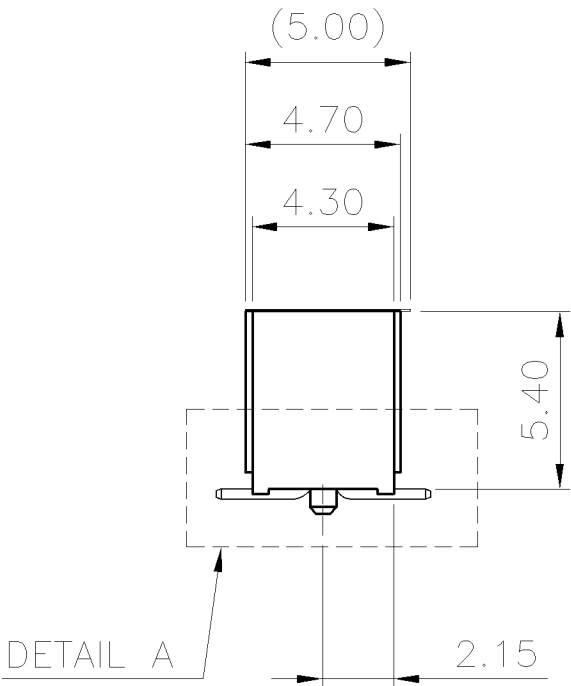
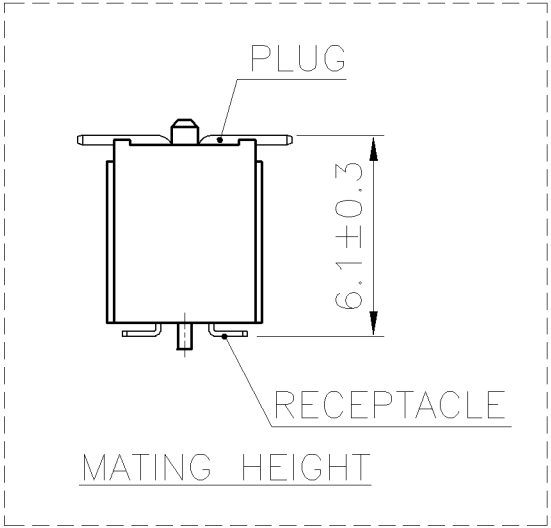
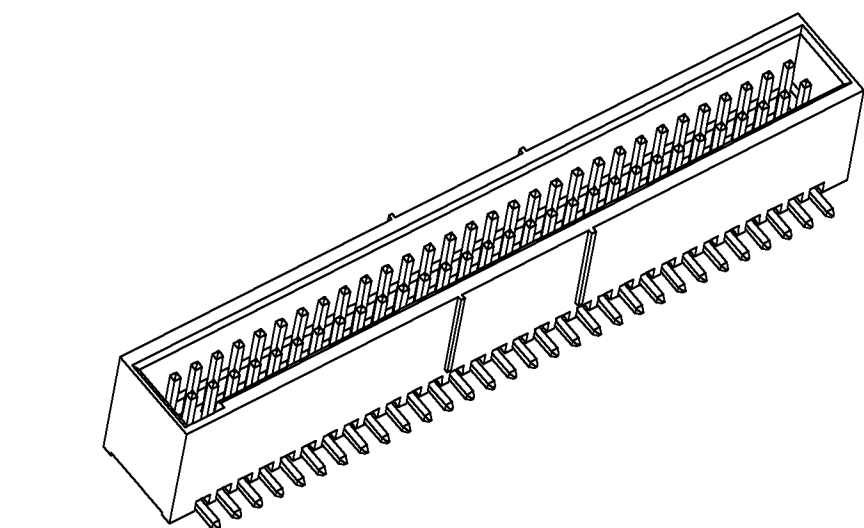
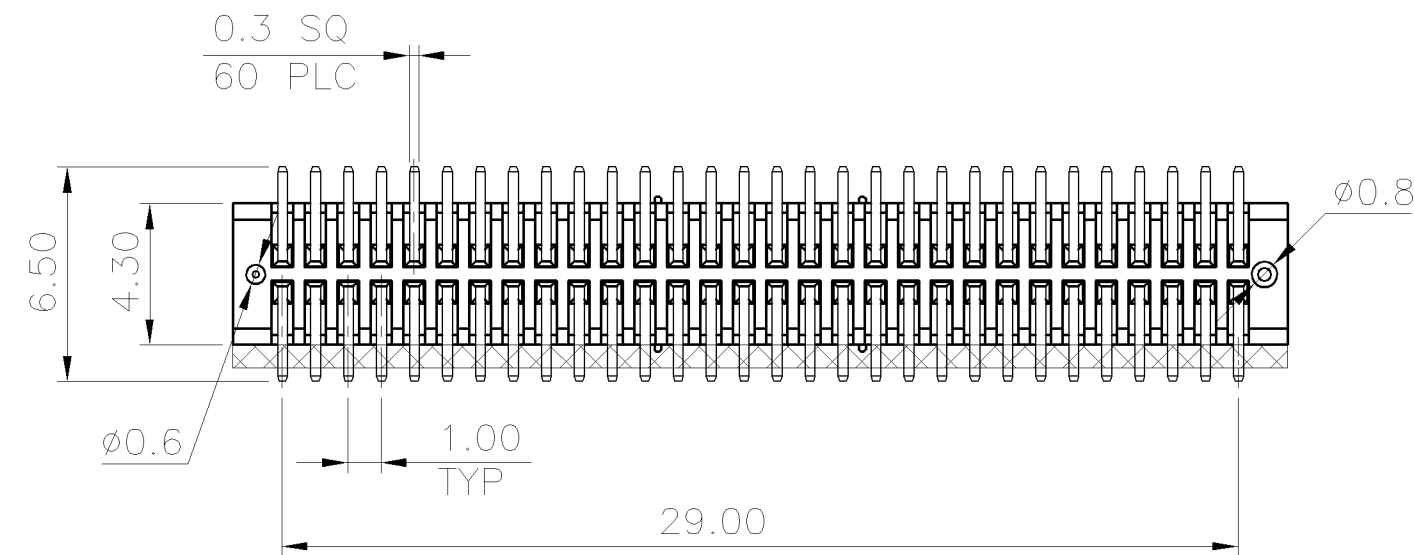
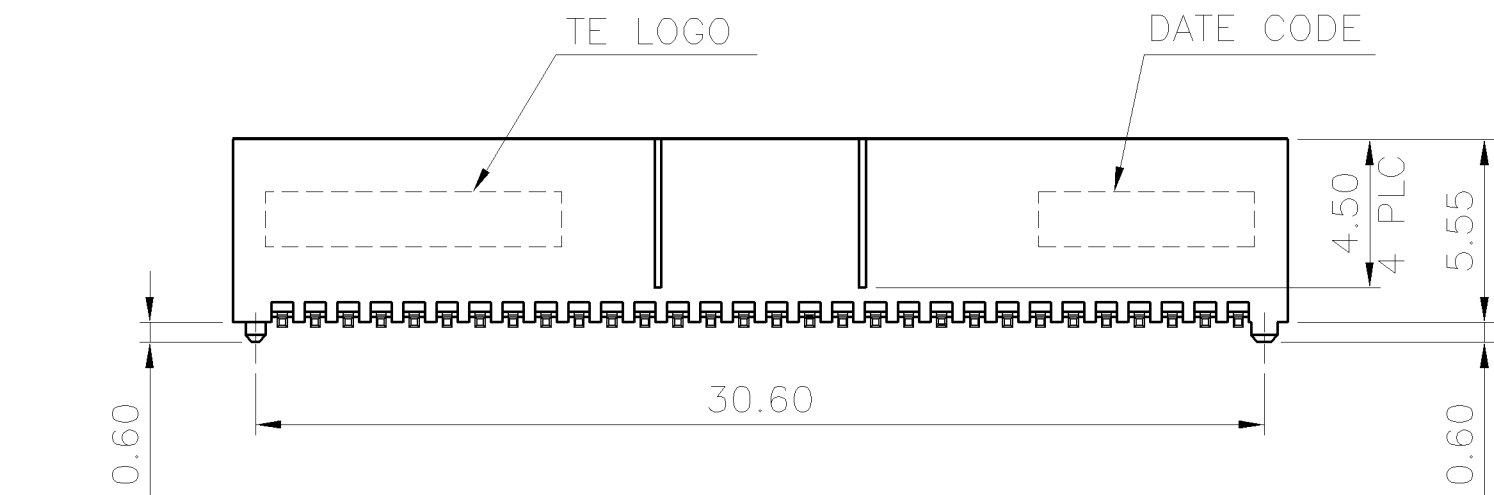



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT — BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
DW	—		A	RELEASED	04SEP08	AW	WK

- NOTE:
- MATERIAL:
HOUSING: PA9T WITH 33% GF, UL 94V-0, BLACK COLOR.
CONTACTS: BRASS.
MYLAR: PI.
 - FINISH:
CONTACTS: GOLD FLASH OVER 1.27 μ m [50 μ "] MIN. NICKEL ON ENTIRE CONTACT.
 - PART NUMBER OF MATING RECEPTACLE: 1775731-1.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE TEST SPEC. 109-201, CONDITION B.

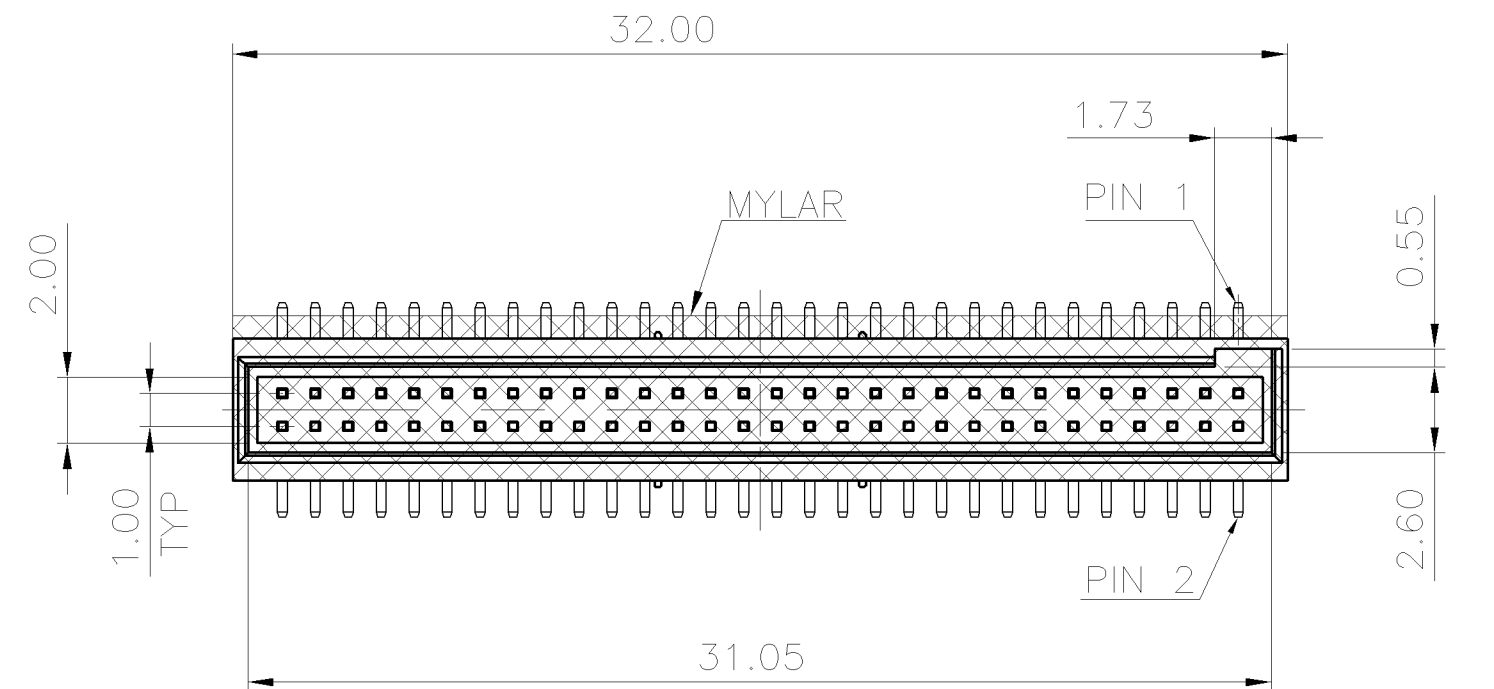

DETAIL A
SCALE 2:1

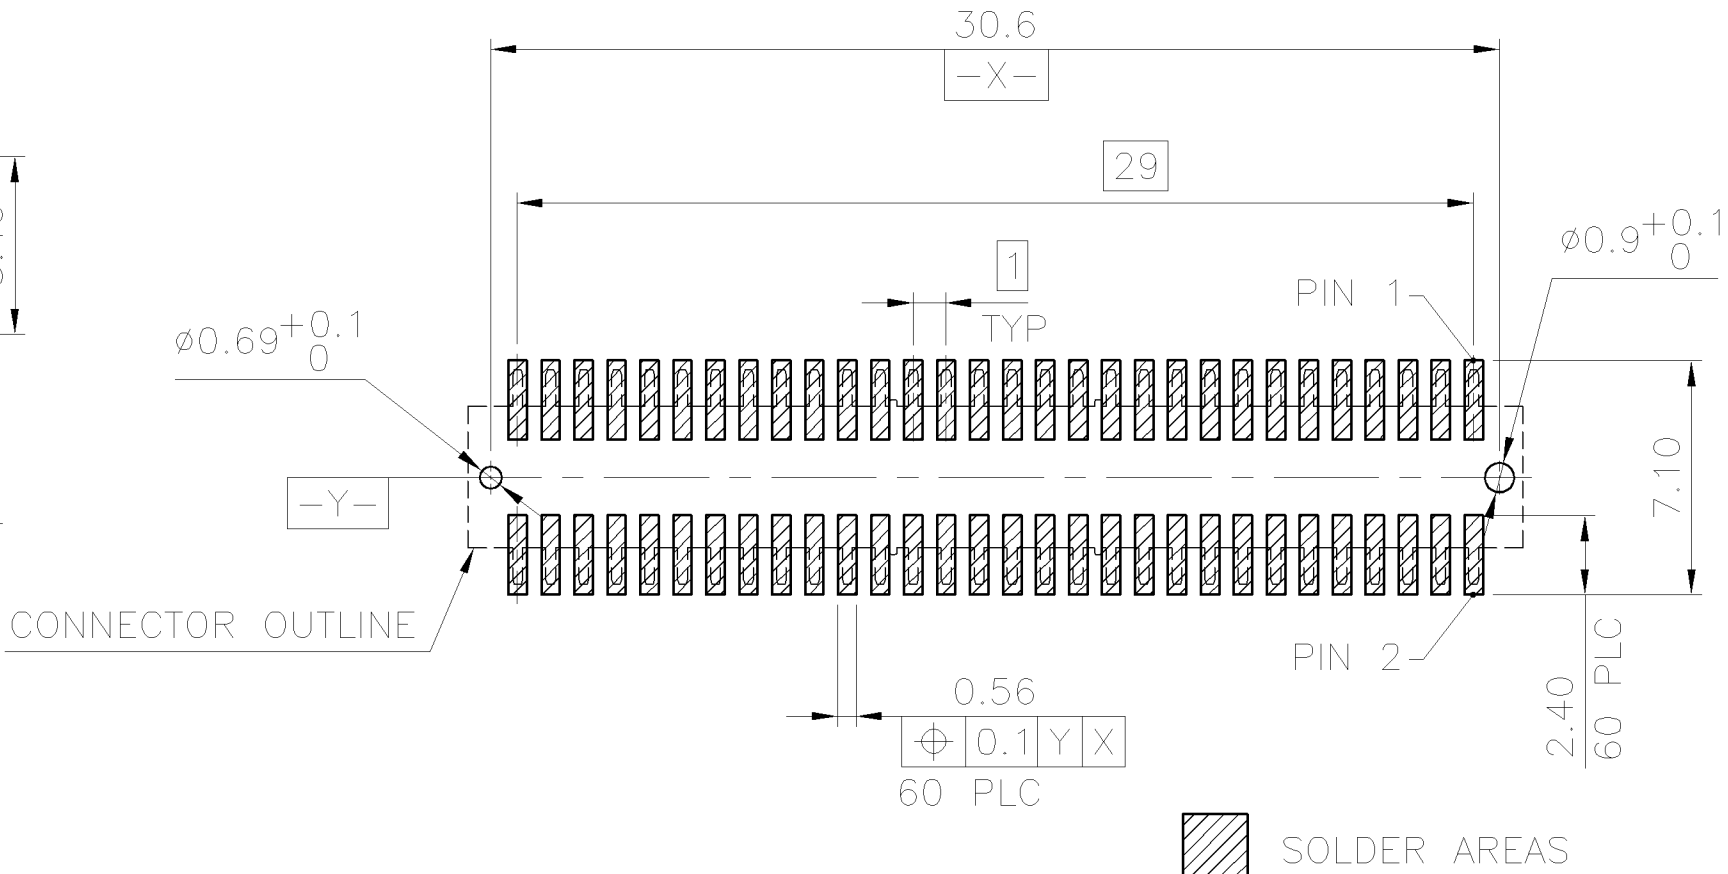

TOLERANCE: ± 0.05 , THICKNESS: 1.2mm
RECOMMENDED PCB LAYOUT
(TOP VIEW)

1775730-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. WU	04SEP2008	Tyco Electronics Corporation Taipei, Taiwan			
		CHK S. CHIEN	04SEP2008				
		APVD W. KODAMA	04SEP2008	NAME 1.0 PITCH BOX HEADER, TWO-ROW, 60 POSITION, SMT, 6.1 MATING HEIGHT, PLUG			
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-57708		SIZE A3	
				APPLICATION SPEC —		CAGE CODE 00779	
						DRAWING NO C-1775730	
MATERIAL SEE NOTE		FINISH SEE NOTE		WEIGHT 0.98 GRAMS		RESTRICTED TO —	
				CUSTOMER DRAWING		SCALE —	
						SHEET 1 OF 2	
						REV A	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-

© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

49.1

44.5

LABEL

ø330

500 MIN.

PEELING ANGLE
165° ~ 180°ABOUT 160 MM LONG
UNLOADED SECTION

PRODUCT LOADING SECTION

ABOUT 100 MM LONG
UNLOADED SECTION

TOP OF TAPE

4±0.1

2±0.15

PIN 1

ø1.5^{+0.1}₀

44±0.3

40.4±0.1

20.2±0.15

6.85^{+0.2}_{-0.1}

5.9±0.1

16±0.1

DETAIL G

32.18±0.1

1.7±0.1

1.5±0.1

R0.75±0.1

DETAIL G
4:1

0.2±0.05

PARTITION
DIMENSIONS:
330 X 330 X 3.5TAPE & REEL
7 PCS

VOID FILLER

PARTITION

BOX
DIMENSIONS:
360 X 360 X 410

LABEL

NOTE:

1. MATERIAL:
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.

2. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
3. PEELING SPEED: 300 mm/min.
4. EACH BAG SHALL BE INCLUDED: DESICCANT.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

MM

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

MATERIAL

DWN 04SEP2008

A. WU

CHK 04SEP2008

S. CHIEN

APVD 04SEP2008

W. KODAMA

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

Tyco Electronics Corporation
Taipei, Taiwan

NAME

1.0 PITCH BOX HEADER, TWO-ROW, 60
POSITION, SMT, 6.1 MATING HEIGHT,
PLUG

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C=1775730

SCALE

SHEET

2 OF 2

REV

A

600	7	4200 PCS	9.39 KG	4.12 KG
PCS/ TAPE	REELS/ BOX	QUANTITY	GROSS WEIGHT	NET WEIGHT

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9