



# CFM100M SERIES

## 100W MEDICAL&ITE OPEN FRAME AC-DC MODULES WITH PFC



### Features

- \* Universal Input Range 90 ~ 264VAC
- \* Medical and ITE Safeties
- \* 3"x 5" Compact Size
- \* Less than 1 U high
- \* Industry Standard Pin Out
- \* Active PFC Meets EN61000-3-2
- \* High Efficiency up to 91%
- \* Meets CISPR/FCC Class B
- \* Remote Voltage Sense
- \* Over Voltage Protection
- \* Continuous Short Circuit Protection
- \* No load Power Consumption<0.5W



MODEL	OUTPUT VOLTAGE	MAX. LOAD	MIN. LOAD	RIPPLE & NOISE	VOLTAGE ADJ. RANGE	VOLTAGE ACCURACY	LINE REGULATION	LOAD REGULATION	% EFF. (Typ.)
CFM100M050	5V	20A	0A	2%	4.75~5.25	±1%	±0.5%	±1%	83%
CFM100M075	7.5V	13.4A	0A	2%	7.13~7.88	±1%	±0.5%	±1%	87%
CFM100M090	9V	11.2A	0A	1%	8.55~9.45	±1%	±0.5%	±1%	88%
CFM100M120	12V	8.4A	0A	1%	11.4~12.6	±1%	±0.5%	±1%	89%
CFM100M150	15V	6.7A	0A	1%	14.25~15.75	±1%	±0.5%	±1%	89%
CFM100M180	18V	5.6A	0A	1%	17.1~18.9	±1%	±0.5%	±1%	90%
CFM100M240	24V	4.2A	0A	1%	22.8~25.2	±1%	±0.5%	±1%	91%
CFM100M280	28V	3.6A	0A	1%	26.6~29.4	±1%	±0.5%	±1%	91%
CFM100M360	36V	2.8A	0A	1%	34.2~37.8	±1%	±0.5%	±1%	91%
CFM100M480	48V	2.1A	0A	1%	45.6~50.4	±1%	±0.5%	±1%	91%

Specifications are subject to change without notice.

## Specifications

### INPUT SPECIFICATIONS:

Voltage .....	90~264Vac
Frequency .....	47 to 63Hz
Inrush Current .....	80A max. @240Vac
Leakage Current .....	300uA max.

### OUTPUT SPECIFICATIONS:

Holdup Time .....	16ms typ.
Short Circuit Protection .....	Hiccup mode(Auto Recovery)
Adjustment Range on Vout.....	±5%
Over Voltage Protection .....	Recycle AC input to restart
Temperature Coefficient .....	±0.05%/°C

### GENERAL SPECIFICATIONS:


Isolation .....	Input to output = 5,656VDC
Operating Temperature .....	-20°C ~ 70°C (see Derating Curve)
Storage Temperature .....	-20 ~ 85°C
Humidity .....	93% RH max. Non condensing
Cooling .....	Natural Convection
Switching Frequency .....	90KHz Typical
MTBF .....	MIL-HDBK-217F, GB, 25°C/115VAC ..... 200K hrs min.
Altitude .....	3000m
Dimensions .....	5.000x3.000x1.050inches (127.00x76.20x26.67mm)
Weight .....	270g (0.6Pounds)

### SAFETY AND EMC:

Emission and Immunity .....	EN55024, EN61000-6-1, EN61204-3 EN60601-1-2, EN61000-3-2 Class A, B, C, D, EN61000-3-3 EN55011 Class B, EN55022 Class B, FCC Part15 Class B
Safety .....	IEC60601-1, EN60601-1, UL60601-1 IEC60950-1, EN60950-1, UL60950-1

## CFM100M Series Derating Curve

### CFM100M

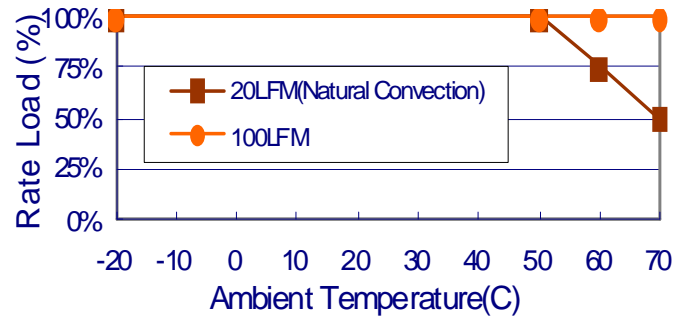


### NOTE:

- CFM100M050: Add a 0.1uF ceramic capacitor and 220uF E.L. capacitor to output for Ripple & Noise measuring @20MHz BW.  
Other Model: Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for Ripple & Noise measuring @20MHz BW.
- Line regulation is measured from High Line to Low Line with full load.
- Load regulation is measured from Full to 10% load.
- Connectors: AC input: Molex 5277 or equivalent  
DC output: Molex 5273 or equivalent
- DC output pin 1, 2, 3, 4: Vout (-), DC output pin 5, 6, 7, 8: Vout (+)

## CFM100M Series

All Dimensions are in inches[mm]

Tolerance: Inches:x.xxx= ±0.02  
Millimeters:x.xx= ±0.5

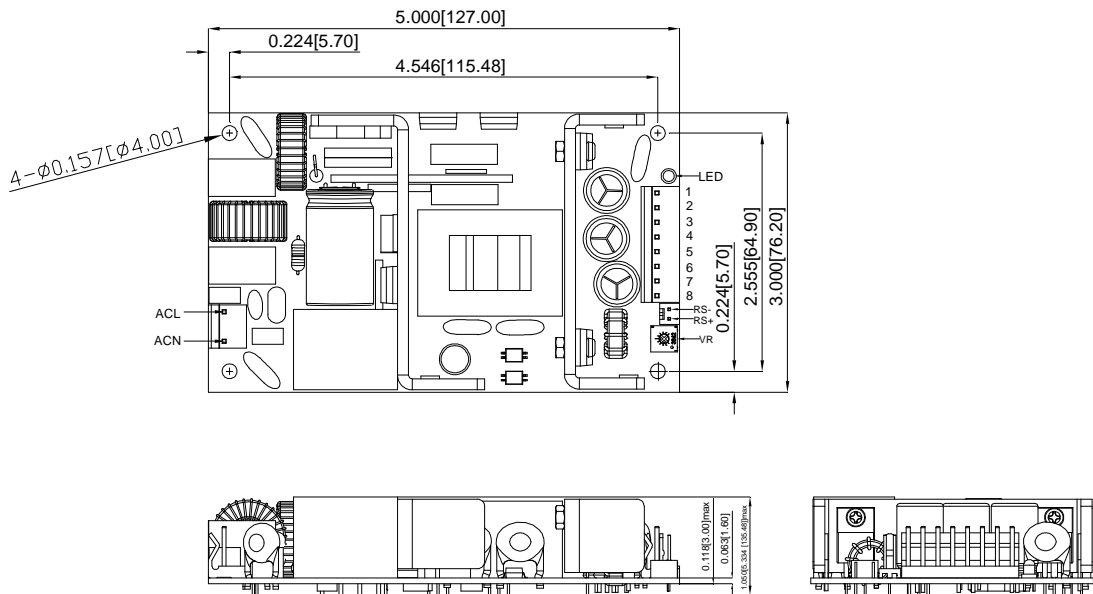

Typical at 25°C, nominal line and 75% load, unless otherwise Specified

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9